

Site Air-Permeability of HPSFR and Conventional Concretes

Roberto Torrent, Marco di Prisco, Verónica Bueno and Fabio Sibaud

Synopsis: An investigation in an industrial building devoted to manufacturing equipment for the pharmaceutical industry was carried out. Stringent requirements were set for the building, in particular a very low permeability was required against the relatively high water-table. The design of the building, as well as the quality of the concrete, was concerned with providing an impermeable barrier, besides structural safety and functionality. Different concrete qualities were used for different parts of the building. The most critical areas were built with steel fiber reinforced concrete (SFRC), both precast and cast *in situ*. In particular, some slabs were cast *in situ* with self-compacting (SCC-SFRC). Concrete samples were cast on site and taken to the laboratory for testing mechanical and durability performance. In order to verify the degree of impermeability reached in the end product, on site air-permeability measurements were conducted on representative elements of the structure. The paper presents and analyzes the air-permeability results obtained on several different elements, concluding that the cast on site SCC-SFRC presents a unique extremely low permeability and that the external wall tested has an air-permeability low enough to withstand the environment to which it is exposed. On the contrary, some non-critical internal elements, both cast on site and precast, present rather high and scattered air-permeability values.

Keywords: air-permeability, durability, fiber-reinforced concrete, site testing, water-tightness

1 ACI member **Roberto Torrent**, Civil Eng., PhD, is a Researcher and Private Consultant at Materials Advanced
2 Services Ltd., Argentina. He has been active in both ACI and RILEM TCs. His research interests include
3 durability testing and service life design of reinforced concrete structures, topics on which he has published
4 extensively.

6 **Marco di Prisco**, Struct. Eng., PhD, is full professor of Structural Design at the Department of Civil and
7 Environmental Engineering, Politecnico di Milano. Fib Presidium and DAC Rilem member, he is convener of
8 CEN TC250/SC2/Wg1/Tg2 to introduce FRC in EC2 and President of Italian Association for Building
9 Industrialization. His research interests include cement-based composite materials, theoretical and experimental
10 analysis on reinforcement-concrete interaction basic mechanisms, r/c and p/c structural elements, soil-structure
11 interaction, prefabricated structures, structural response at exceptional loads.

13 **Verónica Bueno**, Chem. Eng., PhD, is a Researcher and Private Consultant at Quali-TI-Mat Sagl, Switzerland.
14 Her research interests focus on the corrosion of metals, in particular of reinforcing steel, on assessment of
15 service life of reinforced concrete structures, as well as on durability and corrosion on site testing.

17 **Fabio Sibaud**, Struct. Eng. with extensive experience in planning, design, and construction of municipal,
18 industrial, commercial, and housing projects, working as site engineer, construction inspector and project
19 manager. He worked as assistant professor at the Politecnico di Milano and as external lecturer in graduate
20 courses on structural engineering. His clients include various construction and geotechnical engineering
21 companies, local authorities, contractors and other private companies.

INTRODUCTION

23 This work refers to an industrial building meant for a company devoted to manufacturing equipment for the
24 pharmaceutical industry. It is a two-storey building, as illustrated in Fig. 1, located in the city of Como, Italy.

26 Stringent requirements were set for the building; in particular a very low permeability was required against the
27 relatively high water-table. The design of the building, as well as the quality of the concrete, was concerned with
28 providing an impermeable foundation barrier, besides structural safety, durability and functionality.

30 Different concrete qualities were used for different parts of the building. The most critical areas were built with
31 steel fiber reinforced concrete (SFRC) cast *in situ*. Some slabs were cast with self-compacting SFRC (SCC-
32 SFRC).

34 To verify the degree of impermeability reached in the end-product, on site air-permeability measurements were
35 carried out on representative elements of the structure.

37 The main objective of the investigation was to measure – on site - the air-permeability of the SFRC foundation
38 beams and slabs, responsible of transferring loads to the ground and providing water-tightness to the building.
39 Given the wide range of concretes used in the construction, some other elements were also tested for
40 comparative purposes. In particular, extensive tests were made on an external wall, exposed to the environment,
41 to check its expected durability performance. In some cases, parallel tests were conducted on laboratory
42 specimens used for structural characterization and quality control of the concretes.

STRUCTURAL ELEMENTS INVESTIGATED

44 Table 1 describes the main elements tested for air-permeability and their structural function. Figs. 2 and 5 show
45 pictures of the elements tested.

CONCRETE MIX DESIGNS AND MAIN CHARACTERISTICS

Proportions of the Mixes

48 Table 2 presents the final design of the mixes used for the construction of the different elements of the structure.
49 These mix designs were arrived at after different trials, both in the laboratory and in pilot placements on site.

Materials Used

The cement used for the construction of the building is CEM IV/A 42.5R LH, according to the classification of European Standard EN 197-1 [1]; it is a pozzolanic cement, containing between 11 and 35% of pozzolan, classified as low heat of hydration, with a rapid development of a moderate strength. Only precast columns were made of OPC cement Type CEM I 52.5 R.

The aggregate used was separated into five fractions: 0-4 mm, 0-8 mm, 4-16 mm, 8-14 mm and 11-22 mm: the grading curves are reported in Fig. 6. **SOLTANTO 3 CURVE ?**

Several chemical admixtures were introduced into the mixes. In the SCC-SFRC, DYNAMON SR41 (a superplasticizer-retarder) and MAPECURE E (shrinkage reducer), both manufactured by MAPEI, were used. In the concrete without fibers, Sikaplast 90 and SIKA Plastiment VZ were used, both to increase the workability and the **related setting / slump retention?** time.

Hooked-end steel fibers, commercially known as Dramix 4D 65/60BG, manufactured by Bekaert, were used in the SFRC mixes. They are 60.5 mm (2.4 in) long and 0.9 mm (0.035 in) in diameter, i.e. with an aspect ratio 65, with yield strength $f_{yk} = 1600$ MPa (229 ksi).

Powdered Limestone filler was added into mix G to optimize the mix design in terms of strength level, flowability and cost.

Mechanical Properties of the Concretes

The mix designs were made to provide adequate self-compacting workability **to the SFRC**, checked by tests in the laboratory (L-box) and in pilot placements on site. The SFRC mixes had to comply with the requirements corresponding to SFRC Class 3c of the Model Code 2010 [2], that specifies residual stresses of $f_{R1,k} = 3.0$ MPa (429 psi) and $f_{R3,k} = 2.7$ MPa (386 psi), for crack mouth opening displacement CMOD of 0.5 mm (0.02 in) and 2.5 mm (0.1 in), respectively. These values, as well as the flexural tensile strength (Limit Of Proportionality) $f_{ct,L}$, were obtained from 3-point bending tests on notched beams, according to European Standard EN 14651 [3]. The mechanical properties measured on concretes with the different mix designs are reported in the lower part of Table 2.

SITE AIR-PERMEABILITY EXPERIMENTAL INVESTIGATION

Air-permeability tests were performed on site, on the as-cast concrete surface condition, following the prescriptions of Swiss Standard SIA 261/1:2013, Annex E “Air-Permeability on the Structure” [4].

The test applied is the non-destructive “double-chamber vacuum cell” method, in which the rate of pressure rise in the previously evacuated inner chamber is recorded, which relates to the permeability of the underlying concrete. The pressure in the inner and outer (guard-ring) chamber is kept balanced by means of a regulator, resulting in a unidirectional flow into the inner chamber. Under these conditions, a model allows calculating the coefficient of air-permeability kT of the surface concrete layers affected by the test. kT is expressed in m^2 ($1 m^2 = 10.76 ft^2$). For more details, the reader can refer to [5].

Two instruments were used for the tests, namely a 3rd generation instrument *PermeaTORR* (Fig. 3) and a 4th generation instrument, *PermeaTORR AC* (Active Cell), see Fig. 5. On some spots, showing well differentiated kT values, the coefficient of air-permeability kT was measured with both instruments, obtaining quite similar results, as shown in Fig. 7, confirming what has been reported in [6].

As stipulated in [4], prior to testing the air-permeability, the surface moisture of the concrete was measured with an electrical impedance instrument (CMEX II), to check that the indication was not above 5.5%, which was the case for all tests.

Moreover, kT tests were performed on cast specimens used for material characterization and quality control. The results of the site tests are shown on the left-hand side of Table 3, whilst those obtained on laboratory specimens are shown on the right-hand side of the Table. Since kT follows a log-normal distribution (Annex D of [7,8]), the central value reported is the geometric mean of the measured values (mean of the logarithms) and for the scatter is the standard deviation of the \log_{10} of the values (sLOG).

ANALYSIS OF THE RESULTS

To facilitate their analysis, the results presented in Table 3 are plotted in graphical form in Fig. 8. The dot represents the value of kT_{gm} and the equal segments at each side of the dot represent $\pm sLOG$ (on a logarithmic scale x-axis).

At the top of the chart the classification of permeability, based on kT , is shown. Comparative tests have shown that the classification matches well that of ASTM C1202, based on electric charge passed (Coulombs) [9] which, incidentally, is not a suitable test to assess the ‘permeability’ of SFRC due to the conductive steel fibers. In addition, a short vertical segment at $kT = 2.0 \cdot 10^{-16} \text{ m}^2$ is drawn, the meaning of which will be explained later.

What is immediately obvious in Fig. 8 is the wide range of kT values obtained on the different concretes tested. Indeed, the values of kT recorded “in situ” on the different elements span 4 orders of magnitude, from “Very Low” to “High” permeability classes.

SCC-SFRC Elements

The better permeability performance of the SCC-SFRC foundation elements (FB, FS1, FS2), compared with the RC elements (including the cast-on-site walls and the precast columns) is evident in Fig. 8. This can be attributed to a mix design with low w/c ratio, to the inclusion of a shrinkage-reducing admixture and, furthermore, to the positive contribution of steel fibers in preventing shrinkage cracking.

Looking at the kT values of SCC-SFRC in more detail, it results that the foundation slabs on the ground (FS1 and FS2) present lower permeability than the foundation beams and even than the laboratory specimens (flexural beams). The foundation beam was made with mix E, while the two foundation slabs were made of the same nominally identical mix G which is favoured by filler addition. Moreover, this better performance may lie on the fact that the ground slabs were kept immersed in a ponded with water blade for several weeks after casting, thus receiving a better curing than the other elements/specimens. This applies also to the suspended slab that, although made with conventional concrete (but with mix S), was not immersed ponded as the foundation slabs were. NON ESSENDO SCC-SFRC NON DEVONO ESSERE IN QUESTA SEZIONE

The kT_{gm} value recorded for foundation slab FS1, $0.0045 \cdot 10^{-16} \text{ m}^2$, is the lowest ever recorded by the authors on site concrete. Compare it with values, recorded on precast elements made with concretes meant to last over 100 years in a marine environment, of $0.027 \cdot 10^{-16} \text{ m}^2$ in the Port of Miami Tunnel [10] and of $0.069 \cdot 10^{-16} \text{ m}^2$ in the Hong-Kong-Zhuhai-Macao Link [11]. These reported data match well the values obtained for SCC-SFRC in elements FS2, SS and FB. This High Performance, coupled with the self-compacting performance, indicates that the SFRC concrete cast on site in this building can be classified as a HP-SFRC.

External Wall

The case of the external wall merits some analysis. The external face of the building walls will be directly exposed to the environment. The city of Como has a Mediterranean climate, quite rainy (around 1300 mm/year or ~50 in/year) and with temperatures occasionally dropping below 0°C (32°F) in winter. It can be classified as XC4 (severe carbonation risk) and XF1 (mild frost risk), according to EN 206. For ACI 318, that would correspond to exposure classes C1 and F1.

For climates XC4 and XF1, Swiss Standard SIA 262/1:2013 [4] specifies a “statistical upper limit” of the air-permeability $kT_s = 2.0 \cdot 10^{-16} \text{ m}^2$. It is worth mentioning that the building in question lies less than 10 km of the Italian/Swiss border, where the requirements of [4] apply.

The compliance criterion of SIA 262/1:2013 [4] states that not more than 1 result out of 6 may exceed the specified value kT_s ($2.0 \cdot 10^{-16} \text{ m}^2$ for this exposure case) and that, if just 2 results exceed kT_s , another 6 tests should be conducted, out of which, again, not more than 1 may exceed kT_s . Fig. 9 shows the O-C curve for that conformity criterion, showing in abscissae the proportion of the lot having a permeability kT higher than kT_s and in ordinates, the probability of accepting such a lot, applying the Swiss conformity criterion [7,9].

The intensive 31 test results obtained on the external wall EW showed a $kT_{gm} = 0.21$ and a $sLOG = 0.82$ (Table 4); a simple calculation, assuming that $\log(kT)$ is normally distributed, indicates that the proportion of the wall with $kT > 2.0 \cdot 10^{-16} \text{ m}^2$ is just 12%. The O-C curve of Fig. 9 yields a probability of acceptance of such lot of 95%, which is a satisfactory result.

Just as a speculation, if internal walls IW1 and IW2 had been external, i.e. exposed to the same environment as wall EW, their probability of acceptance would have been the marginally acceptable level of 60% and the unacceptably low level of 20%, respectively.

Internal Columns

The values obtained on the precast columns are rather disappointing. They show a high kT_{gm} and a high scatter. A closer look to the surface of the elements showed a crazed skin, which may have affected the air-permeability measurements. However, on one spot, the removal of the skin revealed a visible crack on the concrete underneath; given that these internal elements play no role in terms of water-tightness or durability of the structure, the matter was not pursued further.

CONCLUSIONS

Based on the results of this experimental investigation, the following conclusions can be drawn:

1. The tests conducted on site showed a wide range of air-permeability values for the different elements investigated, reflecting the different mix designs and concreting processes involved.
2. The self-compacting, steel-fiber reinforced foundation concretes showed permeabilities in the range of “Low” and “Very Low” classes, suitable for their function as water-tight barrier against the high water-table level underneath. Based on their high performance, they can be classified as HP-SFRC.
3. To the knowledge of the authors, foundation slab FS1 showed record-low kT values for site concrete.
4. The intensively tested external wall, exposed to an environment that can be classified as XC4, XF1 (EN 206) or C1, F1 (ACI 318), showed results of kT in compliance with the upper limit $kT_s = 2.0 \cdot 10^{-16} \text{ m}^2$, specified in Standard SIA 262/1:2013 of neighboring Switzerland
5. The internal cast-on-site walls and precast columns showed “Moderate” to “High” air-permeability values, that are rather disappointing, but have no consequences on the serviceability and durability of the structure, given their indoors location

REFERENCES

- [1] European Committee for Standardization, “EN 197-1: Cement - Part 1: Composition, specifications and conformity criteria for common cements”, 2011.
- [2] Fédération Internationale du Béton, “fib Model Code for Concrete Structures 2010”, Wilhelm Ernst und Sohn Verlag für Architektur. 402, Berlin, Germany, 2013.
- [3] European Committee for Standardization, “EN 14651: Test method for metallic fibered concrete - Measuring the flexural tensile strength (limit of proportionality (LOP), residual)”, 2005.
- [4] SIA 262/1:2013, “Betonbau - Ergänzende Festlegungen”, Schweizer Norm, 1 August 2013, 52 p. (in German). Partial English Translation in: <http://m-a-s.com.ar/pdf/Translation%20of%20SIA%20262-1-2013%20referred%20to%20kT%20v1.1.pdf>
- [5] Torrent, R., “Non-Destructive Air-Permeability Measurement: from Gas-Flow Modelling to Improved Testing”, Paper 151, Microdurability 2012, Amsterdam, The Netherlands, 11-13 April, 2012.
- [6] Torrent, R. and Szychowski, J., “Innovation in Air-Permeability NDT: Concept and Performance”, XIV DBMC, Ghent, 29-31 May 2017, Proceedings, paper DBMC-p313
- [7] Jacobs, F., Denarié, E., Leemann, A. und Teruzzi T., “Empfehlungen zur Qualitätskontrolle von Beton mit Luftpermeabilitätsmessungen”, *Office Fédéral des Routes*, VSS Report 641, December 2009, Bern, Switzerland.
- [8] Torrent, R., “Recommendations for Quality Control of Concrete with Air-Permeability Measurements”, Translation into English of Chapters 1 and 2 + Annex D of [6], available at <http://www.m-a-s.com.ar/pdf/Swiss%20Recommendations%20for%20site%20measurement%20Ch%201%20and%202%20and%20Annex%20D.pdf>
- [9] Torrent, R., Denarié, E., Jacobs, F., Leemann, A. and Teruzzi, T., “Specification and site control of the permeability of the cover concrete: the Swiss approach”, *Materials and Corrosion*, V. 63, n 12, December 2012, pp. 1127–1133.
- [10] Torrent, R., Armaghani, J. and Taibi, Y., “Evaluation of Port of Miami Tunnel Segments: Carbonation and service life assessment made using on-site air permeability tests”, *Concrete International*, May 2013, pp. 39-46.
- [11] Li Kefei and Torrent, R., “Analytical and Experimental Service Life Assessment of Hong Kong-Zhuhai-Macau Link”, IABMAS 2016, Paper 427, Foz do Iguaçu, Brazil, 26-30 June, 2016.

TABLES AND FIGURES

Table 1—Characteristics of the elements tested for site air-permeability

Code	Function	Concrete Type	Mix Design	Cast	Age at Test (d)
FB	Foundation Beam	SCC-SFRC	E	on site	163
FS1	Foundation Slab	SCC-SFRC	G	on site	86
FS2	Foundation Slab	SCC-SFRC	G	on site	82
SS	Suspended Slab 1 st Floor	RC	S	on site	144
EW	External Wall	RC	P	on site	175
IW1,2	Internal Walls	RC	P	on site	176
PP1-3	Internal Precast Columns	RC	Columns	plant	n.a.

SCC=Self-consolidating concrete; SFRC= Steel-fiber reinforced concrete; RC= Reinforced concrete

Table 2—Composition and mechanical properties of the concrete mixes used in the investigated elements

Component or Property	Mix E	Mix G	Mix S	Mix P	Columns
Cement (kg/m ³) / (lb/yd ³)	470 / 792	380 / 641		360 / 607	480 / 808
Limestone Filler (kg/m ³) (lb/yd ³)	-	100 / 169		-	-
Water (kg/m ³) (lb/yd ³)	188 / 317	165 / 278		139 / 234	180 / 252
Superplasticizer (% cement wt.)	1.62	1.58		2.26	3.00
Shrinkage Reducer (% cement wt.)	0.85	1.44		-	-
Sand 0/3 mm (kg/m ³) (lb/yd ³)	-	-			620 / 1045
Sand 0/4 mm (kg/m ³) (lb/yd ³)	1008 / 1700	509 / 858		361 / 608	
Gravel 0/8 mm (kg/m ³) (lb/yd ³)	504 / 850	763 / 1286		721 / 1214	
Gravel 0/12 mm (kg/m ³) (lb/yd ³)	-	-		-	110 / 185
Gravel 4/16 mm (kg/m ³) (lb/yd ³)	171 / 288	424 / 715		-	-
Gravel 8/14 mm (kg/m ³) (lb/yd ³)	-	-		198 / 333	-
Gravel 8-15 mm (kg/m ³) (lb/yd ³)	-	-		-	410 / 690
Slag 8-16 mm (kg/m ³) (lb/yd ³)	-	-		-	350 / 589
Gravel 11/22 mm (kg/m ³) (lb/yd ³)	-	-		523 / 881	-
Steel Fibres (kg/m ³) (lb/yd ³)	35 / 59	35 / 59		-	-
w/c ratio	0.40	0.43		0.38	0.46
$R_{cm, cube}$ @ 28 d (MPa)/(ksi)		59.3 / 8.6			67/9.7
$f_{ct,L}^f$ @ 28 d (MPa)/(psi)*	4.06 / 589	2.69 / 390		-	-
$f_{R1,k}$ @ 28 d (MPa)/(psi)*	3.91 / 567	5.32 / 772		-	-
$f_{R3,k}$ @ 28 d (MPa)/(psi)*	3.86 / 560	4.06 / 589		-	-
Model Code SFRC Class	3d	5b		-	-

* assuming LogNormal distribution on test results of 12 beams, obtained at 35-60 days of age

Table 3—Statistical parameters of air-permeability test results obtained on site and in the laboratory

Site Tests				Laboratory Tests			
Element	No. of Tests	kTgm 10 ⁻¹⁶ m ²	sLOG	Specimen	No. of Tests	kTgm 10 ⁻¹⁶ m ²	sLOG
FB	7	0.058	0.71	Cubes 150mm / 5.9 in	11	0.330	0.57
FS1	6	0.023	0.22	Notched Beams*	13	0.103	0.34
FS2	6	0.0045	0.27				
SS	12	0.123	0.64				
EW	31	0.210	0.82				
IW1	12	0.389	1.23				
IW2	12	1.513	0.92				
PP1	8	0.725	1.06				
PP2	8	0.629	0.57				
PP3	8	2.103	0.81				

*L: 1500/59.1; H: 500/19.7; W:300/11.8 (mm/in)

 1 m² = 10.76 ft²



Fig. 1–Overview of the building during advanced construction stage



Fig. 2 – View of external wall and suspended slab (behind parapet)



Fig. 3 – kT test on Internal Wall 2



Fig. 4 – View of Internal Wall 1, Foundation Slabs 1 and 2 and Foundation Beam

Fig. 5 – kT test on Foundation Beam

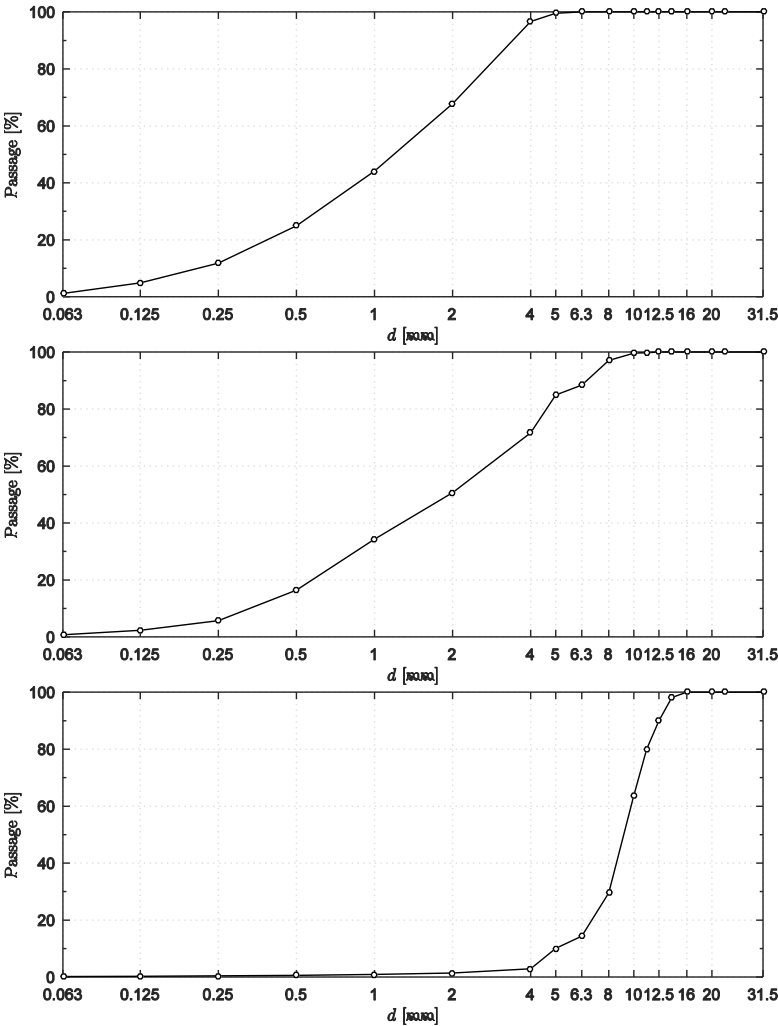


Fig. 6 – Grading curves of the aggregate fractions used.

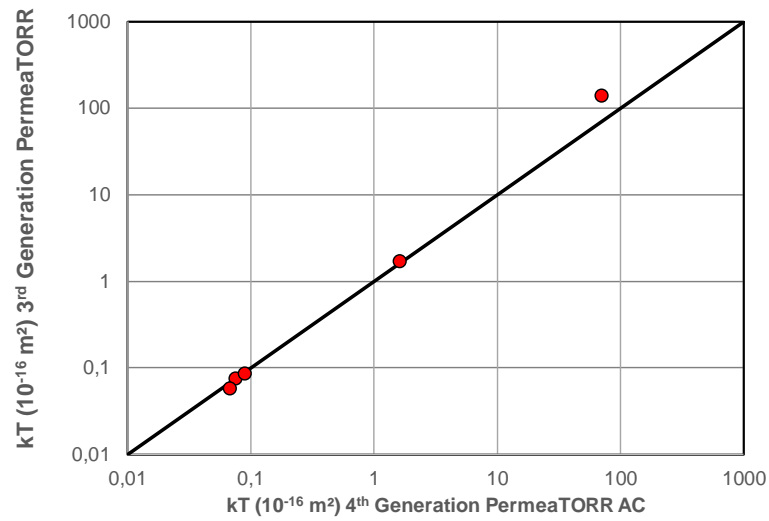


Fig. 7 – Comparison of air-permeability kT, measured with both instruments

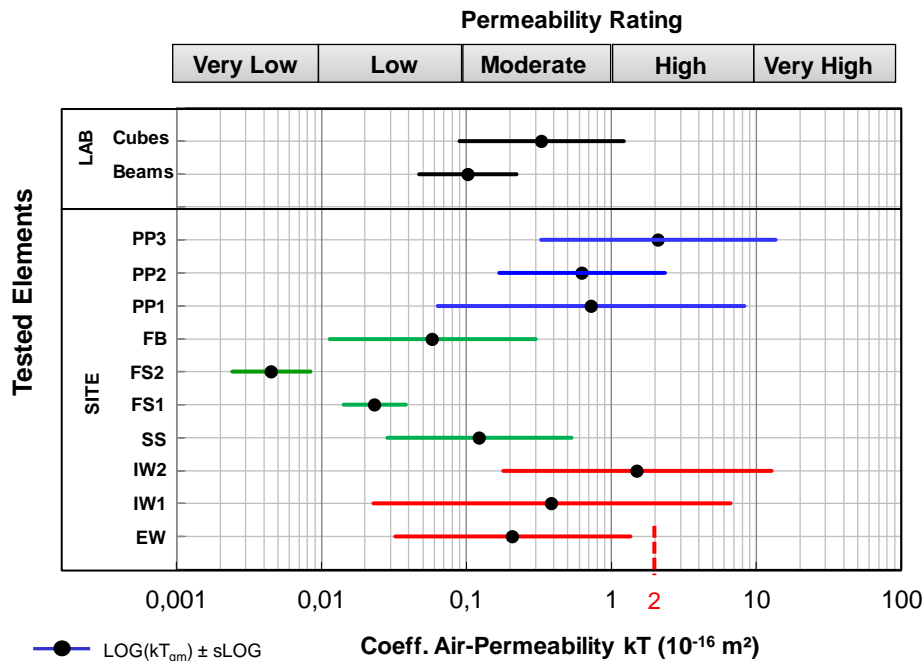


Fig. 8 – Summary of test results obtained on site (bottom) and in the laboratory (top)

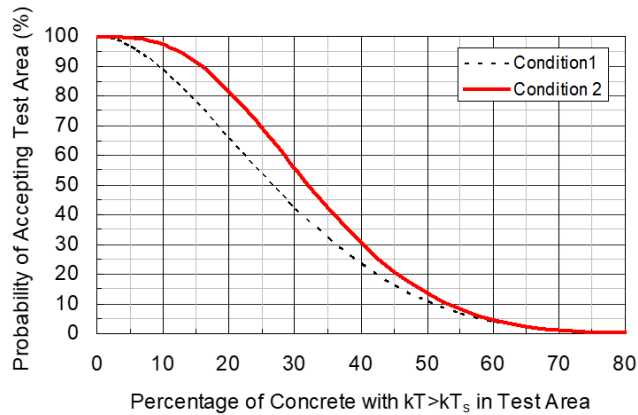


Fig. 9 – O-C Curve of the compliance criterion of Swiss Standard SIA 262/1:2013 for site air-permeability