

Current Topics and Trends on Durability of Building Materials and Components

Carles Serrat, Joan Ramon Casas and Vicente Gibert (Eds.)



Current Topics and Trends on Durability of Building Materials and Components

Proceedings of the XV edition of the International Conference on Durability of Building Materials and Components (DBMC 2020)

Barcelona, Spain

20 – 23 October 2020

Edited by

Carles Serrat

Dept. of Mathematics

Joan Ramon Casas

Dept. of Civil and Environmental Engineering

Vicente Gibert

Dept. of Architectural Technology

Universitat Politècnica de Catalunya-BarcelonaTECH, Catalonia, Spain

A publication of:

**International Center for Numerical
Methods in Engineering (CIMNE)**

Barcelona, Spain

CIMNE 

Current Topics and Trends on Durability of Building Materials and Components

Carles Serrat, Joan Ramon Casas and Vicente Gibert (Eds.)

First edition, October 2020

© The authors

ISBN: 978-84-121101-8-0

Cover: Basilica of the Sagrada Família. Spiral staircase inside the Nativity towers.
Photo (c) Pere Vivas. Triangle Books. Sagrada Família.

Printed by: Artes Gráficas Torres S.L., Huelva 9, 08940 Cornellà de Llobregat, Spain

ORGANIZERS AND COMMITTEES

ORGANIZING COMMITTEE

Carles Serrat i Piè

Chair

Department of Mathematics

EPSEB, Barcelona, Spain

Joan Ramon Casas i Rius

Department of Civil and Environmental Engineering

ETSECCPB, Barcelona, Spain

Vicente Gibert i Armengol

Department of Architectural Technology

ETSAB, Barcelona, Spain

STEERING COMMITTEE

Organizing Members

- Geert De Schutter, RILEM (Chair)
- Jennifer Keegan, ASTM
- Jorge De Brito, CIB
- Christopher C. White, NIST
- Michael Lacasse, NRC-CRC

Members at Large

- Robert Amor, The University of Auckland, New Zealand
- Carmen Andrade, CIMNE, Spain
- Christian Brischke, University of Göttingen, Germany
- Bruno Daniotti, Politecnico de Milano, Italy
- Vasco Peixoto De Freitas, FEUP, Portugal
- Peter Flüeler, m ETH/EMPA, Switzerland
- Dariusz Gawin, University of Lodz, Poland
- Julien Hans, CSTB, France
- Vanderley John, USP, Brazil
- Chun-Qing Li, RMIT University, Australia
- Isabel María Martínez, IETec-CSIC, Spain
- Hiroyuki Miyauchi, BRI, Japan
- Shiro Nakajima, Utsunomiya University, Japan
- Carles Serrat, Universitat Politècnica de Catalunya-BarcelonaTECH, Spain
- Kiang Hwee Tan, NUS, Singapore
- Nil Turkeri, ITU, Turkey

UPC INSTITUTIONAL COMMITTEE

- Francesc Torres (Chair), President of UPC-BarcelonaTECH
- Jordi Berenguer, Vice-rector for Knowledge Transfer and Innovation of UPC-BarcelonaTECH
- Inmaculada Rodríguez, Dean of Barcelona School of Building Construction (EPSEB)
- Pedro Díez, Dean of Barcelona School of Civil Engineering (ETSECCPB)
- Félix Solaguren-Beascoa, Dean of Barcelona School of Architecture (ETSAB)
- Albert Cuchi, Dean of Vallès School of Architecture (ETSAV)
- Eugenio Oñate, Chair of Executive Council of the International Center for Numerical Methods in Engineering (CIMNE)
- Carles Serrat, Chair of the DBMC 2020 Conference

SCIENTIFIC COMMITTEE

Chairs

- Joan Ramon Casas (Co-Chair), UPC-Barcelona TECH, Spain
- Carmen Andrade (Co-Chair), CIMNE, Spain

Vice-Chairs

- Antonio Aguado, UPC-Barcelona TECH, Spain
- Túlio Bittencourt, University of São Paulo, Brazil
- Nele De Belie, University of Ghent, Belgium
- Ravindra Gettu, IIT Madras, India
- Rade Hajdin, IMC GmbH, Zürich & Belgrade Univ.
- Michael Lacasse, NRC Construction Research Centre, Canada
- Fernanda Rodrigues, Universidade de Aveiro, Portugal
- Elisabetta Rosina, Politecnico di Milano, Italy
- Ana Silva, IST, Lisbon, Portugal
- Alfred Strauss, BOKU, Vienna, Austria

Members

- Bijan Adl-Zarrabi, Chalmers University of Technology, Sweden
- Mark Ahrens, University Bochum, Germany
- Ahu Aydogan, City College of New York, USA
- Diana Bajare, Riga Technical University, Latvia
- Véronique Baroghel-Bouny, IFSTTAR, France
- Pablo Daniel Benítez-Mongelós, National University of Itapúa, Paraguay
- Umberto Berardi, Ryerson University, Canada
- Susan A. Bernal, University of Leeds, Leeds, UK
- Hans Beushausen, UCT, South-Africa
- Tomasz Blaszczyński, Poznan University of Technology, Poland
- Violeta Bokan-Bosiljkov, U. Ljubljana, Slovenia
- Mark Bomberg, Syracuse University, NY, USA
- Alessandra Bonazza, CNR, Italy
- Anatolijs Borodinecs, Riga Technical University, Latvia
- Lars Boström, SP, Sweden
- Kathryn Bourke, Whole Life Ltd, Watford, UK
- Thomas Braml, Bundeswehr University Munich, Germany
- Christian Brischke, University of Goettingen, Germany
- Zeynep Basaran Bundur, Özyegin University, Istanbul, Turkey
- Stefan Burtscher, TU Wien, burtscher consulting GmbH, Austria
- Guido Camata, University G. D'Annunzio, Chieti Pescara, Italy
- Jan Carmeliet, ETH Zürich, Switzerland
- Diana Car-Pušić, University of Rijeka, Croatia
- Robby Caspeele, University of Ghent, Belgium
- Anna Cellmer, Koszalin University of Technology, Poland
- Michael Chew, National University of Singapore, Singapore
- Sheila M.A. Conejos, School of Science and Technology, Singapore University of Social Sciences, Singapore
- Anca Constantin, Ovidius University of Constanta, Romania
- Bart Craeye, University of Antwerp, Belgium
- Paulo Cruz, University of Minho, Portugal
- Meri Cvetkovska, Ss. Cyril and Methodius University in Skopje, Republic of Macedonia
- Martin Cyr, INSA Toulouse, France
- Bruno Daniotti, Politecnico di Milano, Italy
- Jorge De Brito, Instituto Superior Tecnico, Technical University of Lisbon, Portugal
- Gianmarco De Felice, Università degli Studi Roma Tre, Italy
- Vasco Peixoto De Freitas, U. Porto, Portugal
- Dominique Derome, EMPA, Switzerland

- Josée Duchesne, Université Laval, Quebec, Canada
- Vilma Ducman, Slovenian National Building and Civil Engineering Institute, Slovenia
- Miren Etxeberria, UPC-BarcelonaTECH, Spain
- Flora Faleschini, Università degli Studi di Padova, Italy
- Ines Flores-Colen, Instituto Superior Técnico, University of Lisbon, Portugal
- David Garcia, UPC-BarcelonaTECH, Spain
- Dariusz Gawin, Lodz University of Technology, Poland
- Hua Ge, Concordia University, Montreal, Canada
- Jennifer Gerbi, U.S. Department of Energy, USA
- Michel Ghosn, City College New York, USA
- José Manuel Gómez Soberón, UPC-BarcelonaTECH, Spain
- Klodian Gradeci, SINTEF Building and Infrastructure, Trondheim, Norway
- Elke Gruyaert, KU Leuven, Belgium
- Lars Gullbrekken, SINTEF Building and Infrastructure, Trondheim, Norway
- Guillaume Habert, ETH Zürich, Switzerland
- Carl-Eric Hagendoft, Chalmers University of Technology, Sweden
- Tomáš Hanák, Brno University of Technology, Czech Republic
- Michael Hansen, TU Hannover, Germany
- Laia Haurie, UPC-BarcelonaTECH, Spain
- Shuichi Hokoi, Kyoto University, Japan
- Vít Hromádka, Brno University of Technology, Czech Republic
- Aletheia Ida, University of Arizona, USA
- Simo Ilomets, Tallinn University of Technology, Estonia
- Kei-Ichi Imamoto, Tokyo University of Science, Japan
- Joanna Janicka, University of Warmia and Mazury in Olsztyn, Poland
- Hans Janssen, KU Leuven, Belgium
- Pär Johansson, Chalmers University of Technology, Göteborg, Sweden
- Harald Justnes, SINTEF, Norway
- Targo Kalamees, Tallinn University of Technology, Estonia
- Mohammad Arif Kamal, Aligarh Muslim University, India
- Janis Kaminskis, Riga Technical University, Latvia
- Amnon Katz, Technion, Haifa, Israel
- Jacek Katzer, Koszalin University of Technology, Poland
- Miroslav Komljenovic, University of Belgrade, Serbia
- Kinga Korniejeko, Cracow University of Technology, Poland
- Jana Korytářová, Brno University of Technology, Czech Republic
- Jarek Kurnitski, Tallinn University of Technology, Estonia
- Joao Labrincha, University of Aveiro, Portugal
- Roman Lackner, UIBK, Innsbruck, Austria
- Akos Lakatos, University of Debrecen, Hungary
- Paulo Laurenço, University of Minho, Portugal
- Elizabeth Laycock, Sheffield Hallam University, UK
- Agnieszka Lesniak, Cracow University of Technology, Poland
- Mae-Ling Lokko, Rensselaer Polytechnic Institute, USA
- Barbara Lothenbach, EMPA, Dübendorf, Switzerland
- Zoubir Lounis, National Research Council Canada, Canada
- Lyuben Lyubenov, University of Structural Engineering & Architecture, Bulgaria
- Ana Mandić Ivanković, University of Zagreb, Croatia
- Mihajlo Marković, University of Banja Luka, Bosnia and Herzegovina
- Ivan Marović, University of Rijeka, Croatia
- Isabel Milagre Martins, LNEC, Portugal
- Berardo Matalucci, SHoP Architects, USA
- Jose Matos, University of Minho, Portugal
- José António Raimundo Mendes da Silva, Universidade de Coimbra, Portugal
- Esperanza Menéndez Méndez, Institute of Construction Science Eduardo Torroja (CSIC), Spain
- José Filipe Miranda-Melo, University of Porto, Portugal
- Eva Møller, Technical University of Denmark

- Sergio Montelpare, University G. D'Annunzio, Chieti Pescara, Italy
- Travis Moore, National Research Council Canada, Ottawa, Canada
- Martin Morelli, Aalborg University, Copenhagen, Denmark
- Vahid Nik, Lund University, Sweden
- Maria Nogal, Delft University of Technology, the Netherlands
- Takafumi Noguchi, University of Tokyo, Japan
- Ehsan Noroozinejad, Graduate University of Advanced Technology, Iran
- Daniel Oliveira, University of Minho, Portugal
- Fernando Pacheco Torgal, University of Minho, Portugal
- Ainars Paeglitis, Riga Technical University, Latvia
- Cedric Patapy, Laboratoire Matériaux et Durabilité des Constructions – INSA Toulouse/UPS, France
- Marco Perino, Politecnico di Torino, Italy
- Ruut Peuhkuri, Aalborg University, Copenhagen, Denmark
- Edyta Plebankiewicz, Cracow University of Technology, Poland
- Gul Polat, Istanbul Technical University, Turkey
- Ioana Popescu, IHE Delft Institute for Water Education, the Netherlands
- Andres J. Prieto, Universidad Austral de Chile, Valdivia, Chile
- John Provis, University of Sheffield, UK
- Elzbieta Radziszewska-Zielina, Cracow University of Technology, Poland
- Laura Rampazzi, University of Insubria, Italy
- Nuno Ramos, FEUP, University of Porto, Portugal
- Jacek Rapinski, University of Warmia and Mazury in Olsztyn, Poland
- Marzieh Riahinezhad, National Research Council Canada, Ottawa, Canada
- Pere Roca, UPC-BarcelonaTECH, Spain
- Hugo Rodrigues, Polytechnic of Leiria, Portugal
- Staf Roels, KU Leuven, Belgium
- Petra Rütther, SINTEF Building and Infrastructure, Trondheim, Norway
- Hiroaki Saito, Ashikaga University, Japan
- Antonio Sansonetti, CNR, Italy
- Amaia Santamaría, Universidad del País Vasco, Bilbao, Spain
- Mats Santamouris, University of Athens, Greece
- Karma Sawyer, U.S. Department of Energy, USA
- Erik Schlangen, TU Delft, the Netherlands
- Lina Seduikyte, Kaunas University of Technologies, Lithuania
- Dmitrijs Serdjusks, Riga Technical University, Latvia
- Igal M. Shohet, Ben-Gurion University of Negev, Israel
- Carey Simonson, University of Saskatchewan, Canada
- Gintautas Skripkiunas, Vilnius Gediminas Technical University, Lithuania
- Mohamed Sonebi, Queens University, Belfast, UK
- Wil Srubar, University of Colorado Boulder, USA
- Sudip Talukdar, British Columbia Institute of Technology, Burnaby, Canada
- Kiang Hwee Tan, National University of Singapore, Singapore
- Luping Tang, Chalmers University of Technology, Sweden
- Fitsum Tariku, British Columbia Institute of Technology, Burnaby, Canada
- Nicola Tarque, Pontificia Universidad Católica del Perú, Perú
- Akos Torok, Budapest University of Technology and Economics, Hungary
- Milan Trivunic, University of Novi Sad, Serbia
- Nil Türkeri, Istanbul Techn Univ, Turkey
- Maria Rosa Valluzzi, University of Padova, Italy
- Joris Van Acker, UGent, Belgium
- Keith Van de Riet, University of Kansas, USA
- Nathan Van Den Bossche, Ghent University, Belgium
- Philip Van Den Heede, Ghent University, Belgium
- Humberto Varum, University of Porto, Porto, Portugal
- Marius Vendrell, University of Barcelona, Spain
- Anne Ventura, IFSTTAR, France
- Yury Villagran, LEMIT, La Plata, Argentina

- Martins Vilnitis, Riga Technical University, Latvia
- Eva Vitkova, Brno University of Technology, Czech Republic
- Jeroen Vrijders, Belgian Building Research Institute, Belgium
- Johan Vyncke, Belgian Building Research Institute, Belgium
- Lin Wang, Concordia University, Montreal, Canada
- John A. Wells, Crosier Kilgour and Partners Ltd., Winnipeg, Canada
- Guang Ye, TU Delft, the Netherlands
- Joan Lluís Zamora, UPC-BarcelonaTECH, Spain
- Mariano Angelo Zanini, Università degli Studi di Padova, Italy
- Cristina Zanotti, University of British Columbia, Canada
- John Zhai, University of Colorado Boulder, USA
- Xiaohai Zhou, EMPA, Switzerland
- Valentina Žileska-Pancovska, Ss. Cyril and Methodius University in Skopje, Republic of Macedonia

LOCAL ORGANIZING COMMITTEE

Chairs

- Vicente Gibert, UPC-BarcelonaTECH, Spain

Members

- Cindy Abbott-Brito
- Ronny S. Guarderas-Luna
- Laia Haurie, EPSEB
- Beatriz D. Médola
- Climent Molins, ETSECCPB
- Joan Moreno, ETSAB
- Ana-Belén Onecha, ETSAB
- Javier E. Peñuelas
- Verónica Royano
- Alejandra Valencia-Arboleda

Durability Studies of Polyurethane-Based Structural Adhesives Used in Engineered Wood Products in New Zealand.....	1353
<i>Catherine L. Nicholson</i>	
Effect of Carbonation in Mortars with Different Types of Metakaolin and Curing Procedures.....	1361
<i>Helena Carasek, Mônica E. Jungblut, Paulo M. Passos and Oswaldo Cascudo</i>	
Effect of Cement Type and Micro-cracks on Chloride Penetration in Concrete	1369
<i>Nicoletta Russo, Matteo Gastaldi, Luca Schiavi, Alberto Strini, Riccardo Zanoni and Federica Lollini</i>	
Effect of Coexisting Materials on Secondary Ettringite Formation.....	1377
<i>Kennosuke Sato, Tsuyoshi Saito and Tatsuhiko Saeki</i>	
Effect of Crack Repair by Bio-Based Materials Using Alginate and Bacillus Subtilis under Wet and Dry Environment Part-I.....	1385
<i>Keiyu Kawaai, Takahiro Nishida and Atsushi Saito</i>	
Effect of Internal Hydrophobization on the Properties of Porous, Cementitious Materials	1393
<i>Kalina B. Grabowska and Marcin Koniorczyk</i>	
Effect of the Type of Concrete with Mineral Additions on the Reinforcement Corrosion Induced by Chlorides - Analysis in the Same Mechanical Strength Class	1401
<i>Andrielli Moraes de Oliveira, Oswaldo Cascudo and Alexandre de Castro</i>	
Evaluation of the Effects of Environmental Exposure on the Performance Decay of ETICS.....	1409
<i>Maurizio Nicoletta, Roberto Landolfi and Alessio Pino</i>	
Experimental Study on Carbonation Resistance and Water Absorbing Property of Concrete Crack with repair	1417
<i>Naoko Tsuchiya and Kaori Nemoto</i>	
Gold Leaf Murano Glass Piastras' Performance in the Trencadís Catalan Modernism Mosaic: Recognition of Primary Alteration Patterns	1425
<i>Héctor Y. Orozco Camargo and Joan Ll. Zamora i Mestre</i>	
How to Determine when a New Building Product is Suitable - Certifications and Experience	1433
<i>Ernst J. de Place Hansen, ørgen Nielsen, Eva B. Møller and Ruut H. Peuhkuri</i>	
Impact of Portland Cement Content on Alkali Activated Bottom Ash	1441
<i>Luis Tambara Júnior, Malik Cheriaf and Janaide C. Rocha</i>	
Influence of Different Types of Metakaolin on Compressive Strength and Chloride Migration of Concrete.....	1449
<i>Rodrigo Teodoro, Helena Carasek and Oswaldo Cascudo</i>	
Influence of Drying on Accelerated Carbonation Testing of Concrete	1457
<i>Jean Louis Gallias, Bruno Fiorio, Yunyun Tong and Mehdi Benaissa</i>	

Effect of Cement Type and Micro-cracks on Chloride Penetration in Concrete

Nicoletta Russo¹, Matteo Gastaldi¹, Luca Schiavi², Alberto Strini², Riccardo Zanoni² and Federica Lollini¹

¹ Politecnico di Milano, Department of Chemistry, Materials and Chemical Engineering
“Giulio Natta”, Piazza Leonardo da Vinci 32, 20133 Milano, Italy, nicoletta.russo@polimi.it
matteo.gastaldi@polimi.it federica.lollini@polimi.it

² Consiglio Nazionale delle Ricerche, Istituto per le Tecnologie della Costruzione,
Viale Lombardia 49, 20098 San Giuliano Milanese, Italy, luca.schiavi@itc.cnr.it
alberto.strini@itc.cnr.it riccardo.zanoni@itc.cnr.it

Abstract. Chloride-induced corrosion of reinforcing steel rebar is one of the major durability issues affecting reinforced concrete structures (RC). Various models have been developed to assess the durability design with regard to corrosion prevention in chloride-bearing environments, which refer mainly to uncracked concrete. Cracks, however, are frequently present in real RC structures and accelerate corrosion initiation of steel reinforcement, resulting in a shortened service life. This paper presents preliminary results concerning chloride-penetration resistance of different types of uncracked and cracked concrete, made with Ordinary Portland (OPC), Portland-Limestone (PLC) and Pozzolanic cement (PC) and a water/cement ratio of 0.45. Load-induced micro-cracks were obtained with a specifically developed technique. Cracked and uncracked concrete specimens were immersed in a sodium chloride solution for 32 and 90 days. The chloride penetration front was detected on split surfaces, perpendicular to the exposed surface, with a colorimetric technique to evaluate the combined effect of cracks and cement type on the chloride-penetration resistance of different concretes. Results showed that in uncracked conditions cement type strongly affected chloride penetration depth in concrete. A mathematical model was applied to evaluate chloride diffusion coefficient (D) from chloride penetration depth measurements and exposure time. The lowest value of D was found for PC concrete, that can be attributed to a higher pore refinement in the cement paste, five times higher for OPC and nine times higher for PLC. In cracked conditions, an additional penetration of chlorides occurred in correspondence of crack, even for micro-cracks 10-50 μm wide and 8-30 mm deep, leading to a decrease in chloride penetration resistance. The model however did not provide for an estimation of D in correspondence of the crack.

Keywords: Reinforced Concrete Durability, Cracked Concrete, Chloride Penetration Resistance.

1 Introduction

Reinforced Concrete (RC) is one of the most widely used construction materials for the realization of modern structures and architectures. The considerable efforts made in the recent past to understand the degradation processes affecting RC constructions led to the development of useful tools and design models aimed at preventing corrosion of steel reinforcement rebar, which is the main cause of premature failure of RC structures (Bertolini *et al.*, 2004). These tools and models require several durability-related design parameters, among which the chloride penetration resistance of concrete is of particular relevance for the evaluation of the service life of a RC structure in chloride-contaminated environment.

Several studies have been carried out to investigate the main influencing factors of chloride penetration resistance of concrete, such as, for instance, the cement type. However, these studies - as well as current durability design models - often refer to uncracked concrete, a condition that is rarely met in real RC structures. Cracks in the concrete cover represent a privileged path for chlorides and it is therefore of fundamental importance to evaluate the effects of cracks on chloride penetration resistance of concrete (ACI 201.2R-16, 2016).

In recent years, an ever increasing number of studies has been addressed to this topic (Gu *et al.*, 2015) and, as a general result, it seems that even micro-cracks (crack opening smaller than 100 μm) can locally affect chloride penetration in concrete (Yoon and Schlangen, 2014). In some tests the chloride penetration resistance is evaluated by means the so called colorimetric method. One of the advantages in applying this method to cracked concrete is that it provides a visual detection of chloride penetration in correspondence and in the vicinity of crack. In literature, this method has often been applied to concrete specimens with wide artificial cracks (notches) subject to accelerated exposure test (Audenaert *et al.*, 2007, Marsavina *et al.*, 2009, Li *et al.*, 2016). Few studies, however, have been addressed to the application of colorimetric technique on cracked specimens subject to natural exposure conditions.

In this study, preliminary results are presented within a wider research project concerning the effects of cracks on RC durability. The chloride penetration resistance of three different types of concrete, obtained with water/cement ratio of 0.45 and different cements, was evaluated in uncracked and load-induced micro-cracked configurations. After the immersion of the concrete specimens in NaCl solution for 32 and 90 days, the chloride penetration was evaluated via colorimetric technique, and was correlated with crack geometrical parameters.

2 Experimental Procedure

2.1 Materials and Specimens

Concrete specimens were realized with three different mixes, considering three different types of cement. Details on concrete mixing proportions, and properties at fresh and hardened state are reported in Table 1.

Table 1. Concrete mixing proportions and properties.

	OPC	PLC	PC
Cement, kg/m^3	422	422	422
Water, kg/m^3	190	190	190
Aggregate, kg/m^3	1731	1731	1731
w/c	0.45	0.45	0.45
Superplasticizer, mL	15.5	10	12
Slump, mm	130	170	165
Density, kg/m^3	2496	2526	2477
$f_{c,\text{cube},7\text{days}}$, MPa	54.0	56.9	54.6
$f_{c,\text{cube},28\text{days}}$, MPa	76.9	60.8	67.4
$f_{c,\text{cube},120\text{days}}$, MPa	86.9	76.8	81.4

It was considered an Ordinary Portland Cement (OPC) type CEM I 42,5R as reference, a Portland-Limestone Cement (PLC) type CEM II/A-LL 42,5R, which is one of the most widely used in Italy, and a cement with pozzolanic additions, Pozzolan Cement (PC) type CEM IV/A(V) 42,5R-SR. The concrete mixes were obtained with 422 kg/m³ of cement and 190 kg/m³ of water (w/c ratio equal to 0.45), and 1731 kg/m³ of limestone aggregates with maximum diameter of 9 mm. To improve workability at fresh state, an acrylic-based superplasticizer was added to each mix. For each concrete type, six cubic specimens 100 mm side were cast for compressive strength, which was executed after 7, 28 and 120 days of moist curing on two specimens per time. For chloride penetration resistance six prismatic specimens of dimensions 120×90×50 mm were manufactured for each concrete type. To promote the formation of the crack during the cracking procedure, four prismatic specimens were provided with a central V-shaped notch, about 5 mm deep, along the longitudinal direction on the casting surface. After casting, all concrete specimens were covered with a plastic film. The subsequent day were demoulded and placed in the curing chamber (four of them after the cracking procedure), where they were kept at 20°C and RH>90% for 28 days. Table 1 shows the average concrete properties at hardened state. An increase of compressive strength in time was observed, with compressive strengths of 77, 61 and 68 MPa reached respectively by OPC, PLC and PC concretes after 28 days of moist curing.

2.2 Cracking Procedure

A mechanical loading procedure was developed in order to induce cracks on the casting surface of specimens. A universal testing machine was used to reproduce a sort of tree-point bending test, as shown in Figure 1. The procedure was executed 24 hours after casting, on specimens presenting the longitudinal notch, for details see (Russo *et al.*, 2019). At the end of the cracking procedure the specimens were placed in the curing chamber.

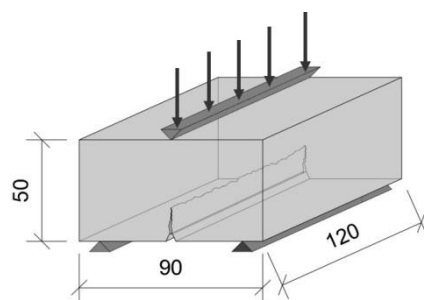


Figure 1. Specimen geometry (dimensions in mm) and cracking procedure.

2.3 Chloride Penetration Resistance

Uncracked and cracked concrete specimens were exposed to chlorides by immersion (EN 12390-11:2005). After 28 days of curing the specimens were vacuum saturated with demineralized water. At the end of the saturation procedure they were left immersed in water and within 24 hours removed from water in order to seal with epoxy resin all the surfaces, except for the casting surface. After 24 hours the specimens were immersed in a saturated solution of calcium hydroxide for 18 hours. Finally, all the specimens were immersed in a 3%

by mass sodium chloride solution, for 32 and 90 days (concrete will be henceforth identified with a code indicating the cement type and the days of exposure, *e.g.* OPC-90 for specimens obtained with Ordinary Portland Cement and exposed to chlorides for 90 days). At the end of the exposure time, the specimens were split with a hydraulic press in one point along the longitudinal direction, and therefore perpendicular to the crack plane for cracked specimens.

On the freshly split surfaces a silver nitrate solution (0.1 M) was sprayed, in order to evaluate the chloride penetration profile. The chloride penetration depth was measured in seven different positions, *i.e.* in the central point and at a distance of 10 mm, 20 mm and 30 mm on each side. For cracked specimens, the central measure was done starting from the tip of the notch, in order to exclude its influence on the penetration profile. A further measure was also done for cracked specimens, corresponding to the maximum penetration depth starting from the tip of the notch. For each concrete type, two cracked specimens were provided for each exposure time, while the same two uncracked specimens were used for both the exposure times. The fracture surfaces of the uncracked specimens analyzed after 32 days of exposure were sealed with epoxy resin, and the day after were exposed again to chlorides, in order to be analyzed also after 90 days of exposure. After chloride penetration measurements the split surface was impregnated with a colored superfluid two-component epoxy resin. The following day, a thin concrete slice, parallel to the split surface where chloride penetration depth was evaluated, was cut with a water cooled cutting saw. The concrete thin slice was then polished and observed at the stereoscopic microscope in order to detect the two main crack geometrical parameters, crack width and crack depth.

3 Results and Discussion

3.1 Crack Geometrical Parameters

Figure 2a reports, as an example, a wide field image of a cracked PC-90 specimen, obtained combining three different images at 6 \times of magnification. Wide field observation was done in order to detect the main path of the crack and to identify crack tip. The parameter crack depth was then measured with a caliper, as the distance between the notch tip and the crack tip.

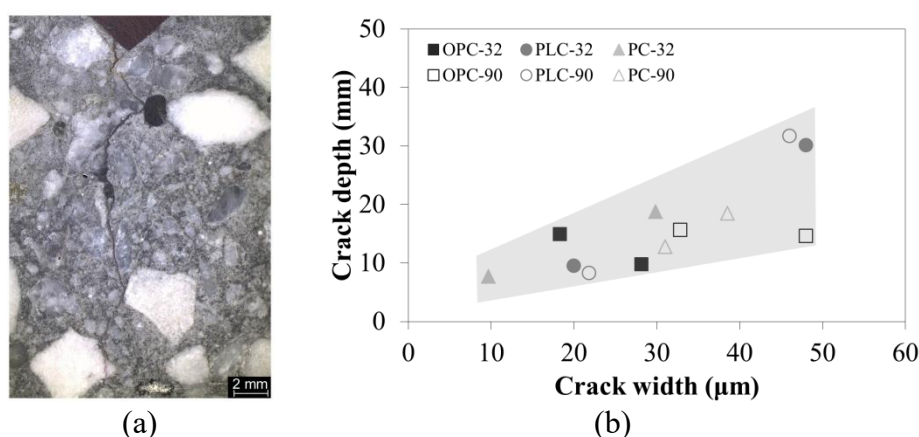


Figure 2. (a) Microscopic image of cracked PC-90 specimen; (b) Crack width as a function of crack depth.


The parameter crack width is intended as the crack opening at the exposed surface, in correspondence of the tip of the notch. Five measurements were done at 50 \times of magnification, in a range of about one millimeter from notch tip, and then averaged. Figure 2b reports the results obtained for the two replicated samples of the three concrete types after the two exposure times. Crack widths resulted to be included in the range 10-50 μm , while crack depth included in the range 8-30 mm. Despite data were characterized by a quite high dispersion, increasing crack width an increase also in crack depth was observed, which was independent from the cement type and the exposure time.

3.2 Chloride Penetration Resistance


A colorimetric technique was used to evaluate the chloride penetration profiles on the split surfaces of different cracked and uncracked concretes. Figure 3a and 3c show, as an example, the chloride penetration profile in PLC uncracked and cracked specimens respectively, after 32 days of exposure. The penetration depths in different points after 32 days of exposure for the three cement types are reported in Figure 3b for sound and 3d for cracked configuration.




(a)

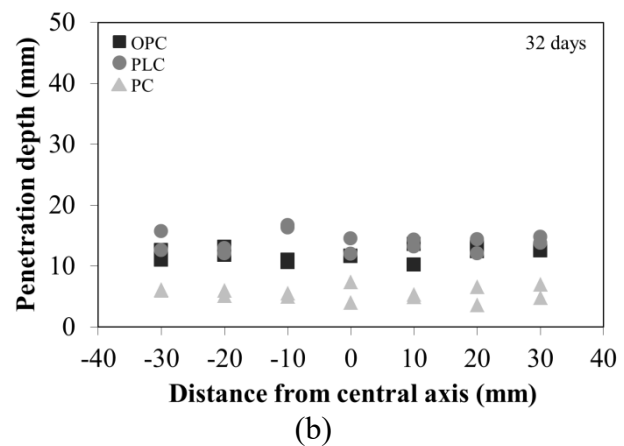

(b)

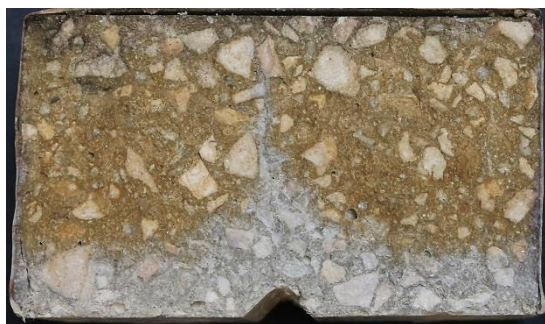

(c)

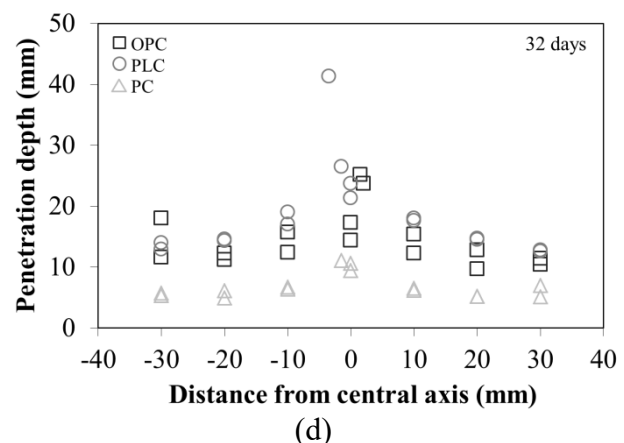

(d)

Figure 3. Chloride penetration in PLC-32 (a) uncracked and (c) cracked specimen; Chloride penetration depth measured in different points at different distances from the central axis of the specimen for different concrete types in (b) uncracked and (d) cracked specimens after 32 days of exposure.

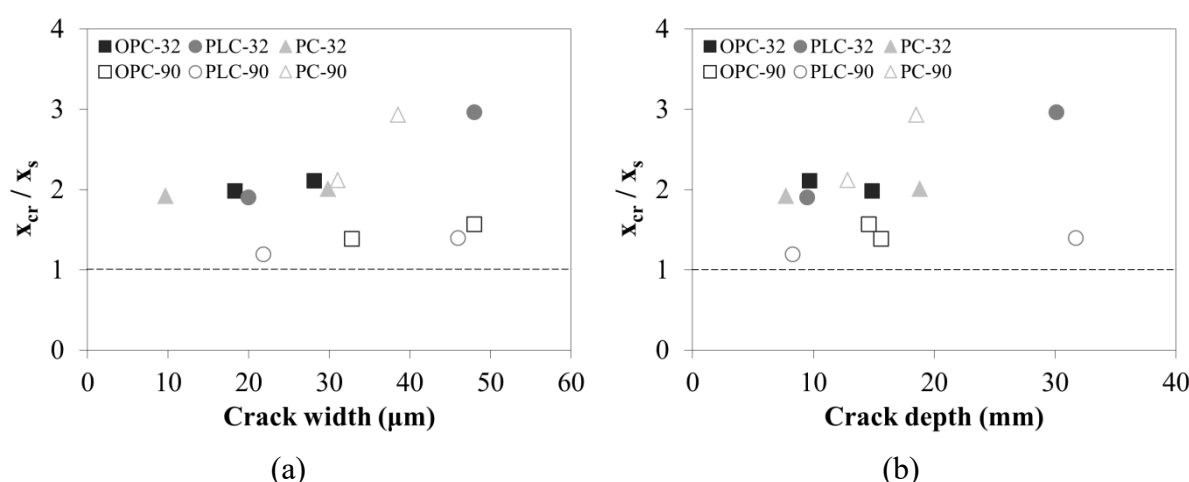


Figure 4. Local increase of chloride penetration depth in correspondence of the crack with respect to sound conditions, as a function of (a) crack width and (b) crack depth.

In Figure 3b it can be observed that, in sound conditions and for each type of concrete, the penetration depth was almost constant along the specimen and comparable between the two replicate specimens. As expected the lowest chloride penetration profiles were referred to the PC cement type, showing a chloride penetration depth of about 5 mm after 32 days of exposure. This can be attributed to a higher pore refinement in the cement paste, and therefore a higher chloride penetration resistance of this concrete type. On the other hand, despite the results of compressive strength, OPC and PLC resulted to have similar chloride penetration depths, of about 10 to 15 mm after 32 days of exposure. The same trend of penetration profile was detected on cracked specimens, except for the measurements carried out in the vicinity of the central axis, where penetration profiles were clearly altered by the presence of the crack (in this point the measurements were done starting from the tip of the notch).

In order to account for the influence of crack geometrical parameters, in Figure 4 is shown the local increase in chloride penetration depth in correspondence of the crack with respect to sound conditions (x_{cr}/x_s) as a function of crack width and crack depth for both the exposure time. x_{cr}/x_s represents the ratio between the chloride penetration depth in the crack and the average penetration depth in sound specimens. It can be observed that chloride penetration in the crack resulted always higher with respect to uncracked conditions, until a maximum of 3 times higher. The local increase of penetration depth in the crack after 32 days of exposure resulted always doubled for crack widths included in the range 10-30 μm and crack depth about 10-20 mm, independently from the concrete type, indicating that micro-cracks could lead to a significant increase of the chloride penetration. After 90 days of exposure, for PC concrete the local increment in correspondence of crack was still similar, while for OPC and PLC a lower local increment was detected, included in the range 1.2-1.5, although crack parameters were comparable to those at 32 days of exposure. This effect will be further investigated to understand if it is due to some self-healing effects, or simply to data scattering.

From the measurements of penetration depths, an attempt was made in order to evaluate chloride penetration resistance of the different concretes in terms of chloride diffusion coefficient. The diffusion coefficient was calculated considering a linear correlation between

the chloride penetration depth and the square root of time, according to the relationship proposed by Collepardi *et al.*, 1970:

$$x = 4\sqrt{Dt} \quad (1)$$

where x is the chloride penetration depth, t is time and D is the chloride diffusion coefficient of concrete.

Figure 5 shows the relationship between the chloride penetration depths for different concretes and the square root of time. It seems that for all cement types in uncracked conditions there is a general decrease in the chloride penetration rate over time (i.e. ageing effect), which has already been detected (Collepardi and Biagini, 1989), although for longer exposure times with respect to those considered in this study. Anyway, a single linear interpolation was done for each type of concrete, and the values of the diffusion coefficient are reported in the chart legend. The highest chloride penetration resistance was detected for the PC concrete, whose chloride diffusion coefficient resulted equal to $0.34 \times 10^{-12} \text{ m}^2/\text{s}$, while D was more than 5 times higher for OPC concrete ($1.79 \times 10^{-12} \text{ m}^2/\text{s}$) and nine times higher for PLC ($3.06 \times 10^{-12} \text{ m}^2/\text{s}$), consistent with literature data (Collepardi and Biagini, 1989). The determination of the diffusion coefficient from the correlation (1) in the case of cracked configurations resulted to have some limitations, not only because of the ageing effect but also because of crack geometrical parameters, which were different in correspondence of different measurement surfaces. For PC the linear correlation was still able to fit results, and the value of the diffusion coefficient in the crack resulted to be equal to $1.82 \times 10^{-12} \text{ m}^2/\text{s}$, more than five times higher than the value measured in uncracked conditions. Conversely, for OPC and PLC cement types, a linear correlation, in correspondence to the crack, could not be detected. This is a direct consequence of the effect previously detected, i.e. OPC and PLC showed lower local increase in chloride penetration depths independently from crack parameters at 90 days of exposure.

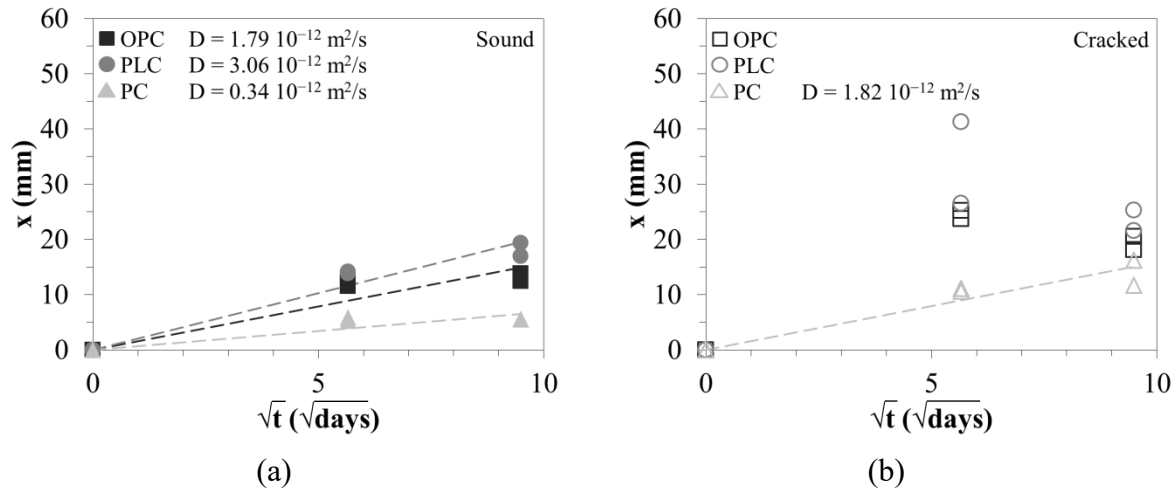


Figure 5. Chloride penetration depths as a function of the square root of time for the different concretes in (a) sound and (b) cracked conditions.

4 Conclusions

Chloride penetration in concretes made with Ordinary Portland (OPC), Portland-Limestone (PLC) and Pozzolanitic (PC) cement was investigated through a colorimetric technique in uncracked and cracked configurations. Cracked specimens were obtained with a sort of three-point bending procedure able to generate V-shaped micro-cracks, with crack opening included in the range 10-50 μm and crack depth included in the range 8-30 mm. In uncracked configuration, PC was the concrete type showing lowest chloride penetration depths, due to a higher pore refinement. In cracked configuration the chloride additional penetration in the crack (x_{cr}/x_s) was evaluated as a function of two main geometrical parameters, crack width and crack depth. Independently from the concrete type, x_{cr}/x_s was always included in the range 1.2-3. Chloride penetration resistance of different uncracked and cracked concretes was investigated also in terms of chloride diffusion coefficient (D). In uncracked conditions D resulted to be equal to $1.79 \times 10^{-12} \text{ m}^2/\text{s}$ for OPC, $3.06 \times 10^{-12} \text{ m}^2/\text{s}$ for PLC and $0.34 \times 10^{-12} \text{ m}^2/\text{s}$ for PC concrete. The application of the same mathematical model to cracked concrete resulted limited by the fact that crack geometrical parameters were not considered.

ORCID

Nicoletta Russo: <https://orcid.org/0000-0003-3919-0094>

Matteo Gastaldi: <https://orcid.org/0000-0002-1392-2691>

Luca Schiavi: <http://orcid.org/0000-0001-5574-1584>

Alberto Strini: <http://orcid.org/0000-0001-9585-2748>

Federica Lollini: <http://orcid.org/0000-0002-8706-7915>

References


- ACI Committee 201, (2016). *ACI 201.2R-16 Guide to Durable Concrete*. American Concrete Institute.
- Audenaert, K., De Schutter, G. and Marsavina, L. (2009). Influence of cracks and crack width on penetration depth of chlorides in concrete. *European Journal of Environmental and Civil Engineering*, 13(5), 561-572. doi: 10.3166/EJCE.13. 561-572
- Bertolini, L., Elsener, B., Pedferri, P. and Polder, R. (2004). *Corrosion and protection of steel in concrete: prevention, diagnosis, repair*. Wiley.
- Collepari, M. and Biagini, S. (1989). Effect of water/cement ratio, pozzolanic addition and curing time on chloride penetration into concrete. In *Proceedings of the ERMCO '89*, Stavanger, Norway, 606-615.
- Collepari, M., Marcialis, A. and Turriziani, R. (1970). La cinetica di penetrazione degli ioni cloruro nel calcestruzzo. *Il Cemento*, 67, 157-164.
- Gu, C., Ye, G. and Sun, W. (2015). A review of the chloride transport properties of cracked concrete: experiments and simulations. *Journal of Zhejiang University-SCIENCE A*, 16, 81-92. doi: 10.1631/jzus.A1400247
- Li Y., Chen X., Jin L. and Zhang R. (2016). Experimental and numerical study on chloride transmission in cracked concrete. *Construction and Building Materials*, 127, 425-435. doi: 10.1016/j.conbuildmat.2016.10.044
- Marsavina, L., Audenaert, K., De Schutter, G., et al., (2009). Experimental and numerical determination of the chloride penetration in cracked concrete. *Construction and Building Materials*, 23(1), 264-274. doi: 10.1016/j.conbuildmat.2007.12.015
- Russo, N., Gastaldi, M., Marras, P., Schiavi, L., Strini, A. and Lollini, F. (2019). A preliminary study on the effects of cracks on chloride penetration in different concretes. In *Proceedings of the V Workshop on The New Boundaries of Structural Concrete*, Milan, Italy, 315-324.
- Yoon I.S. and Schlangen E. (2014). Experimental examination on chloride penetration through micro-crack in concrete. *KSCE Journal of Civil Engineering*, 18, 188-198. doi: 10.1007/s12205-014-0196-9

XV DBMC

15th International Conference
on Durability of Building
Materials and Components



- Barcelona School of Building Construction
- Barcelona School of Civil Engineering
- Barcelona School of Architecture
- Vallès School of Architecture



CIMNE⁹
International Center
for Numerical Methods in Engineering