


Drag reduction on a transonic airfoil

How does reducing friction drag reduce drag?



M. Quadrio¹, A. Chiarini¹, J. Banchetti¹, D. Gatti², A. Memmolo³ & S. Pirozzoli⁴

EDRFCM 2022, Paris, Sept. 7

¹Politecnico di Milano, ²Karlsruhe Institute of Technology, ³CINECA Interuniversity Consortium, ⁴La Sapienza Università di Roma


A simple question for the drag reduction community

- Skin-friction drag reduction (DR) is often studied for low- Re flows in **simple geometries**
- For a complex body, skin-friction DR should be extrapolated to total DR
- The **standard** answer is: in proportion!

We answer **differently**, with a story told through EDRFCMs 2017-2022



- Preliminary study (coarse RANS, wall functions, DR model)
- Suggests that pressure distribution is affected
- Resemblance with similar studies for riblets

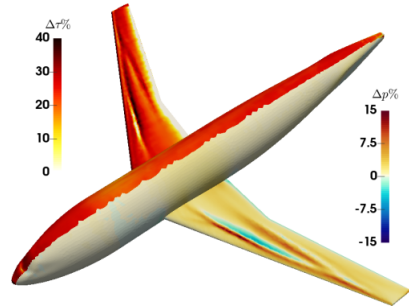


EDRFCM 2017: Drag reduction of a wing-body configuration via spanwise forcing, J.Banchetti, A.Gadda, G.Romanelli & M.Quadrio

Chap.2: EDRFCM 2019, Bad Herrenalb

First answer, simple physics



- Reliable modelling (DNS, DR accounted for directly)
- Still simple physics
- Confirmation that skin-friction DR may lead to pressure DR too

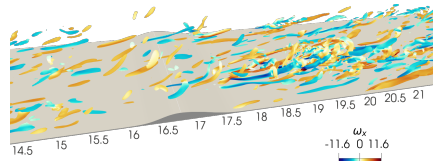


EDRFCM 2019: Turbulent drag reduction for a wall with a bump, J.Banchetti & M.Quadrio
Paper: J.Banchetti *et al*: Turbulent drag reduction over curved walls. J. Fluid Mech. 2020, 896 A10.

Chap.3: EDRFCM 2022, Paris

Final answer, richer physics



- Reliable modelling (DNS, DR accounted for directly)
- Richer physics (compressible flow over a transonic wing with shock wave)
- Extrapolation to the entire airplane

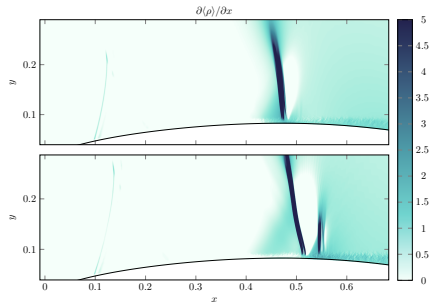


EDRFCM 2022: This talk

Paper: M.Quadrio *et al*: Drag reduction on a transonic airfoil. J. Fluid Mech. 2022, **942** R2.

Turbulent flow over a transonic airfoil

- Direct Numerical Simulation (up to 1.8 billions cells)
- Supercritical V2C airfoil
- $Re_{\infty} = 3 \times 10^5$, $M_{\infty} = 0.7$, $\alpha = 4^{\circ}$
- Control by spanwise forcing (steady StTW)
- Only a portion of the suction side is controlled

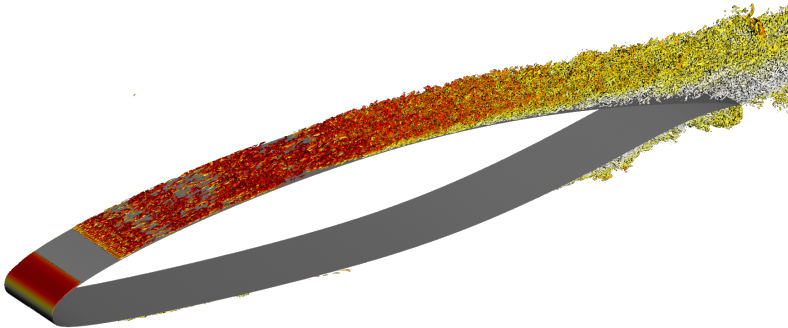


Two control layouts

For C1:


- $A_1 = 0.5$, $\omega = 11.3$, $\kappa_x = 161$
- $x_{s,1} = 0.3c$, $x_{e,1} = 0.78c$

For C2:

- $A_2 = 0.68$, $\omega = 11.3$, $\kappa_x = 161$
- $x_{s,2} = 0.2c$, $x_{e,2} = 0.78c$

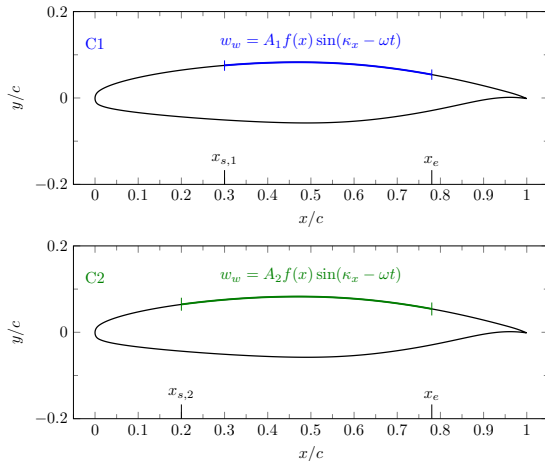

The mean flow

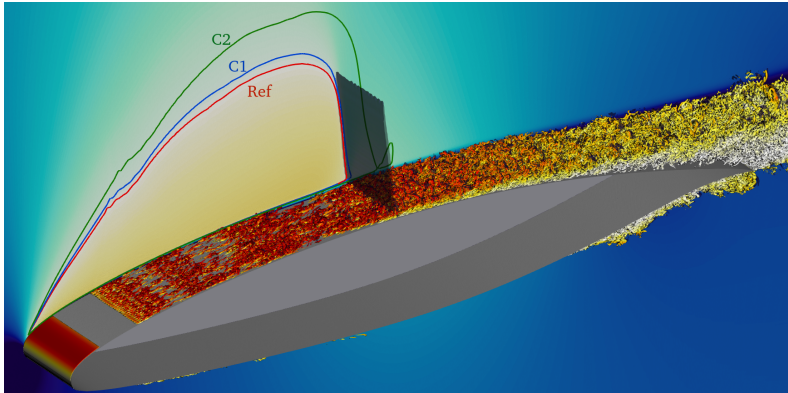


— $M = 1$ (Ref)

— $M = 1$ (C1)

— $M = 1$ (C2)

Instantaneous flow: near-wall fluctuations

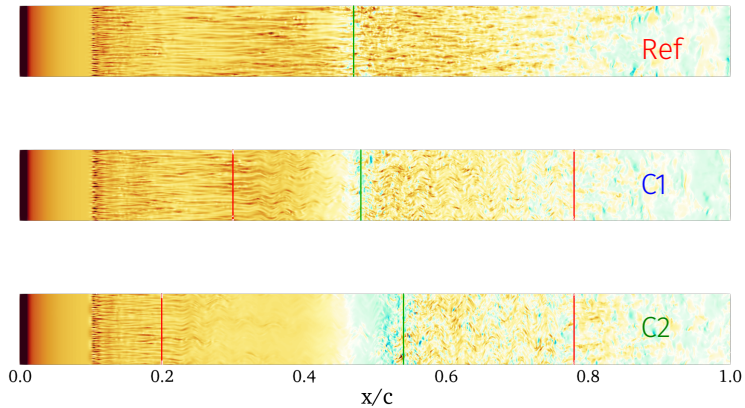


— shock position

— x_s and x_e


Friction coefficient

$$c_f = \frac{2\tau_w}{\rho_\infty U_\infty^2}$$

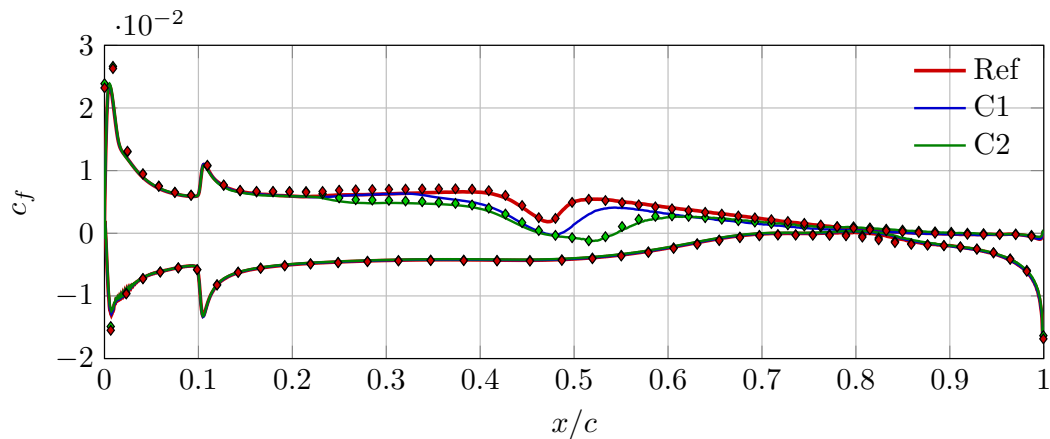

Pressure coefficient

$$c_p = \frac{2(p_w - p_\infty)}{\rho_\infty U_\infty^2}$$

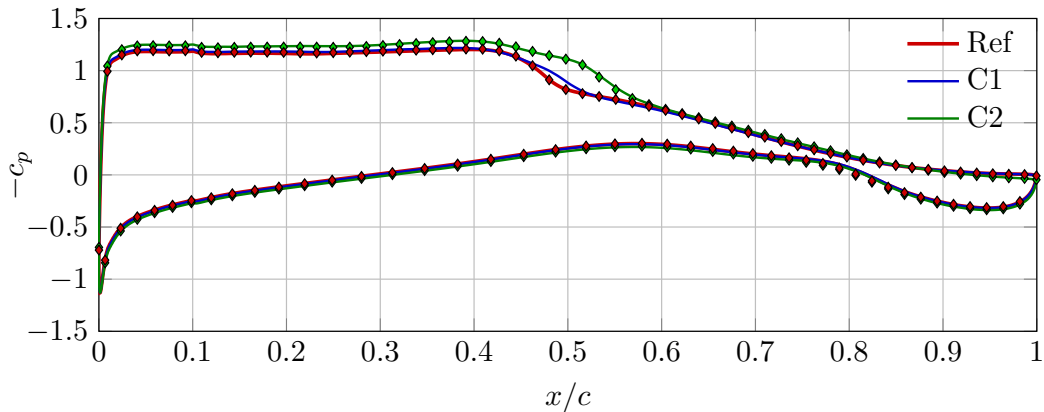

Aerodynamic forces

At the same incidence angle $\alpha = 4^\circ$

	Reference	C2	Δ_2	C2 ($\alpha = 3.45^\circ$)	Δ_2
C_ℓ	0.740	0.825	+11.3%	0.730	-1.3%
C_d	0.0247	0.0245	-0.8%	0.0210	-15.0%
$C_{d,f}$	0.0082	0.0071	-13.4%	0.0074	-9.7%
$C_{d,p}$	0.0165	0.0174	+5.5%	0.0136	-17.6%
C_ℓ/C_d	29.7	33.7	+13.5%	34.8	+17.2%

Aerodynamics forces

Approximately at the same C_ℓ

	Reference	C2	Δ_2	C2 ($\alpha = 3.45^\circ$)	Δ_2
C_ℓ	0.740	0.825	+11.3%	0.730	-1.3%
C_d	0.0247	0.0245	-0.8%	0.0210	-15.0%
$C_{d,f}$	0.0082	0.0071	-13.4%	0.0074	-9.7%
$C_{d,p}$	0.0165	0.0174	+5.5%	0.0136	-17.6%
C_ℓ/C_d	29.7	33.7	+13.5%	34.8	+17.2%

How does it scale to a full aircraft?


How does it scale to a full aircraft?

Assumptions:

- The wing is responsible for the **entire** lift and **1/3** of the non-lift-induced drag
- ΔC_ℓ and ΔC_d induced by control **do not change** along the wing span
- ΔC_ℓ and ΔC_d induced by control **do not change** with α , Re_∞ and M_∞

How does it scale to a full aircraft?


- DLR-F6 (Second AIAA CFD drag prediction workshop)
- Data from <https://aiaa-dpw.larc.nasa.gov>
- Control C2 in flight conditions: $M_\infty = 0.75$,
 $Re_\infty = 3 \times 10^6$

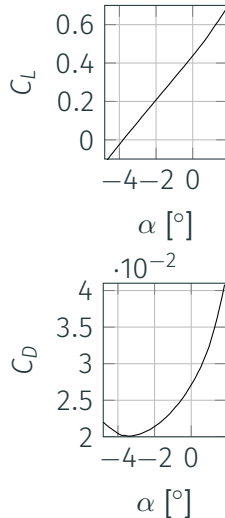

How does it scale to a full aircraft?

- DLR-F6 (Second AIAA CFD drag prediction workshop)
- Data from <https://aiaa-dpw.larc.nasa.gov>
- Control C2 in flight conditions: $M_\infty = 0.75$,
 $Re_\infty = 3 \times 10^6$

	Uncontrolled	Controlled
C_L	0.5	0.5
α	0.52°	0.0125°
C_D	0.0295	0.0272

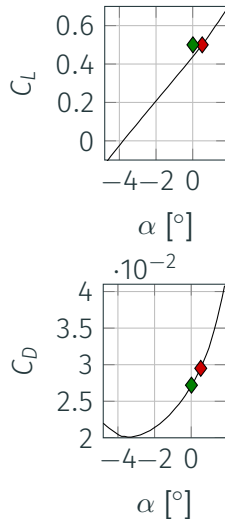


How does it scale to a full aircraft?

- DLR-F6 (Second AIAA CFD drag prediction workshop)
- Data from <https://aiaa-dpw.larc.nasa.gov>
- Control C2 in flight conditions: $M_\infty = 0.75$,
 $Re_\infty = 3 \times 10^6$

	Uncontrolled	Controlled
C_L	0.5	0.5
α	0.52°	0.0125°
C_D	0.0295	0.0272

$$\Delta C_D \approx 9.0\%$$


actuation power $\approx 1\%$ of the overall power expenditure

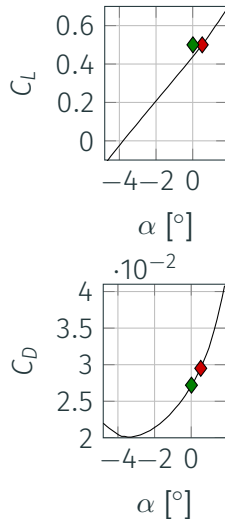

Conclusions

- The **global** aerodynamic performance of the wing is improved by **locally** reducing skin friction over a portion of the suction side
- We measure $\Delta C_d \approx 15\%$ and $\Delta C_D \approx 9\%$ (but more is possible!)
- Skin-friction drag reduction should be considered as a **tool** and not only as a goal

Mean flow: downstream shift of the shock

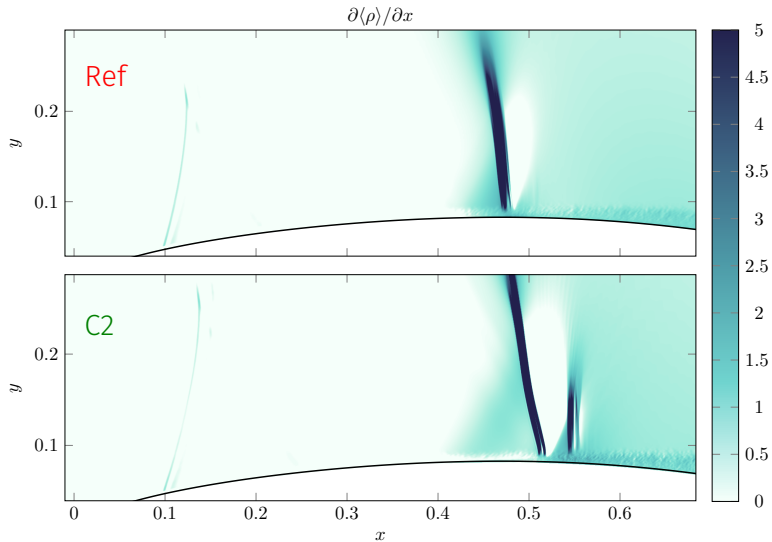

Aerodynamic forces

At the same incidence angle $\alpha = 4^\circ$

	Reference	C1	Δ_1	C2	Δ_2	C2 ($\alpha = 3.45^\circ$)	Δ_2
C_ℓ	0.740	0.751	+1.5%	0.825	+11.3%	0.730	-1.3%
C_d	0.0247	0.0236	-4.5%	0.0245	-0.8%	0.0210	-15.0%
$C_{d,f}$	0.0082	0.0076	-7.3%	0.0071	-13.4%	0.0074	-9.7%
$C_{d,p}$	0.0165	0.0161	-2.4%	0.0174	+5.5%	0.0136	-17.6%
C_ℓ/C_d	29.7	31.7	+6.8%	33.7	+13.5%	34.8	+17.2%

Aerodynamic forces

At the same incidence angle $\alpha = 4^\circ$

	Reference	C1	Δ_1	C2	Δ_2	C2 ($\alpha = 3.45^\circ$)	Δ_2
C_ℓ	0.740	0.751	+1.5%	0.825	+11.3%	0.730	-1.3%
C_d	0.0247	0.0236	-4.5%	0.0245	-0.8%	0.0210	-15.0%
$C_{d,f}$	0.0082	0.0076	-7.3%	0.0071	-13.4%	0.0074	-9.7%
$C_{d,p}$	0.0165	0.0161	-2.4%	0.0174	+5.5%	0.0136	-17.6%
C_ℓ/C_d	29.7	31.7	+6.8%	33.7	+13.5%	34.8	+17.2%

Aerodynamic forces

Approximately at the same C_ℓ

	Reference	C1	Δ_1	C2	Δ_2	C2 ($\alpha = 3.45^\circ$)	Δ_2
C_ℓ	0.740	0.751	+1.5%	0.825	+11.3%	0.730	-1.3%
C_d	0.0247	0.0236	-4.5%	0.0245	-0.8%	0.0210	-15.0%
$C_{d,f}$	0.0082	0.0076	-7.3%	0.0071	-13.4%	0.0074	-9.7%
$C_{d,p}$	0.0165	0.0161	-2.4%	0.0174	+5.5%	0.0136	-17.6%
C_ℓ/C_d	29.7	31.7	+6.8%	33.7	+13.5%	34.8	+17.2%

Computational details

- compressible NS solver for a calorically perfect gas: second-order FV method, with locally 3rd-order WENO numerical flux with Ducros sensor
- domain with spanwise width $0.1c$, mesh radius $25c$
- incoming laminar flow, periodic spanwise boundary conditions
- baseline mesh $4096 \times 512 \times 256$
- resolution after Zauner, De Tullio & Sandham (2019) (but at lower Re), then checked a posteriori to obey requirements set forth by Hosseini et al. 2016
- statistics accumulated for $40c/U_\infty$