

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 January 2009 (29.01.2009)

PCT

(10) International Publication Number
WO 2009/013151 A1

- (51) International Patent Classification:
G01C 13/00 (2006.01) *G01F 23/22* (2006.01)
- (21) International Application Number:
PCT/EP2008/059075
- (22) International Filing Date: 11 July 2008 (11.07.2008)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
MI2007A001506 26 July 2007 (26.07.2007) IT
- (71) Applicant (for all designated States except US): **PO-LITECNICO DI MILANO** [IT/IT]; Piazza Leonardo da Vinci 32, I-20133 Milano (MI) (IT).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **CIGADA, Alfredo** [IT/IT]; Via La Masa 34, I-20156 Milano (MI) (IT). **BAL-LIO, Francesco** [IT/IT]; Piazza Leonardo da Vinci 32,

I-20133 Milano (MI) (IT). **INZOLI, Fabio** [IT/IT]; Via Padre Boga 23, I-20031 Cesano Maderno (MI) (IT).

(74) Agent: **FIORANI, Giuseppe**; Piazza San Babila, 5, I-20122 Milano MI, (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: HYDRAULIC MONITORING UNIT

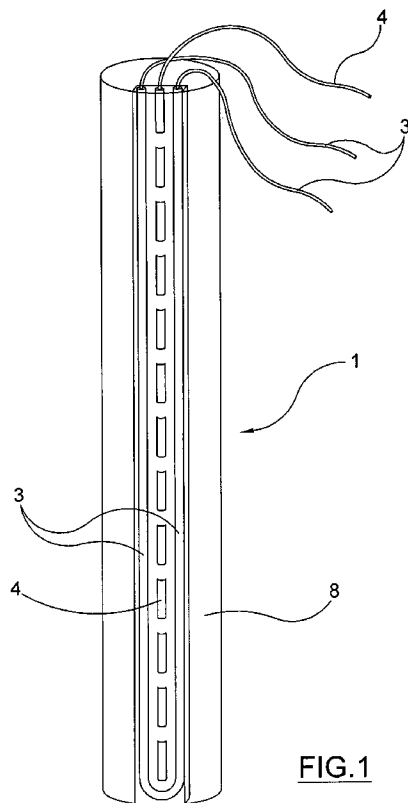


FIG. 1

(57) Abstract: The present invention concerns a device (1) for measuring the position of the bed and surface of a river, in which the device comprises a support (2) along which a plurality of measurement areas (5) and means (3, 5) suitable for determining the local heat dissipation in each measurement area (5) are defined; the present invention also concerns a method for determining the position of such interfaces, in which a device (1) according to the present invention is arranged so that it intersects the interface, ensuring that one or more measurement areas (5) are immersed in each of the means constituting the interface and finding the value of the power dissipated in the measurement areas (5) from the temperature measured at said means.

WO 2009/013151 A1



FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Title: "HYDRAULIC MONITORING UNIT"

The present invention refers to a hydraulic monitoring unit, suitable for detecting the position of the solid-liquid and liquid-aeriform interfaces, for example to evaluate the condition of the piers that support river bridges or, more in general to monitor the phenomena of raising-lowering of the river bed.

The monitoring of the position of such interfaces is particularly important in the case of watercourses subject to rapid variations in flow rate: sudden increases in flow rate, for example due to heavy rain, can generate erosion phenomena at the base of river piers, with consequent decrease in the useful load capacity of the bridge they support, increasing the risk of collapse.

Therefore there is a clear need to develop techniques for evaluating the evolution over time of the position of the river bed.

A first methodology for measuring such a position involves an echo sounder: by measuring the time needed for an acoustic signal to come back after being reflected from the bed, it is possible to determine the depth of the river; this system however, has some criticalities, and in particular the need for accurate assembly and armour-plating to withstand the stresses and to avoid potential obstructions caused by the materials transported by the currents, as well as the possibility of significant noise levels and possible measurement errors due to dynamic fluid disturbance (turbulence, bubbles, transported material). The echo sounders must also be oriented so as to not sense the presence of the structure that they are monitoring and, therefore, they do not allow the bed to be detected in the positions immediately adjacent to the structure itself.

A second methodology uses a temperature profile sounder, which measures the temperatures at different depths. This system takes advantage of the fact that, normally, the water temperature is different from those of the surrounding ground and air.

Temperature profile sounders are relatively simple to install, but can be unreliable, for example in the case of thermal inversion in the water, or if - for example in winter - it is impossible to notice any difference between the temperature of the air and of that of the water; moreover, since at the solid-liquid interface of a river the ground is soaked in water, it is not always possible to determine the position of such an interface with adequate precision. Moreover, such measurement methods, generally based upon thermocouples, require complex electrical insulation systems when immersed in water.

In view of the described state of the art, the purpose of the present invention is that of making a device which is even more precise and reliable than those known in the prior art. In particular, it is intended to at least partially mitigate the drawbacks of the most common methods, due to the large bulk of the components and to their sensitivity to humidity, to the sensitivity of the measurement to disturbance induced by the current during floods (turbulence, bubbles, floating debris, sediment in suspension), and to the drift typical of electronic components.

In accordance with the present invention, such a purpose is reached by a device in accordance with claim 1 and/or by a measurement method according to claim 11.

The characteristics and the advantages of the present invention shall become clear in the following detailed description of a practical embodiment, given as an example and not for limiting purposes with reference to the attached drawings, in which:

-figure 1 shows a schematic view of a device according to the present invention applied onto a pier of a bridge;

-figure 2 shows a schematic view of a cross section of a first preferred embodiment of the device of the present invention;

-figure 3 shows a schematic view of a cross section of a second preferred embodiment of the device of the present invention

-figure 4 shows a schematic view of a cross section of a

third preferred embodiment of the device of the present invention;

-figure 5 shows a schematic view of a fourth preferred embodiment of a device according to the present invention applied onto a pier of a bridge;

-figure 6 shows a schematic view of a fifth preferred embodiment of a device according to the present invention applied onto a pier of a bridge.

With reference to the figures, the measurement device according to a preferred embodiment of the present invention is globally indicated with 1. In the figures, the device 1 is represented applied onto the pier of a bridge; in figures 2, 3 and 4, the water medium, representing the water of a river, is indicated with the letter A.

The device 1 comprises a support 2, heat generating means 3, for example electrical resistances, and a temperature probe 4, on which a plurality of measurement areas 5 are made, spaced apart from one another.

The support 2 has a portion of its own surface which is not thermally insulated from the external environment, i.e. the medium in which it is immersed; in the embodiments represented in the figures, such a non-thermally insulated surface is indicated with 9; consequently the other surfaces are coated with a thermal insulator 10.

In the embodiments of figures 2 and 3, for example, the support 2 comprises a sandwich structure inside of which the heat generating means 3 and the temperature probe 4 are inserted.

Advantageously, the temperature probe 4 comprises an optical fibre for measuring the temperature for example comprising Bragg lattices 6 within, which define the measurement areas 5.

The operation of the temperature probe 4 with Bragg lattices 6 is as follows: through a luminous beam of a suitable wavelength it is possible to determine whether the Bragg lattice 6 has undergone deformations compared to a known reference configuration, and therefore calculate the temperature of the

optical fibre (or rather of the temperature probe 4) at the measurement area 5.

This temperature measuring technique is already known *per se* and therefore will not be described any further.

5 As can be seen in figures 5 and 6, the heat generating means can be made for example with a cable comprising heating portions 11, in which most of the heat production occurs, alternating with portions having low heat dissipation; the heating portions 11 can advantageously be arranged at the measurement areas 6. In
10 this way the consumption of the device 1 is reduced to the minimum necessary.

The support 2 is moreover connected to suitable processing means, for measuring the temperature in the measurement area 5; for the purpose of the present invention the physical position
15 of such processing means is not relevant: they can be arranged either completely in the proximity of the device 1, or in a distributed way, at least partially in a remote position.

A preferred way of operating of the device 1 for measuring the position of the solid-liquid or liquid-aeriform interface
20 shall now be described.

The device 1 as previously described must be arranged across the interfaces the position of which one wishes to measure. For example, should one wish to measure the solid-liquid and liquid-aeriform interfaces of a watercourse, the device 1 can be fixed
25 for example to a supporting pier 8 of a bridge, so that a substantial portion of the support 2 is immersed in each of the solid, liquid and aeriform media.

By "a substantial portion" it is meant a portion comprising one or more measurement areas 5.

30 During the measurement, the heat generating means 3 are energized, so as to increase the temperature near each measurement area 5. In this way, since the heat exchange coefficient between the device 1 and each of the three solid, liquid and aeriform media is different, the heating produced by
35 the heat generating means 3 will have different effects in each means and the temperature measured will therefore be different.

Indeed, the temperature measured will for example be at its minimum in the liquid medium, where the device, immersed into a liquid current with a relatively low temperature, will rapidly give its heat away to the flowing liquid.

5 The measured temperature in the solid medium, on the other hand, where the heat exchange coefficient substantially coincides with the heat exchange coefficient of the solid medium itself, will certainly be greater, with an abrupt increase of the temperature right at the solid-liquid interface.

10 In fact, since the solid medium is not normally compact, the spatial variation of the heat exchange coefficient will be made milder by phenomena such as movement of the upper layers of the solid medium and/or the infiltration of the liquid medium inside the surface layers of the solid medium. The variation in the
15 heat dissipation coefficient is in any case sufficiently clear so as to allow a sufficiently precise measurement of the position of the interface.

Equally, the temperature measured at the measurement areas 5 exposed to air will be higher than that measured at the
20 measurement areas 5 immersed into water, due to the different characteristics of heat conducting properties of the two fluids.

The position of the liquid-aeriform interface can also be determined at an abrupt variation in the temperature profile thus obtained.

25 Since the temperature measured depends on both the heat exchange coefficient and on the difference in temperature between the outside temperature and the temperature of the heat generating means 3, it will be possible to adapt the operation of the device 1 to different environmental conditions, for
30 example increasing or decreasing the power dispersed by the heat generating means 3 to avoid two different measuring points relative to two different media (e.g. solid, liquid or aeriform) accidentally having the same temperature value, because of a particular combination of temperature difference and heat
35 exchange coefficient.

The power supplied to the heat generating means 3 can

therefore be selected so that determining the position of the interfaces is not influenced by the small natural temperature variations of each medium (for example, the temperature of the water of a river can vary by 0.1°C in the space of twenty-four hours).

It is also possible to foresee one or more measuring points in one, in two or in all the different media, wherein there is no heat dissipation, so as to have a reference point against which to assess the reading of the measurement areas 5.

The embodiment of figure 6 is an example of this arrangement: in it, the heat generating means 3 generate heat only near to some measurement areas 6; more precisely the measurement areas 6 are alternatively free of heating portions 11 and close to heating portions 11 of the heat generating means.

A preferred embodiment of the present invention foresees that the heat generating means 3 be supplied with a power equal to about 0.5 W/m .

The distance D between the measurement areas determines the spatial resolution of the device 1 according to the present invention. For the purposes of measuring the position of interfaces, it is considered that a value less than 3m , preferably less than 1 m , for example of about 50 cm , is sufficient. In any case, it is considered that D must be less than 10 m to achieve the purposes of the present invention.

Advantageously, it is possible to foresee a constant distance D between successive measurement areas 5, or the measurement areas 5 can be more concentrated in portions where a greater spatial resolution is desired.

As can be seen, the present invention is particularly suitable for determining, also remotely, the variation in the level and in the position of the river beds, in particular for the research and the monitoring of erosion in piers of bridges.

Consequently, there are various ways in which it is possible to arrange the devices according to the present invention onto a bridge.

For example it is possible to arrange a plurality of devices around a pier 8, to monitor the variation in position of the interface depending on the position compared to the current of the river; or it is possible to place one or more devices on some or onto all the piers; the devices can be placed linearly onto the piers, into a U shape or into a spiral (fully or else just partially), with advantages that a man skilled in the art would immediately understand.

Of course, a man skilled in the art, can bring numerous modifications and variations to the configurations described above, in order to satisfying contingent and specific requirements.

For example, although the present invention has been described with particular reference to the measurement of solid-liquid and/or liquid-aeriform interfaces inside a watercourse, it is clear that the use is not necessarily limited to this application, but it can be extended to the measurement of the position of any interface between two distinct phases having different thermal conductivity.

Furthermore, the present device could also be made with two temperature probes fixed, for example parallel to one other, on the same support 2, or with a first temperature probe fixed on the support 2 and a second temperature probe substantially thermally independent from the first but physically arranged near to it. The second probe could for example be inserted directly into each means, so as to provide a reference reading with which to evaluate the temperature dispersion more precisely.

In this case it is possible to solve the problems caused by the situation in which the same heat dissipation is detected between two distinct media, but this is caused by two different heat exchange coefficients compensated by two different thermal jumps. This situation occurs for example with very cold air (low heat exchange coefficient but very high temperature difference) and hotter water but flowing (high heat exchange coefficient and small temperature difference). All these modifications are

anyhow covered by the scope of protection of the invention as defined by the following claims.

CLAIMS

1. Device (1), particularly for measuring the position of solid-liquid and liquid-aeriform interfaces inside flowing water,

5 comprising at least one support (2), substantially longitudinal and suitable for being arranged along the profile to be measured, along which a plurality of measurement areas (5) are defined;

characterised in that

10 said device (1) comprises means (3, 5) suitable for determining the local dissipation of heat in each of said measurement areas (5).

2. Device (1) according to the previous claim, wherein said measurement areas (5) are temperature measurement areas, made on
15 at least one temperature probe (4), said temperature probe (4) being contained in said support (2).

3. Device (1) according to the previous claim, wherein said temperature probe (4) comprises an optical fibre.

4. Device (1) according to the previous claim, wherein said
20 measurement areas (5) are areas in which there is a Bragg lattice (6).

5. Device (1) according to the previous claim, wherein the distance (D) between two consecutive measurement areas (5) is less than 3 metres.

25 6. Device (1) according to any one of the previous claims, comprising heat generating means (3) suitable for increasing the temperature near to said measurement areas (5).

7. Device (1) according to the previous claim, wherein said heat generating means (3) comprise a resistance.

30 8. Device (1) according to any one of the previous claims, wherein said heat generating means (3) comprise heating portions (11) alternating with portions having low heat dissipation.

9. Device (1) according to the previous claim, wherein at least some of said measurement areas (5) are arranged near to said
35 heating portions (11).

10. Device (1) according to any one of claims 8 or 9, wherein at least some of said measurement areas are arranged near to said portions having low heat dissipation.

11. Method for determining the position of one or more
5 interfaces between two phases, said phases being selected from the group consisting of a solid phase, a liquid phase and an aeriform phase, said method comprising the steps of:

- arranging a device (1) according to any one of the previous claims along a direction transversal to the interface the
10 position of which one wishes to measure, so that said device (1) intersects the interface itself;
- one or more of said measurement areas (5) being immersed in each of the phases constituting said interface;
- measuring the temperature at said measurement areas (5).

12. Method according to the previous claim, comprising the step
15 of locally increasing the temperature near said measurement areas (5).

13. Method according to the previous claim, comprising the step
20 of determining the heat dissipation values of each measurement area (5) based upon the measured temperature values.

14. Method according to the previous claim, comprising the step
of determining the position of the solid-liquid and liquid-
aeriform interfaces from said heat dissipation values of each
measurement area (5).

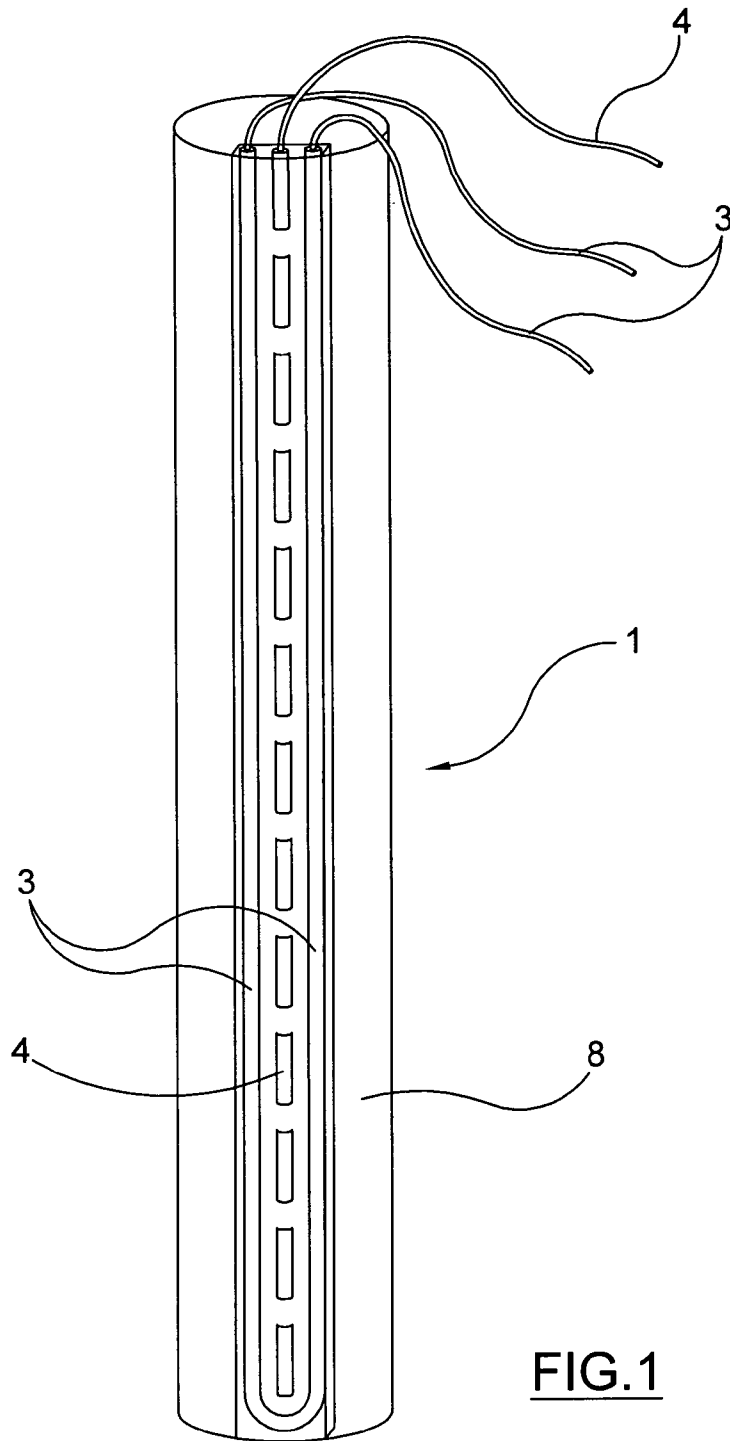


FIG.1

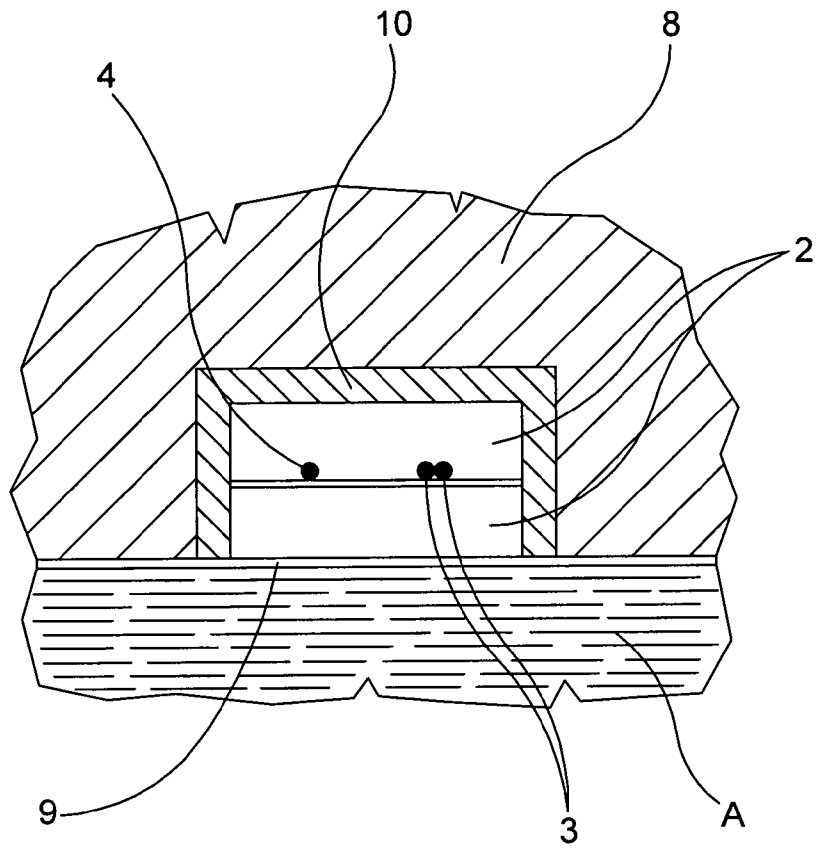


FIG.2

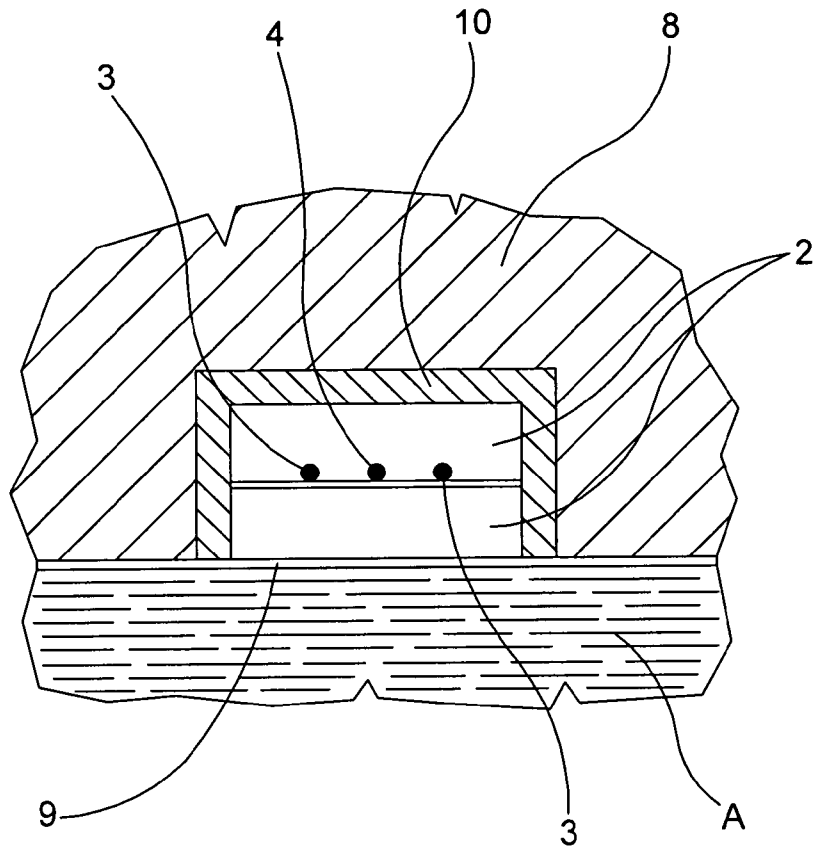


FIG.3

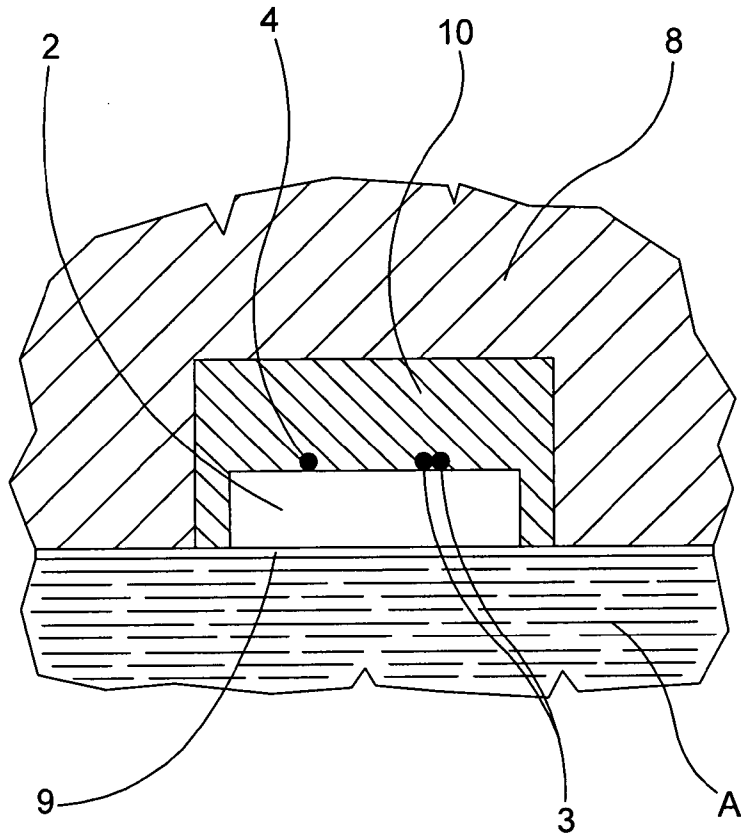


FIG.4

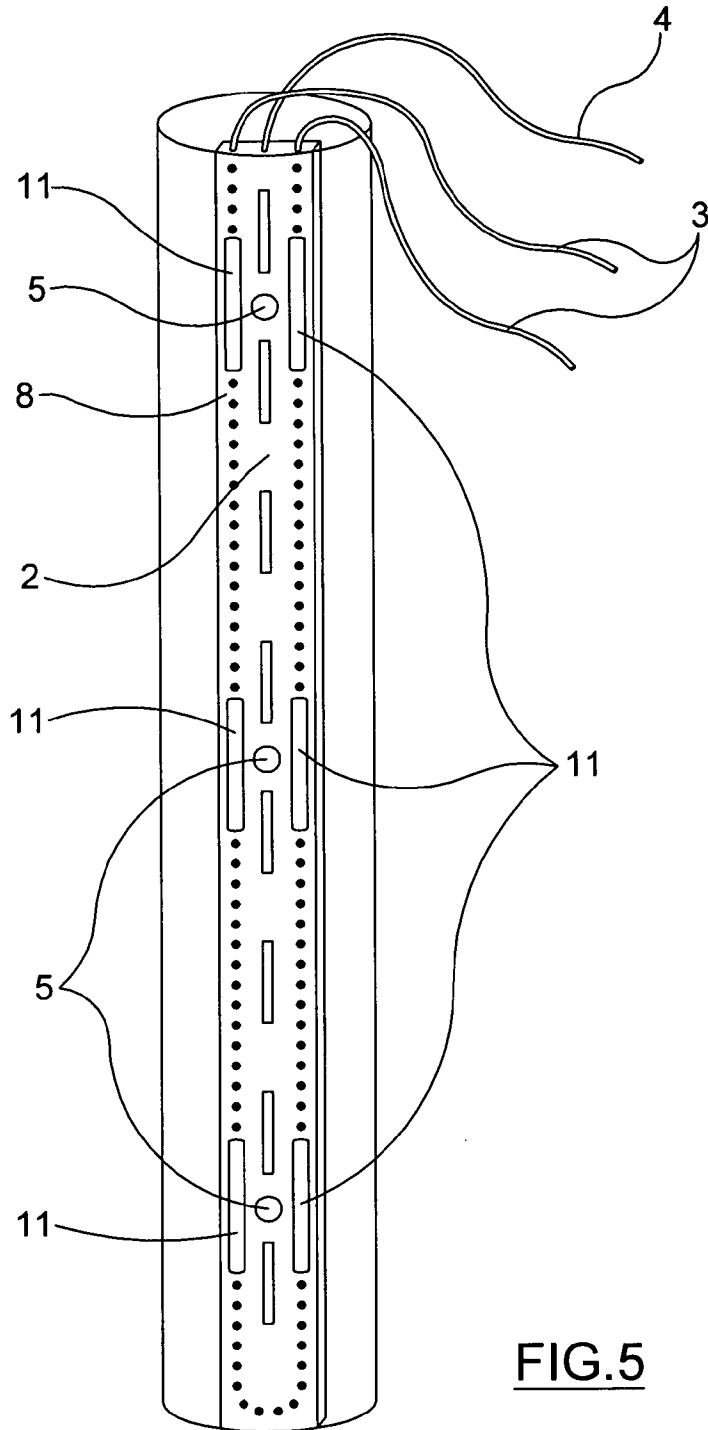


FIG.5

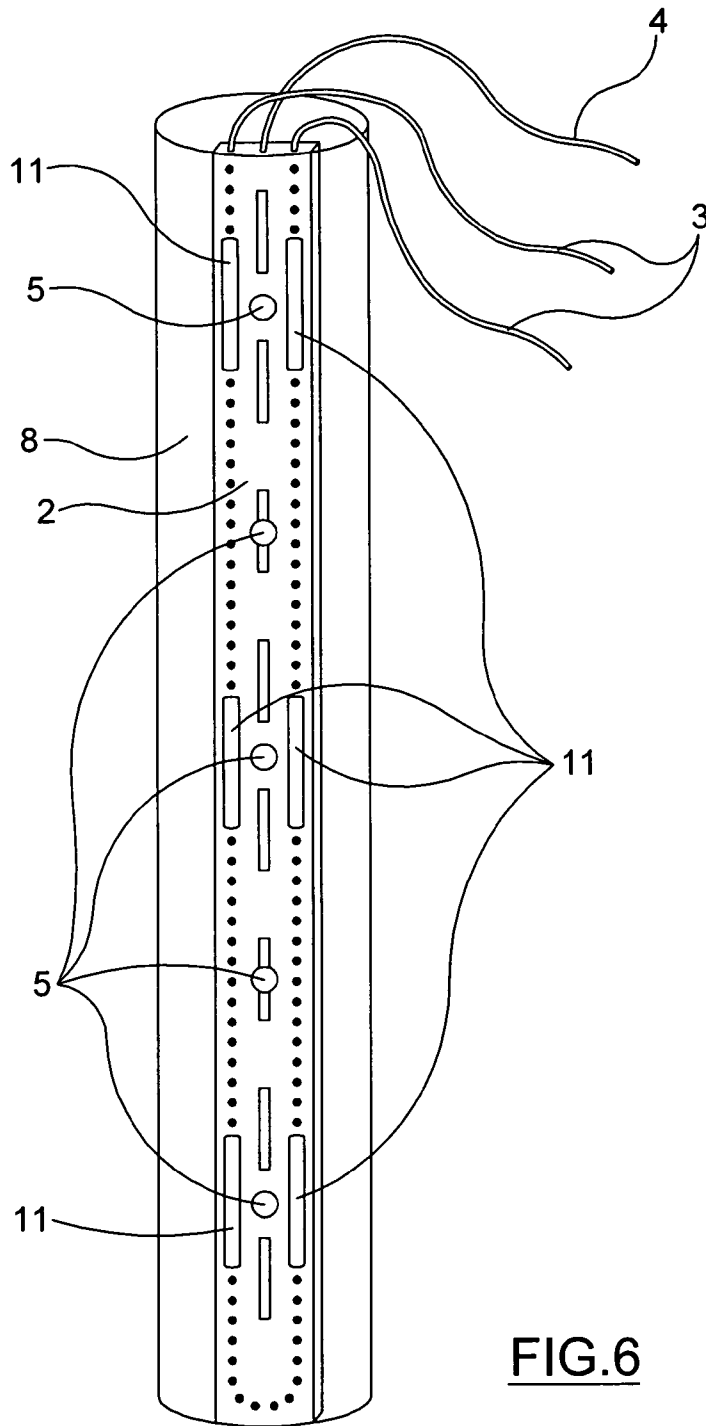


FIG.6

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2008/059075

A. CLASSIFICATION OF SUBJECT MATTER INV. G01C13/00 G01F23/22				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols) G01C G01F				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	US 2005/126282 A1 (MAATUK JOSEF [US]) 16 June 2005 (2005-06-16)	1,2,5-7, 9,11-14		
Y	paragraph [0011]	3,4		
A	paragraphs [0030] - [0032] paragraph [0038] - paragraph [0042]	8,10		
X	US 4 785 665 A (MCCULLOCH REG W [US]) 22 November 1988 (1988-11-22) column 1, line 13 - line 68 column 2, line 23 - line 60	1,2,5-14		
Y	FR 2 766 266 A (BERTIN & CIE [FR]) 22 January 1999 (1999-01-22) page 5, line 1 - page 6, line 17	3,4		
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.				
* Special categories of cited documents :				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; border: none; vertical-align: top;"> *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family </td> </tr> </table>			*A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family
A document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family			
Date of the actual completion of the international search		Date of mailing of the international search report		
13 October 2008		21/10/2008		
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Rabenstein, Winfried		

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2008/059075

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005126282 A1	16-06-2005	US 2007113646 A1	24-05-2007
US 4785665 A	22-11-1988	NONE	
FR 2766266 A	22-01-1999	NONE	