



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
04.03.2020 Bulletin 2020/10

(51) Int Cl.:
F25D 17/04 (2006.01)

(21) Application number: **19180637.1**

(22) Date of filing: **17.06.2019**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
 Designated Extension States:
BA ME
 Designated Validation States:
KH MA MD TN

- **Candiani, Gabriele**
21024 Cassinetta di Biandronno (VA) (IT)
- **Cigada, Alberto**
21024 Cassinetta di Biandronno (VA) (IT)
- **Cigada, Fabio Andrea**
21024 Cassinetta di Biandronno (VA) (IT)
- **De Nardo, Luigi**
21024 Cassinetta di Biandronno (VA) (IT)
- **Khizar, Muhammad**
21024 Cassinetta di Biandronno (VA) (IT)
- **Paola Pirovano, Maria**
21024 Cassinetta di Biandronno (VA) (IT)

(30) Priority: **29.08.2018 US 201816115836**

(71) Applicant: **Whirlpool Corporation**
Benton Harbor, MI 49022 (US)

(74) Representative: **Spina, Alessandro**
Whirlpool EMEA SpA
Via Carlo Pisacane, 1
20016 Pero (MI) (IT)

(72) Inventors:
 • **Buzzi, Ermanno**
21024 Cassinetta di Biandronno (VA) (IT)

(54) **AIR FILTRATION SYSTEM FOR ANTIMICROBIAL REFRIGERATORS**

(57) A refrigerator (10) includes a cabinet (14) coupled to one or more doors (18) forming a storage compartment (22). The refrigerator (10) additionally includes a first fan assembly (26) positioned on an interior surface (30) of a first cabinet wall (34), and a second fan assembly (38) positioned on the interior surface (30) of a second cabinet wall (42). The first and second fan assemblies (26, 38) each include: two or more circulation fans (46); a filter coupled to a photocatalyst (54) to form an activated filter (50); and a plurality of UV LEDs (58) positioned to project light on the activated filter (50). An air circulation path (62) is configured to direct air born bacteria (66) and particulate matter (70) within the storage compartment (22) contemporaneously into the first and second fan assemblies (26, 38) using the two or more circulation fans (46) and circulate filtered air into the storage compartment (22) through the activated filter (50) disposed in the air circulation path (62).

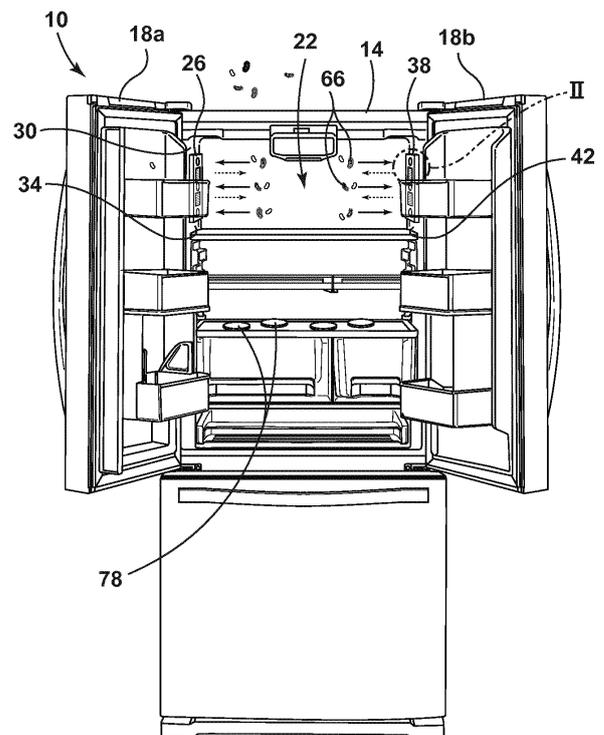


FIG. 1D

DescriptionFIELD OF THE INVENTION

[0001] The present invention generally relates to an air filtration system for a refrigerator, and more specifically, to air purifying assemblies used in conjunction to filter microbes, volatile organic compounds, and particulate matter from a refrigerator.

BACKGROUND OF THE INVENTION

[0002] With the latest development of extra-large capacity refrigerators, there has been an emerging demand for highly robust antimicrobial technology such as air disinfection systems for food preservation and related features. Such systems are used to avoid the spoilage of food and produce stored in refrigerators for extended periods. Due to the unavailability of adequate antimicrobial technology, huge amounts of food, including produce, can go wasted even when stored in adequately low temperature refrigerators. Moreover, because of the increasing cost of commodities and food product costs, consumers are demanding efficient food storage technology for its longevity without compromise to its freshness.

[0003] One food preservation technique currently being used includes titanium dioxide (TiO₂) charged using a mercury lamp lighting system but due to the harmful effects of the mercury lamp integrated in this system, it could not meet the specifications or expectations for an antimicrobial application. In addition, the use of mercury in these types of UV lamp systems could be extremely dangerous due to health hazards and other handling issues associated with mercury. Other preservation and antimicrobial techniques being used include ozonizer systems that are directly integrated into the refrigerator. However, with time, significant decline in ozonizer performance is reported and their high cost makes these applications prohibitively expensive. Nano-misting techniques have also been studied but due to the harmful nature of the zinc and silver used in the applied nanoparticles; these materials also did not meet consumer market requirements.

[0004] Accordingly, the need for an efficient and affordable antimicrobial filtration system is required in the market place for consumers to better accommodate food safety and longer storage times for valuable foodstuffs.

SUMMARY OF THE DISCLOSURE

[0005] According to one aspect of the present disclosure, a refrigerator is provided. The refrigerator includes a cabinet coupled to one or more doors forming a storage compartment; a first fan assembly positioned on an interior surface of a first cabinet wall; and a second fan assembly positioned on the interior surface of a second cabinet wall. The first and second fan assemblies each include: two or more circulation fans; a filter coupled to

a photocatalyst to form an activated filter; and a plurality of LEDs positioned to project light on the activated filter. The refrigerator also includes an air circulation path configured to direct airborne bacteria and particulate matter within the storage compartment contemporaneously into the first and second fan assemblies using the two or more circulation fans and circulate filtered air into the storage compartment through the activated carbon filter disposed in the air circulation path.

[0006] According to another aspect of the present disclosure, a refrigerator is provided. The refrigerator includes a cabinet coupled to one or more doors. The cabinet includes a storage compartment; two or more fan assemblies positioned on an interior surface of the cabinet, the one or more doors, or a combination thereof. The fan assemblies each include: one or more circulation fans; a photocatalyst coupled to one or more filters to form an activated filter; and a plurality of LEDs positioned to project light on the activated filter. An air circulation path is configured to direct airborne bacteria and particulate matter within the storage compartment contemporaneously into the two or more fan assemblies using the one or more circulation fans and circulate filtered air into the storage compartment through the activated filter disposed in the air circulation path.

[0007] According to still another aspect of the present disclosure, an antibacterial fan assembly is provided. The antibacterial fan assembly includes a rear assembly panel and an assembly cover panel wherein the assembly cover panel includes one or more air intakes and one or more air exhausts. The antibacterial fan assembly further includes one or more circulation fans positioned between the rear assembly panel and the assembly cover panel and an activated filter having a photocatalyst and an activated carbon. The activated filter is positioned in circulation with the one or more air exhausts. The antibacterial fan assembly also includes one or more LEDs positioned to project light on the activated filter.

[0008] These and other aspects, objects, and features of the present disclosure will be understood and appreciated by those skilled in the art upon studying the following specification, claims, and appended drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] In the drawings:

FIG. 1A is a front isometric view of a refrigerator having bacteria contaminated food;
 FIG. 1B is a front isometric view of a refrigerator having no food;
 FIG. 1C is a front isometric view of a refrigerator having a standard circulation fan;
 FIG. 1D is a front isometric view of a refrigerator having a first fan assembly and a second fan assembly according to some aspects of the disclosure;
 FIG. 2 is a partially schematic fragmentary view of the fan assembly taken at location II in FIG. 1D;

FIG. 3 is a rotating isometric view of a fan assembly according to some aspects of the present disclosure; FIG. 4A provides front and side view images of the fan assembly according to some aspects of the present disclosure;

FIG. 4B provides front and side views of a refrigeration cabinet cavity according to some aspects of the present disclosure;

FIG. 5A is a front view of a rear assembly panel according to some aspects of the present disclosure; FIG. 5B is a front view of an assembled rear panel assembly according to some aspects of the present disclosure;

FIG. 6A is a rear isometric view of an assembly cover panel according to some aspects of the present disclosure;

FIG. 6B is a rear view of the assembly cover panel provided in FIG. 6A according to some aspects of the present disclosure;

FIG. 7 is an exploded side view of a fan assembly and refrigeration liner according to some aspects of the present disclosure;

FIG. 8A is a front view of an alternative embodiment of a fan assembly according to some aspects of the present disclosure;

FIG. 8B is an exploded side view of the fan assembly provided in FIG. 8A according to some aspects of the present disclosure;

FIG. 9A is a picture of the experimental set up of the nebulization of an inoculum solution using a fan assembly for fan filtration according to some aspects of the present disclosure;

FIG. 9B is a distribution of microbial populations in a control using one fan assembly;

FIG. 9C provides averages of the distribution of microbial populations at various different times;

FIG. 10 is a quantification of viable bacteria after incubation with different air filters at different time intervals;

FIG. 11A provides a plot of the percentage of volatile organic compounds over a period of time using different air filters according to some aspects of the present disclosure; and

FIG. 11B provides the percentage of total solid particulates over a period of time using different filtration systems according to some aspects of the present disclosure.

that the specific devices and processes illustrated in the attached drawings, and described in the following specification, are simply exemplary embodiments of the inventive concepts defined in the appended claims. Hence, specific dimensions and other physical characteristics relating to the embodiments disclosed herein are not to be considered as limiting, unless the claims expressly state otherwise.

[0011] As used herein, the term "and/or," when used in a list of two or more items, means that any one of the listed items can be employed by itself, or any combination of two or more of the listed items can be employed. For example, if a composition is described as containing components A, B, and/or C, the composition can contain A alone; B alone; C alone; A and B in combination; A and C in combination; B and C in combination; or A, B, and C in combination.

[0012] Referring to FIGS. 1A-11B, the reference numeral 10 refers to a refrigerator. The refrigerator 10 includes a cabinet 14 coupled to one or more doors 18 forming a storage compartment 22. The refrigerator 10 additionally includes a first fan assembly 26 positioned on an interior surface 30 of a first cabinet wall 34, and a second fan assembly 38 positioned on the interior surface 30 of a second cabinet wall 42. The first and second fan assemblies 26, 38 each include: two or more circulation fans 46; a filter coupled to a photocatalyst 54 to form an activated filter 50; and a plurality of light emitting diodes (LEDs) 58 positioned to project light on the activated filter 50. An air circulation path 62 configured to direct air born bacteria 66 and particulate matter 70 within the storage compartment 22 contemporaneously into the first and second fan assemblies 26, 38 using the two or more circulation fans 46 and circulate filtered air into the storage compartment 22 through the activated filter 50 disposed in the air circulation path 62.

[0013] The first and second fan assemblies 26, 38 and/or the air purifying duct assembly 192 provide an antimicrobial technology for in-vitro time-dependent reduction of microbial populations after exposure to the activated filter 50 and corresponding UV and/or visible light LEDs 58. The technology incorporated into these fan assemblies 26, 38 includes the activated filter 50 and LEDs 58 providing an efficient air treatment capability that may interact with the deoxyribonucleic acid (DNA) and/or trigger a cascade of other biological reactions in harmful bacteria responsible for the spoilage of food stored at low temperatures in refrigerators. The disclosure herein provides a series of experiments performed according to the ASTM E 2315 and ISO 22196 international standards using minor modifications. In some aspects, the activated filter 50 includes the photocatalyst 54 made up of a photocatalytic nanostructured titanium dioxide (TiO_2) film, coating, or membrane deposited using sol-gel. The sol-gel is doped to impart the titanium dioxide (TiO_2) as the photocatalyst 54 that may be activated using visible light and/or an ultraviolet wavelength less than 833 nanometers (e.g., 280-700 nanometer wavelengths) using a 12

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0010] For purposes of description herein the terms "upper," "lower," "right," "left," "rear," "front," "vertical," "horizontal," and derivatives thereof shall relate to the device as oriented in FIG. 1. However, it is to be understood that the device may assume various alternative orientations and step sequences, except where expressly specified to the contrary. It is also to be understood

volt UV LED strip or panel (see FIG. 5B) is provided. In some aspects, the activated filter 50 and corresponding photocatalyst 54 may be activated using an ultraviolet wavelength less than about 400 nm and/or visible light ranging from about 390 nm to about 700 nm.

[0014] Referring now to FIGS. 1A-1D, a variety of different refrigerator environments were studied to determine how bacteria and other particulate matter may be introduced into the storage compartment 22 of the refrigerator 10. Each of the refrigerators 10 is shown having the cabinet 14 with the storage compartment 22 enclosed by the cabinet 14 and a first and second door 18a, 18b. In the first test environment illustrated in FIG. 1A, the introduction of bacterial contamination to the storage compartment 22 was accomplished by positioning a contaminated chicken breast 74 containing many different types of bacteria. The test environment provided in FIG. 1A demonstrated that the bacteria growing on the contaminated chicken breast 74 did not spread to or reach any of plurality of petri dishes 78 proving that refrigerator bacterial contamination is likely not due to food cross-contamination, except for direct food contact.

[0015] In the second test environment illustrated in FIG. 1B, the introduction of bacterial contamination to the storage compartment 22 was accomplished by circulating air from outside the refrigerator 10 by opening and closing the first and second refrigerator doors 18a, 18b. By opening and closing the refrigerator doors 18a, 18b, airborne bacteria 66 was introduced to the storage compartment 22 and was able to contact and grow in the petri dishes 78. The refrigerator 10 in FIG. 1B did not include any air filtration or circulation system. The test environment provided in FIG. 1B demonstrates that bacteria introduced into the refrigerator 10 and corresponding foodstuffs is likely determined by the introduction of airborne bacteria 66 during refrigerator door 18 opening and closing.

[0016] In the third test environment illustrated in FIG. 1C, the introduction of bacterial contamination to the storage compartment 22 was accomplished as described in FIG. 1B, by opening and closing the refrigerator doors 18a, 18b. The additional variable introduced in FIG. 1C includes a standard air filtration system 80 using only a single fan assembly which is currently implemented in many refrigerators. The test environment provided in FIG. 1C demonstrated that the single fan assembly air filtration system had minimal to no noticeable effect on the airborne bacteria 66 introduced into the storage compartment 22 of the refrigerator 10.

[0017] In the fourth test environment illustrated in FIG. 1D, the introduction of bacterial contamination to the storage compartment 22 was accomplished as described in FIGS. 1B and 1C, by opening and closing the refrigerator doors 18a, 18b. The refrigerator 10 in FIG. 1D additionally includes first and second fan assemblies 26, 38, each assembly equipped with circulation fans 46 and at least one activated filter 50 (see FIG. 2) initiated by at least one UV LED 58 (see FIG. 5B). The test environment pro-

vided in FIG. 1D demonstrated that the combination of two fan assemblies 26, 38 using UV activated filters 50 are able to reduce bacterial contamination in the storage compartment 22 by up to 70% more when compared to the environments provided in FIGS. 1B and 1C.

[0018] Referring now to FIG. 2, a partially schematic fragmentary view of the fan assembly 26, 38 is taken from the position marked II in FIG. 1D. As shown, airborne bacteria 66 and/or particulate matter 70 scattered throughout the storage compartment 22 are directed along the air circulation path 62 into one of the two fan assemblies 26, 38. The air circulation path 62 generally flows between the area of the storage assembly 22 and the two fan assemblies 26, 38 using two or more circulation fans 46 in each fan assembly 26, 38. As provided in FIG. 1B, 1C, and 1D, the air introduced into the storage compartment 22 when opening the refrigerator doors 18a, 18b can include airborne bacteria 66 and/or particulate matter 70. Once the refrigerator doors 18a, 18b and corresponding storage compartment 22 are closed, the air circulation path 62 formed by the fan assemblies 26, 38 directs the airborne bacteria 66 and/or particulate matter 70 in through the circulation fans 46 and out through the activated filter 50 coupled to the photocatalyst 54. As the airborne bacteria 66 and/or particulate matter 70 contact the activated filter 50, one or more LEDs 58 (see FIG. 5B) can project UV and/or visible light onto the photocatalysts 54 of the activated filter 50. The photocatalyst 54 is activated by the UV light, which can then kill and/or damage the airborne bacteria 66. The particulate matter 70 can additionally be removed by the activated filter 50. The corresponding or resultant filtered air continues along the air circulation path 62 out through the filter 50 and back into the storage compartment 22 of the cabinet 14. In some aspects, a controller (not shown) drives the circulation fans 46 and LED's 58 (see FIG. 5B) as triggered by a preprogrammed schedule, the opening and closing of the refrigerator doors 18, the detection of odor, bacteria 66, and/or particulate matter 70 using, for example, a bio-sensor, and/or other triggers or factors known by one skilled in the art.

[0019] Referring now to FIG. 3, a rotating isometric view of the fan assemblies 26, 38 is provided. As shown, in some aspects, the fan assemblies 26, 38 include a first intake 86, an exhaust 90, and a second intake 94. The fan assemblies 26, 38 are rotated 180° to show the various structural features and shape of the device according to some aspects of the present disclosure. As illustrated, the fan assemblies 26, 38 each include a rear assembly panel 102 coupled to an assembly cover panel 146 that define the one or more intakes and exhausts in addition to the fixing members used to mount the internal hardware and the fan assemblies to the refrigerator 10, respectively.

[0020] Referring now to FIG. 4A, front and side views of the fan assemblies 26, 38 are provided. In some aspects, the dimensions of the fan assemblies 26, 38 may include a width (X) of about 20 mm to about 60 mm or

about 30 mm to about 50 mm. In some aspects, the width (X) of the fan assembly may be about 30 mm, about 40 mm, about 50 mm. The height (Y) of the fan assembly 26, 38 may range from about 200 mm to about 600 mm or about 300 mm to about 500 mm. In some aspects, the height (Y) of the fan assembly may be about 300 mm, about 350 mm, about 398 mm, about 425 mm, or about 450 mm. The depth (Z) of the fan assembly 26, 38 may range from about 5 mm to about 25 mm or about 10 mm to about 20 mm. In some aspects, the depth (Z) of the fan assembly may be about 10 mm, about 15 mm, or about 20 mm. In some aspects, the height (Y) is 398 mm, the width (Z) is about 40 mm, and the depth (Z) is about 16 mm.

[0021] Referring to FIG. 4B, the front and side views of the cabinet cavity 82 is provided. In some aspects, the dimensions of the cabinet cavity 82 may include a width (a) from about 20 mm to about 60 mm or from about 30 mm to about 50 mm. In some aspects, the width (a) of the cabinet cavity 82 may be about 30 mm, about 40 mm, or about 50 mm. The height (b) of the cabinet cavity 82 may range from about 200 mm to about 600 mm or from about 300 mm to about 500 mm. In some aspects, the height (b) of the cabinet cavity 82 may be about 300 mm, about 350 mm, about 398 mm, about 425 mm, or about 450 mm. The depth (c) of the cabinet cavity 82 may range from about 5 mm to about 25 mm, or from about 10 mm to about 20 mm. In some aspects, the depth (c) of the cabinet cavity 82 may be about 10 mm, about 15 mm, or about 20 mm. In some aspects, the height (b) is 399 mm, the width is about 41 mm, and the depth is about (c) is about 17 mm.

[0022] Referring now to FIG. 5A, a front view of the rear assembly panel 102 is provided according to some aspect of the present disclosure. The rear assembly panel 102 includes a distal portion 106 at each end of the rear assembly panel 102 and a central portion 110. The rear assembly panel 102 further includes one or more cover fixing members 114, two or more fan fixing members 118, a power cable pass through 122 and an assembly fixing member 126. The one or more cover fixing members 114 may be used to couple the assembly cover panel 146 (see FIG. 6A) when used in combination with one or more coupling members. The coupling members 172 (see FIG. 7) may include any means known in the art used for coupling different members together, for example, but not limited to screws, bolts, nails, clips, snaps, and/or ties. The two or more fan fixing members 118 may be used to couple the two or more circulation fans 46 to the rear panel assembly when used in combination with one or more coupling members 172. The assembly fixing members 126 may be used to couple the rear assembly panel 102 to the cabinet cavity 82 of the storage compartment 22. One or more coupling members 172 may be used in combination with the assembly fixing members 126 to position and retain the rear assembly panel 102 in the cabinet cavity 82.

[0023] Referring now to FIG. 5B, a front view of an

assembled rear panel assembly 128 is provided. The assembled rear panel assembly 128 includes the rear assembly panel 102 coupled to the circulation fans 46 positioned at each distal portion 106 of the rear assembly panel 102. In addition, the rear assembly panel 102 is coupled to an LED panel 130 having one or more LEDs 58. The one or more LEDs 58 may project visible light, UV-A light, UV-B light, UV-C light, or a combination thereof onto the photocatalyst 54. The assembled rear assembly panel 128 is simplified by being able to weld both an external power supply cable 134 and device wiring 138 to LED conductive tracks 142 of the LED panel 130 and the circulation fans 46. Construction and wiring in this manner allows the assembled rear panel assembly 128 to be achieved using only six tin solders. In some aspects, one or more LED panels 130 having one or more UV LEDs 58 and/or white light LEDs 58 may be coupled and wired into the rear assembly panel 102. For example, in some aspects, the assembled rear panel assembly 128 may include one LED panel 130 having white light LEDs for ambient lighting in the refrigerator 10 and a second LED panel 130 having UV LEDs 58 used to activate the photocatalyst 54 of the activated filter 50 (see FIG. 2). The number of LED panels 130 and/or corresponding LEDs (both UV and other wavelengths) are not meant to be limiting and may be varied depending on the final design and corresponding functionality of the refrigerator 10.

[0024] Referring now to FIG. 6A, a rear isometric view of the assembly cover panel 146 is provided. The assembly cover panel 146 includes two distal portions 106 and the central portion 110. The assembly cover panel 146 additionally includes a cover fixing member 150, a first distal vent 154, a second distal vent 158, and a central vent 162. The assembly cover panel 146 also includes two or more side panels 166 to help couple and position the assembly cover panel 146 to the assembled rear panel assembly 102 (see FIG. 5B) in addition to forming side walls.

[0025] Referring now to FIG. 6B, a rear view of the assembly cover panel 146 is illustrated coupled to the activated filter 50. In some aspects, the first and second distal vents 154, 158 may have a square shape with a height and width designed to match the size, intake and/or pull of the circulation fans 46. In some aspects, the height and width of the first and second distal vents 154, 158 may range from about 20 mm to about 250 mm, from about 20 mm to about 150 mm, or from about 20 mm to about 50 mm. In some aspects, the height and width of the first and second distal vents 154, 158 may be about 50 mm, about 40 mm, or about 30 mm. The length of the activated filter may range from about 100 mm to about 130 mm. In some aspects, the activated carbon filter may have a length of about 115 mm and a width of about 38 mm. The shape and associated dimensions of the distal vents 154, 158 and central filter vent 162 are not meant to be limiting and may be changed to meet the desired design and properties of the refrigerator

10.

[0026] Referring now to FIG. 7, an exploded side view of the fan assemblies 26, 38 and corresponding refrigeration liner 82 is provided. As illustrated, the assembly cover panel 146 is coupled to the activated filter 50. In some aspects, the activated filter 50 may include a framing member 170 used to stabilize the edges of the activated filter 50 and facilitate coupling of the activated filter 50 to the assembly cover panel 146. A first circulation fan 46a and a second circulation fan 46b are coupled to the rear assembly panel 102 through the fan fixing members 118 and coupling member 172 in addition to the LED panel 130 including the plurality of LEDs 58. The side panels 166 and end side panels 174 are positioned with respect to each other to butt up against each other to form a uniform side wall for the fan assemblies 26, 38. The fan assemblies 26, 38 are then positioned into the cabinet cavity 82 where the fan assembly 26, 38 may be positioned flush with the interior surface 30 of the cabinet walls 34, 42 or refrigerator doors 18a, 18b (see FIG. 1D). In some aspects, the cabinet cavity 82 may be coupled to a flat interior surface 30 on the cabinet walls 34, 42 where the installed fan assemblies 26, 38 would stick out from the interior surface 30 to form a ledge or protrusion from the cabinet walls 34, 42. In other aspects, the cabinet cavity 82 may be a cutout or indentation in the cabinet walls 34, 42 where the interior surface 30 forms an indentation formed to receive the fan assemblies 26, 38 to form an even or flat surface on the cabinet walls 34, 42. In some aspects, the first and second fan assemblies 26, 38 are each positioned in the cabinet cavity 82 on the interior surface 30 of the first and second cabinet walls 34, 42. In other aspects, the first and second fan assemblies 26, 38 may each be positioned on a front lip or edge of the cabinet cavity 82 on the interior surface 30 of the first and second cabinet walls 34, 42 configured to direct the air circulation path 62 (see FIG. 2) and corresponding fresh outside air into the first and second fan assemblies 26, 38 before entering the cabinet cavity 82.

[0027] The activated filter 50 may be formed by coating, coupling, and/or adsorbing the photocatalyst 54 onto a filter. In some aspects, the filter or filter membrane may be made from a polymer fiber, a glass fiber, a ceramic fiber, or a combination thereof. The polymer fiber may include polyethylene (PE), polypropylene (PP), polyester, polyamide, polyvinylpyrrolidone (PVPP), polystyrene, polyimides, naturally occurring polymers, thermoplastics, thermosets, or combinations thereof. In some aspects, the polymer fiber used to make the filter is polyethylene or a blend of polyethylene. In some aspects, wherein the activated filter 50 is a polymeric filter coupled to a UV activated photocatalyst. The photocatalyst 54 and UV activated photocatalyst may include titanium dioxide (TiO₂), zinc oxide (ZnO), tin oxide (SnO₂), cesium oxide (CeO₂), zinc titanium dioxide (ZnTiO₂), copper titanium dioxide (CuTiO₂), silver titanium dioxide (AgTiO₂), iron titanium dioxide (FeTiO₂), or combinations thereof. In some aspects, the photocatalyst 54 includes

titanium dioxide (TiO₂). The photocatalyst 54 may be coated, coupled, and/or adsorbed onto the filter using a variety of techniques including, for example, a sol gel approach. In some aspects, the activated filter 50 includes a polyethylene filter having a photocatalytic titanium dioxide (TiO₂) film deposited on its surface forming a nanostructured TiO₂ layer using sol gel. In other aspects, the activated filter 50 may further include an activated carbon and/or carbon black particles used to help filter the polluted air. In some aspects, the activated filter 50 is an activated carbon filter coupled to a titanium oxide (TiO₂) doped sol gel. The TiO₂ or other photocatalyst 54 doped sol gel may include any sol gel or sol gel technique or method known in the art. In some aspects, the rear assembly panel 102 and the assembly cover panel 146 may both be coupled to the photocatalyst 54 to provide an activated surface. The photocatalyst 54 may be operatively coupled to the rear assembly panel 102 and/or the assembly cover panel 146 using sol gel techniques or any other coating applications known by one skilled in the art (e.g., spin coating, solvent evaporation, spray coating, brushing, etc.).

[0028] The LEDs 58 mounted on the LED panel 130 may be positioned or spaced apart from the activated filter 50 by from about 0.5 cm to about 4 cm or from about 1 cm to about 3 cm. In some aspects, the LEDs 58 may be spaced apart from the activated filter 50 by about 0.5 cm, about 1 cm, about 1.5 cm, about 2 cm, about 2.5 cm, about 3 cm, about 3.5 cm, or about 4 cm. In some aspects, the LED panel 130 and corresponding LEDs 58 may be mounted or positioned directly in front of the activated filter 50 having the photocatalyst 54. In some aspects, the LEDs 58 generate UV light that can kill bacteria without the use of the photocatalyst 54. In other aspects, the photocatalyst 54 is activated when exposed to UV and/or visible light generated and projected by the LEDs 58 where the activated photocatalyst 54 may be able to kill and/or damage the bacteria. In some aspects, the LEDs 58 can project a wavelength from about 100 nm to about 405 nm, from about 250 nm to about 405 nm, from about 280 nm to about 405 nm, from about 315 nm to about 405 nm, from about 365 nm to about 405 nm, or from about 395 nm to about 405 nm. In some aspects, the plurality of LEDs 58 are UV-A LEDs that are positioned to project UV-A light on the activated filter 50. In other aspects, the plurality of LEDs 58 are UV-B LEDs that are positioned to project UV-B light on the activated filter 50. In still other aspects, the plurality of LEDs 58 are UV-C LEDs that are positioned to project UV-C light on the activated filter 50. In some aspects, the plurality of LEDs 58 are positioned to project UV-A light (315 nm to 400 nm), UV-B light (280 nm to 315 nm), UV-C light (100 nm to 280 nm), or a combination thereof on the activated filter 50. In other aspects, the LEDs 58 may project UV-A, UV-B, UV-C, or a combination of light thereof and/or visible light in the range from about 400 nm to about 700 nm. In still other aspects, the LEDs 58 may project visible light in the range from about 400 nm to about 700 nm.

[0029] As will be provided in more detail in the description for FIGS. 9A-9C, two or more fan assemblies 26, 38 may be required to provide the air circulation path 62 necessitated to remove a higher percentage of airborne bacteria 66, particulate matter 70, volatile organic compounds (VOCs), and molds from the storage compartment 22 of the refrigerator 10. As provided in FIGS. 1C, 9B, and 9C, the use of just one circulation fan or fan assembly may be unable to provide an air circulation path that can effectively eliminate enough of the airborne bacteria 66 and particulate matter 70. In some aspects, two or more fan assemblies 26, 38 may be positioned on opposing first and second cabinet walls 34, 42, positioned on the first and second doors 18a, 18b, or positioned on any two opposing interior surfaces where the first and second fan assemblies 26, 38 work in a complementary manner to provide the improved air circulation path 62. In some aspects, the first and second cabinet walls 34, 42 are opposing walls or walls that are facing each other to complementarily circulate the air present in or coming into the storage compartment 22. The air circulation path 62 may better direct the airborne bacteria 66, particulate matter 70, volatile organic compounds (VOCs), and molds into the first and second fan assemblies 26, 38 to be filtered. In some aspects, the first cabinet wall 34 opposes the second cabinet wall 42. In some aspects, the air circulation path 62 is configured to direct bacteria throughout the central area of the storage compartment 22

[0030] Unlike the limited filtering ability provided using the single standard filtration system 80 (see FIG. 1C), the combination of the first and second fan assemblies 26, 38 are configured to provide the air circulation path 62 that directs the airborne bacteria 66, particulate matter 70, volatile organic compounds (VOCs), and/or molds simultaneously or contemporaneously into the fan assemblies 26, 38 using the two or more circulation fans 46 to direct the polluted air through the activated filter 50 irradiated by UV and/or visible light projected from the LEDs 58 to filter and clean the polluted air to circulate filtered air into the storage compartment 22 of the refrigerator 10. In some aspects, the two or more circulation fans 46 are configured to direct the air circulation path 62 in through the two or more circulation fans 46 and out through the activated filter 50 where the air circulation path 62 is configured to direct bacteria positioned in the central area of the storage compartment 22 into the first and second fan assemblies 26, 38.

[0031] Although the various aspects of the fan assemblies 26, 38 disclosed herein generally direct the air circulation path 62 into the fan assemblies 26, 38 using the two or more circulation fans 46, in other aspects, the two or more circulation fans 46 are configured to direct the air circulation path 62 in through the activated filter 50 and out through the two or more circulation fans 46. The reversal of the air circulation path 62 is considered to be within the scope of the disclosure of the present invention.

[0032] In some aspects, the first and second fan as-

semblies 26, 38 are able to provide at least a 50 % microbial reduction in one minute, at least a 50 % microbial reduction in three minutes, or at least a 50 % microbial reduction in ten minutes. In other aspects, the first and second fan assemblies 26, 38 are able to provide at least a 60 % microbial reduction in one minute, at least a 60 % microbial reduction in three minutes, or at least a 60 % microbial reduction in ten minutes. In still other aspects, the first and second fan assemblies 26, 38 are able to provide at least a 70 % microbial reduction in one minute, at least a 70 % microbial reduction in three minutes, or at least a 70 % microbial reduction in ten minutes. In other aspects, the first and second fan assemblies 26, 38 are able to provide at least an 80 % microbial reduction in one minute, at least an 80 % microbial reduction in three minutes, or at least an 80 % microbial reduction in ten minutes.

[0033] Referring now to FIG. 8A, a front view of an alternative aspect of the fan assemblies 26, 38 is provided. The fan assemblies 26, 38, according to other aspects of the current disclosure, may include the first intake 86, a first exhaust 90a, the second intake 94, a second exhaust 90b, and a third intake 178. In some aspects, the number of intakes and the number of exhausts may be limited to the number of circulation fans 46 and activated filters 50 incorporated into the fan assembly 26, 38 based on the design and/or final air circulation properties desired for the refrigerator 10. In some aspects, the number of intakes may be two, three, four or more while the number of exhausts may include one, two, three, four, or more where the intakes and exhausts may be positioned with respect to each other in any combination.

[0034] Referring now to FIG. 8B, an exploded side view of the fan assemblies 26, 38 provided in FIG. 8A and corresponding refrigeration liner 82 is provided. As illustrated, the assembly cover panel 146 is coupled to two activated filters 50a, 50b having framing members to stabilize the edges and facilitate coupling of the activated filters 50a, 50b to the assembly cover panel 146. The assembly cover panel 146 includes a first fan vent 154, a first filter vent 162a, a second fan vent 158, a second filter vent 162b, and a third filter vent 182. The first circulation fan 46a, second circulation fan 46b, and a third circulation fan 46c are coupled to the rear assembly panel 102 using coupling members 172 in addition to a first LED panel 130a having a plurality of white light LEDs 186. In addition, a second LED panel 130b having the plurality of UV LEDs 58 is also positioned on the rear panel assembly 102 to project UV light on the photocatalyst 54 of the activated filters 50a, 50b. The side panels 166 and end side panels 174 are positioned up against each other to form solid siding portions for the fan assemblies 26, 38. The fan assemblies 26, 38 may be then positioned into the cabinet cavity 82 where the fan assembly 26, 38 may be positioned flush with the interior surface 30 of a cabinet wall 34, 42 or refrigerator doors 18a, 18b.

[0035] According to another aspect of the present dis-

closure, an air purifying fan assembly 26 is provided. The air purifying fan assembly 26 includes the rear assembly panel 102 and the assemble cover panel 146. The assemble cover panel 146 includes one or more air intakes 86, 94 and one or more air exhausts 90a, 90b; one or more circulation fans 46 positioned inside the rear assembly panel 102 and the assemble cover panel 146 and adjacent to the one or more air intakes 86, 94 or one or more air exhausts 90a, 90b; one or more activated filters 50 having a sol gel photocatalyst 54 and the activated carbon. The activated filter 50 is positioned in line or directly across from the one or more air exhausts and one or more LEDs 58 positioned to project light on the activated filter 50.

[0036] It is understood that the descriptions outlining and teaching the first and second fan assemblies 26, 38 previously discussed, which can be used in any combination, apply equally well to the air purifying fan assembly 26 described herein.

EXAMPLES

[0037] The following examples and their corresponding data represent certain non-limiting examples of the first and second fan assemblies 26, 38 used in conjunction with each other to effectively filter air in the storage compartment 22 of the refrigerator 10.

Materials

[0038] All chemicals, bacteria, growth media, and other constituents were obtained from commercial suppliers and used as provided.

[0039] The antibacterial refrigerator 10 and its corresponding air purifying assemblies defined by the fan assemblies 26, 38 and/or the air purifying duct assembly 192 are designed to remove contaminants such as odor, toxic particles, and pathogens. Examples of key substances that are typically removed through this air-treatment process include parasites, bacteria, algae, viruses, fungi, ethylene, and other food related chemical pollutants.

Air Circulation and Fan Positioning Examples

[0040] Referring now to FIGS. 9A-9C, a description of the experimental set up for the nebulization of an inoculum solution using the fan assemblies 26, 38 for air filtration in the storage compartment 22 is provided. The inoculum solution used in the experiments illustrated in FIG. 9A includes a microbial-loaded saline solution (50-70 ml) recovered during hand washing procedures. To quantify the overall microbial load of the test inoculum, the count of viable microorganisms was determined by means of the pour plate culture method. Briefly, the number of viable microorganisms was counted on Luria-Bertani broth (LB) agar petri dishes ($\theta = 60$ mm) after serial ten-fold dilutions of the test inoculum suspensions

and plating. Plating was performed in duplicate, and the number of viable microorganisms was determined according to the following equation: $N = (C \times D) / V$ where N = number of viable bacteria per ml; C = average plate count for the duplicate plates (e.g., number of colony forming units, CFU, determined in each LB-agar plate); D = dilution factor for the plate counted; and V = volume of test inoculum (in ml).

[0041] As illustrated in FIG. 9A, the inner compartment of a refrigerator (Whirlpool, BLFV8121W model) and the antibacterial device were first cleaned to remove any gross contamination using a quaternary benzyl ammonium disinfectant where the same cleaning procedure was performed on the storage compartment 22 in between each experiment. Following the cleaning procedure, the antibacterial device was placed inside the refrigerator and the refrigerator was left to equilibrate at 40°C for at least 24 hours. Before nebulization of the inoculum solution was provided, 12 sterile LB-agar petri dishes 78 ($\theta = 60$ ml, $N = 12$) were placed inside the refrigerator compartment. The experiments included the nebulization of 450 microliters (μ L) of inoculum inside the refrigerator through a small hole made on the front wall of the refrigerator door ($\theta = 1.2$ cm). Immediately upon the nebulization of the inoculum solution, a test air filtration device 190 was switched on and kept running for a variety of different time periods (e.g., 1 min, 3 min, 10 min) after a microbial nebulization. Control experiments were carried out in the same conditions, but the test air filtration device 190 was not activated. In each of the experiments, the LB-agar petri dishes 78 were closed about 10 minutes after the microbial nebulization and incubated for the first 24 hrs at 37°C, and then for an additional 48 hrs at room temperature (RT). The number of viable microorganisms was then counted on LB-agar petri dishes. All of the experiments noted were performed in triplicate. Data was normalized with respect to the number of viable counts and control samples (CTRL, e.g., air filtration device turned off), considering the number of microorganisms in such condition as 100%. Results are expressed as mean \pm standard deviation (SD).

[0042] Referring now to FIG. 9B, the distribution results of the microbial population measured in colony forming units (CFU) for the cultured control experiments are provided. A homogeneous distribution was found for each respective row, which seemed to be dependent on the distance from the nebulization inlet port and/or the test air filtration device 190. When the test air filtration device 190 was permitted to run for longer durations, the number of microorganisms decreased from about 50 % eliminated to about 75% eliminated after one minute, and this decrease in CFU was maintained over time. This corresponding decrease was shown to be at least partly dependent on the distance from the test air filtration device 190. The row of LP-agar petri dishes 78 positioned closest to the test air filtration device 190 (Row 4) contained the highest microbial population relative to Rows 1-3

while lowest microbial population was observed in the row furthest from the test air filtration device 190 (Row 1). The uniform difference and disparity in microbial populations based on the difference in distance between the corresponding rows and the test filtration device 190 supports the need for two or more air filtration devices 26, 38 as described herein.

[0043] Referring now to FIG. 9C, the viable CFU counts for each of the four rows (Rows 1-4) were averaged and plotted against time as the test air filtration device 190 was operated to filter the storage compartment 22. Consistent with the data provided in FIG. 9B, when the filtration device was run for a longer period of time (e.g., 10 min vs. 3 min vs 1 min), the number of microorganisms decreased from about 50 to about 75% already after one minute and was generally maintained over the longer periods of time. Again consistent with the data provided in FIG. 9B, the decrease in CFU counted is dependent on the distance from the test air filtration device 190 where the decrease in CFU was more pronounced or greater at distances further away from the test air filtration device 190.

Filter Reduction of Microbial Populations

[0044] Referring now to FIG. 10, an assessment of the *in vitro* time-dependent reduction of a microbial population after exposure to different activated filters 50 having the photocatalyst 50 including a TiO₂ doped sol gel. The antibacterial effectiveness of a variety of filters was assessed using three different filters: 1) Filter 1, a polymeric filter having no photocatalyst 50 incorporated, 2) Filter 2, a polymeric filter treated with a first TiO₂ doped sol gel as the photocatalyst 50; and 3) Filter 3, a polymeric filter treated with a second TiO₂ doped sol gel as the photocatalyst 50. The activated filters 50 were put in contact with *E. coli* Gram-negative bacteria that, together with *Pseudomonas* and *Salmonellas*, are well-known food contaminants. All the experiments were performed according to the ASTM E 2315 and ISO 22196 international standards with minor modifications as described herein. For example, the bacterial load was increased in order to mimic the effect of the long-term exposure to food contaminants. The antibacterial activity of the devices was assessed at 4°C and at some sampling intervals (i.e., 30 min, 60 min, 120 min, and 19 h). The results demonstrated that Filters 2 and 3 were found fully effective in killing all detectable bacteria within 30 minutes of incubation. In addition, antimicrobial efficiency was also displayed for Filter 1 although a slower kinetic pattern was observed relative to Filters 2 and 3.

[0045] The study was performed using three different air filters/devices: 1) Filter 1; 2) Filter 2; and 3) Filter 3. Disc-shaped specimens ($\varnothing = 15$ mm, surface area = 1.75 cm²) were cut from each kind of polymeric filter and transferred into a sterile 24-well plate.

[0046] An aliquot of Gram-negative *E. coli* (strain JM109, cat. 53323, ATCC) was transferred onto a sterile

Lysogeny broth agar (LB-A) plate and incubated at 37°C for 20 hrs to allow bacterial colonies to grow. After incubation, using a sterile inoculating loop, a single colony was transferred into a 50 mL polypropylene tube (Corning) filled with 5 mL of sterile LB liquid growth medium and incubated overnight (ON) at 37°C under shaking, to produce sufficient microbial suspension. The number of bacteria within the microbial suspension was roughly estimated by measuring the optical density of the suspension at $\lambda = 600$ nm (OD_{600nm}) by means of a Nanodrop 2000 spectrophotometer (Thermo Scientific). Afterwards, the inoculum was prepared diluting the microbial suspension in sterile LB to an OD_{600nm} = 0.02. Bacteria were next allowed to grow until they reached an OD_{600nm} = 0.6 (exponential growth phase). The inoculum was finally centrifuged for 10 min at 4,000 g, washed once in sterile deionized water (dH₂O), pelleted again and the cells suspended in dH₂O to give a bacterial concentration of $\approx 5 \times 10^8$ bacteria/mL.

[0047] Following a pre-incubation at 4°C, the test specimens were brought into contact with the inoculum suspension. The experiments were carried out according to the ASTM E 2315 (Assessment of Antimicrobial Activity Using a Time-Kill Procedure) [1] and ISO 22196 (Measurement of antibacterial activity on plastics and other non-porous surfaces) [2] standards, with slight modifications that are in the 10³ times higher bacterial load and the temperature at which the experiments were performed (e.g., 4 °C instead of 35 ± 1 °C).

[0048] Each test specimen (Filter 1 samples, n = 3; Filter 2, n = 2; Filter 3, n = 2) was inoculated with 1 mL of the bacterial inoculum and incubated at 4°C for different durations (i.e., 30 min, 60 min, 120 min and 19 h). During the experiments, the Filters 2 and 3 having the photocatalyst 54 added using a sol gel approach underwent UV irradiation (i.e., the final device setup). Bacteria inoculated in wells without any filter were used as positive controls (untreated bacteria).

[0049] At different time intervals, a 30 μ L aliquot of bacterial suspension kept in contact with the test specimens was removed from each well, serially diluted in sterile dH₂O (1:10, 1:100, 1:1,000), plated onto LB-AP60 plates and incubated ON at 37°C to allow bacterial colonies to grow. After incubation, the number of viable bacteria was evaluated by counting the colony forming units (CFU) grown on agar plates. The number of viable cells was standardized to the plated area (cm²) and the dilution factor. Finally, data were normalized with respect to the number of viable cells in control samples at each time step, considering the number of untreated bacteria as 100 %. Results were expressed as mean \pm standard error of means (SEM).

[0050] The antibacterial effectiveness of the three filters/devices was evaluated using the Time-Kill procedure, assessed by measuring the reduction of the microbial population over time. The results are illustrated in FIG. 10. Upon analyzing the graph, the highest antimicrobial activity was observed for the Filter 2 and 3 acti-

vated filters 50 having the photocatalyst 54. After 30 min of incubation for Filters 2 and 3, no viable bacteria was detected. As the maximum efficiency was found at the shortest duration, this antibacterial behavior was maintained thereafter for Filters 2 and 3. A time-killing effect was observed for the Filter 1 samples, although when in contact with this kind of filter having no active photocatalyst incorporated, the number of viable cells decreased up to $\approx 40\%$ already after 30 min of incubation, and it dropped to 5 % after 120 min. After 19 hrs of incubation, only 0.2 % of bacteria were viable.

Reduction of Volatile Organic and Particulate Matter Examples

[0051] Referring now to FIGS. 11A and 11B, a test monitoring the Total Solid Particulate (TSP) and Volatile Organic Compounds (VOC) in a confined environment that is artificially polluted to evaluate the effectiveness of different decontamination devices for household refrigerators is illustrated.

[0052] The following five purification and air filtration devices were tested: 1) a Static control environment using no purification and/or air filtration device; 2) Ozonator; 3) Filter 1, a polymeric filter having no photocatalyst 50 incorporated, 4) Filter 2 activated using UV LEDs, a polymeric filter treated with a first TiO_2 doped sol gel as the photocatalyst 50; and 5) Filter 3 activated using UV LEDs, a polymeric filter treated with a second TiO_2 doped sol gel as the photocatalyst 50.

[0053] Tests were performed in a Glove Box (100 liters per volume) that was polluted by burning about $\frac{1}{4}$ of a Marlboro cigarette that was able to rapidly generate a large amount of TSP and VOC. The following testing procedure was used: ignition of cigarette, immediate closure of the Glove Box, cigarette combustion, waiting for 15 minutes, switching on the Ozonator or filter fan, monitoring of up to 120 minutes of TSP content using an Aerocet 531, Met One Instruments, Inc., or monitoring up to 120 minutes of VOC content using a DSIAQ-PLUS-PPC, Gray Wolf Sensing Solutions.

[0054] Referring still to FIGS. 11A and 11B, the static control and Ozonator treatments each were able to reduce the VOC by up to 15 % over 120 minutes and had no significant decrease in the TSP during the duration of the experiment. The Filter 1 polymeric filter having no photocatalyst 50 incorporated was able to reduce the VOC by up to about 20 % over 120 minutes and the TSP by up to 40 % over 120 minutes. The Filter 2 activated with UV LEDs using a polymeric filter treated with a first TiO_2 doped sol gel as the photocatalyst 50 was able to reduce the VOC by up to about 20 % over 120 minutes and the TSP by up to 50 % over 120 minutes. The Filter 3 activated with UV LEDs using a polymeric filter treated with a first TiO_2 doped sol gel as the photocatalyst 50 was able to reduce the VOC by up to about 20 % over 120 minutes and the TSP by up to 50 % over 120 minutes.

[0055] In some aspects, the activated filter 50 coupled

to the photocatalyst 54 (e.g. TiO_2) that is activated using UV LEDs 58 may be able to reduce the VOCs in the storage compartment 22 of the refrigerator 10 by up to about 10 %, about 15 %, about 20 %, or about 25 % in 40 minutes, 60 minutes, 80 minutes, 100 minutes, or 120 minutes or less. In some aspects, the activated filter 50 coupled to the photocatalyst 54 (e.g. TiO_2) that is activated using UV LEDs 58 may be able to reduce the TSP in the storage compartment 22 of the refrigerator 10 by up to about 10 %, about 15 %, about 20 %, about 25 %, about 30 %, about 35 %, about 40 %, or about 45 %, in 40 minutes, 60 minutes, 80 minutes, 100 minutes, or 120 minutes or less.

[0056] According to one aspect of the present disclosure, a refrigerator includes a cabinet coupled to one or more doors forming a storage compartment. A first fan assembly is positioned on an interior surface of a first cabinet wall. A second fan assembly is positioned on the interior surface of a second cabinet wall. The first and second fan assemblies each include two or more circulation fans. A filter is coupled to a photocatalyst to form an activated filter. A plurality of LEDs are positioned to project light on the activated filter. An air circulation path is configured to direct airborne bacteria and particulate matter within the storage compartment contemporaneously into the first and second fan assemblies using the two or more circulation fans and circulate filtered air into the storage compartment through the activate filter disposed in the air circulation path.

[0057] According to another aspect of the present disclosure, a plurality of LEDs project visible light, UV-A light, UV-B light, UV-C light, or a combination thereof onto a photocatalyst.

[0058] According to another aspect of the present disclosure, an activated filter is an activated carbon filter coupled to a titanium oxide (TiO_2) doped sol gel.

[0059] According to another aspect of the present disclosure, an activated filter is a polymeric filter coupled to a UV activated photocatalyst.

[0060] According to another aspect of the present disclosure, a second cabinet wall opposes a first cabinet wall.

[0061] According to another aspect of the present disclosure, two or more circulation fans are configured to direct an air circulation path in through the two or more circulation fans and out through an activated filter.

[0062] According to another aspect of the present disclosure, two or more circulation fans are configured to direct an air circulation path in through an activated filter and out through the two or more circulation fans.

[0063] According to another aspect of the present disclosure, first and second fan assemblies are each positioned in a cabinet cavity on an interior surface of first and second cabinet walls.

[0064] According to another aspect of the present disclosure, airborne bacteria and particulate matter are reduced by at least 60% within one minute.

[0065] According to another aspect of the present dis-

closure, a photocatalyst is titanium dioxide (TiO₂).

[0066] According to another aspect of the present disclosure, a refrigerator includes a cabinet coupled to one or more doors. The cabinet includes a storage compartment. Two or more fan assemblies are positioned on an interior surface of the cabinet, the one or more doors, or a combination thereof. The fan assemblies each comprise one or more circulation fans. A photocatalyst is coupled to one or more filters forming an activated filter. A plurality of LEDs are positioned to project light on the light activated photocatalyst. An air circulation path is configured to direct airborne bacteria and particulate matter within the storage compartment contemporaneously into the two or more fan assemblies using the one or more circulation fans and circulate filtered air into the storage compartment through the activate filter disposed in the air circulation path.

[0067] According to another aspect of the present disclosure, a plurality of LEDs project visible light, UV-A light, UV-B light, UV-C light, or a combination thereof onto a photocatalyst.

[0068] According to another aspect of the present disclosure, two or more fan assemblies are positioned on two or more interior surfaces of opposing cabinet walls or proximate an edge of a cabinet.

[0069] According to another aspect of the present disclosure, one or more circulation fans are configured to direct an air circulation path in through one or more intakes of a fan assembly and out through one or more exhausts.

[0070] According to another aspect of the present disclosure, one or more circulation fans includes two, three, or four circulation fans.

[0071] According to another aspect of the present disclosure, airborne bacteria and/or odor are reduced by at least 60% within ten minutes.

[0072] According to another aspect of the present disclosure, an antibacterial fan assembly includes a rear assembly and an assembly cover panel. The assembly cover panel includes one or more air intakes and one or more air exhausts. One or more circulation fans are positioned between the rear assembly panel and the assembly cover panel. An activated filter has a photocatalyst and an activated carbon. The activated filter is positioned in circulation with the one or more air exhausts. One or more LEDs are positioned to project light on the activated filter.

[0073] According to another aspect of the present disclosure, LEDs are positioned to illuminate an activated filter using a UV wavelength from about 280 nm to about 405 nm.

[0074] According to another aspect of the present disclosure, one or more circulation fans are configured to direct an air circulation path configured to direct airborne bacteria and particulate matter within a storage compartment contemporaneously into two or more antibacterial fan assemblies using the one or more circulation fans and circulate filtered air into the storage compartment

through an activated filter disposed in the air circulation path.

[0075] According to another aspect of the present disclosure, a photocatalyst is a titanium oxide (TiO₂) doped sol gel.

[0076] According to another aspect of the present disclosure, first and second fan assemblies each include a rear assembly panel coupled to an assembly cover panel.

[0077] According to another aspect of the present disclosure, an assembly cover panel defines one or more intakes and one or more exhausts or a fan assembly.

[0078] According to another aspect of the present disclosure, first and second fan assemblies are configured to provide at least a 50 % microbial reduction in one minute.

[0079] According to another aspect of the present disclosure, first and second fan assemblies are configured to provide at least a 50 % microbial reduction in ten minutes.

[0080] It will be understood by one having ordinary skill in the art that construction of the described device and other components may not be limited to any specific material. Other exemplary aspects of the device disclosed herein may be formed from a wide variety of materials, unless described otherwise herein.

[0081] For purposes of this disclosure, the term "coupled" (in all of its forms, couple, coupling, coupled, etc.) generally means the joining of two components (electrical or mechanical) directly or indirectly to one another. Such joining may be stationary in nature or movable in nature. Such joining may be achieved with the two components (electrical or mechanical) and any additional intermediate members being integrally formed as a single unitary body with one another or with the two components. Such joining may be permanent in nature or may be removable or releasable in nature unless otherwise stated.

[0082] It will be understood that any described processes or steps within described processes may be combined with other disclosed processes or steps to form structures within the scope of the present device. The exemplary structures and processes disclosed herein are for illustrative purposes and are not to be construed as limiting.

[0083] It is also important to note that the construction and arrangement of the elements of the device as shown in the exemplary embodiments is illustrative only. Although only a few embodiments of the present innovations have been described in detail in this disclosure, those skilled in the art who review this disclosure will readily appreciate that many modifications are possible (e.g., variations in sizes, dimensions, structures, shapes and proportions of the various elements, values of parameters, mounting arrangements, use of materials, colors, orientations, etc.) without materially departing from the novel teachings and advantages of the subject matter recited. For example, elements shown as integrally formed may be constructed of multiple parts or elements shown as multiple parts may be integrally formed,

the operation of the interfaces may be reversed or otherwise varied, the length or width of the structures and/or members or connector or other elements of the system may be varied, the nature or number of adjustment positions provided between the elements may be varied. It should be noted that the elements and/or assemblies of the system may be constructed from any of a wide variety of materials that provide sufficient strength or durability, in any of a wide variety of colors, textures, and combinations. Accordingly, all such modifications are intended to be included within the scope of the present innovations. Other substitutions, modifications, changes, and omissions may be made in the design, operating conditions, and arrangement of the desired and other exemplary embodiments without departing from the spirit of the present innovations.

[0084] It is also to be understood that variations and modifications can be made on the aforementioned structure without departing from the concepts of the present invention, and further it is to be understood that such concepts are intended to be covered by the following claims unless these claims by their language expressly state otherwise.

[0085] The above description is considered that of the illustrated embodiments only. Modifications of the device will occur to those skilled in the art and to those who make or use the device. Therefore, it is understood that the embodiments shown in the drawings and described above is merely for illustrative purposes and not intended to limit the scope of the device, which is defined by the following claims as interpreted according to the principles of patent law, including the Doctrine of Equivalents.

Claims

1. A refrigerator (10) comprising:

a cabinet (14) to which one or more doors (18) forming a storage compartment (22) therewith are coupled;
 a first fan assembly (26) positioned on an interior surface (30) of a first cabinet wall (34);
 a second fan assembly (38) positioned on the interior surface (30) of a second cabinet wall (42) wherein the first and second fan assemblies (26, 38) each comprise:

one or more circulation fans (46);
 a filter coupled to a photocatalyst (54) to form an activated filter (50); and
 a plurality of LEDs (58) positioned to project light onto said activated filter (50); and

an air circulation path (62) configured to direct airborne bacteria (66) and particulate matter (70) within the storage compartment (22) contemporaneously into the first and second fan as-

semblies (26, 38) using the one or more circulation fans (46) and circulate filtered air into the storage compartment (22) through the activated filter (50) disposed in the air circulation path (62).

- 5 2. The refrigerator (10) according to claim 1, wherein the plurality of LEDs (58) project at least one of visible light, UV-A light, UV-B light, and UV-C light onto the photocatalyst (54).
- 10 3. The refrigerator (10) according to claim 1 or claim 2, wherein the activated filter (50) is an activated carbon filter coupled to a titanium oxide (TiO₂) doped sol gel.
- 15 4. The refrigerator (10) according to claim 1 or claim 2, wherein the activated filter (50) is a polymeric filter coupled to a UV activated photocatalyst.
- 20 5. The refrigerator (10) according to any one of claims 1-4, wherein the second cabinet wall (42) opposes the first cabinet wall (34).
- 25 6. The refrigerator (10) according to any one of claims 1-5, wherein the one or more circulation fans (46) are configured to direct the air circulation path (62) in through the one or more circulation fans (46) and out through the activated filter (50).
- 30 7. The refrigerator (10) according to any one of claims 1-6, wherein the one or more circulation fans (46) are configured to direct the air circulation path (62) in through the activated filter (50) and out through the one or more circulation fans (46).
- 35 8. The refrigerator (10) according to any one of claims 1-6, wherein the one or more circulation fans (46) are configured to direct the air circulation path (62) in through one or more intakes (86, 94) of the respective fan assembly (26, 38) and out through one or more exhausts (90a, 90b).
- 40 9. The refrigerator (10) of claim 8, wherein each of the first and second fan assemblies (26, 38) includes a rear assembly panel (102) coupled to an assembly cover panel (146).
- 45 10. The refrigerator (10) of claim 9, wherein the assembly cover panel (146) defines the one or more intakes (86, 94) and the one or more exhausts (90a, 90b) of the respective fan assembly (26, 38).
- 50 11. The refrigerator (10) according to any one of claims 1-10, wherein the first and second fan assemblies (26, 38) are each positioned in a cabinet cavity (82) on the interior surface (30) of the first and second cabinet walls (34, 42).

12. The refrigerator (10) of any one of claims 1-11, wherein the LEDs (54) are positioned to illuminate the activated filter (50) using a UV wavelength from about 280 nm to about 405 nm.

5

13. The refrigerator according to any one of claims 1-12, wherein the one or more circulation fans (46) include two, three, or four circulation fans (46).

10

15

20

25

30

35

40

45

50

55

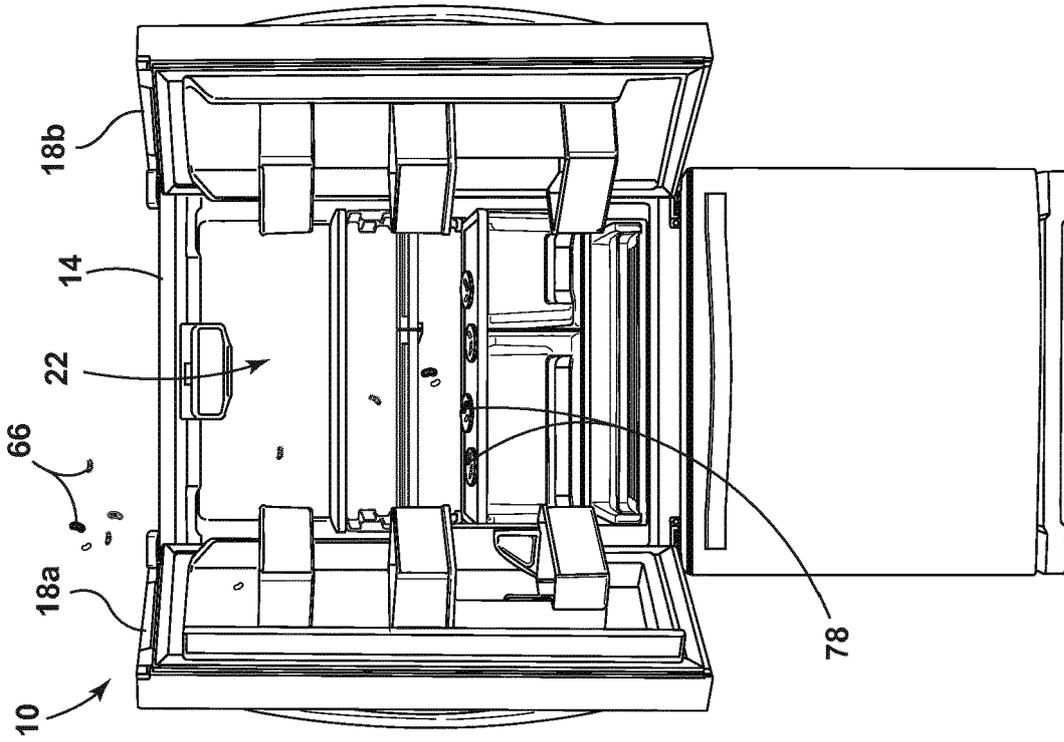


FIG. 1B

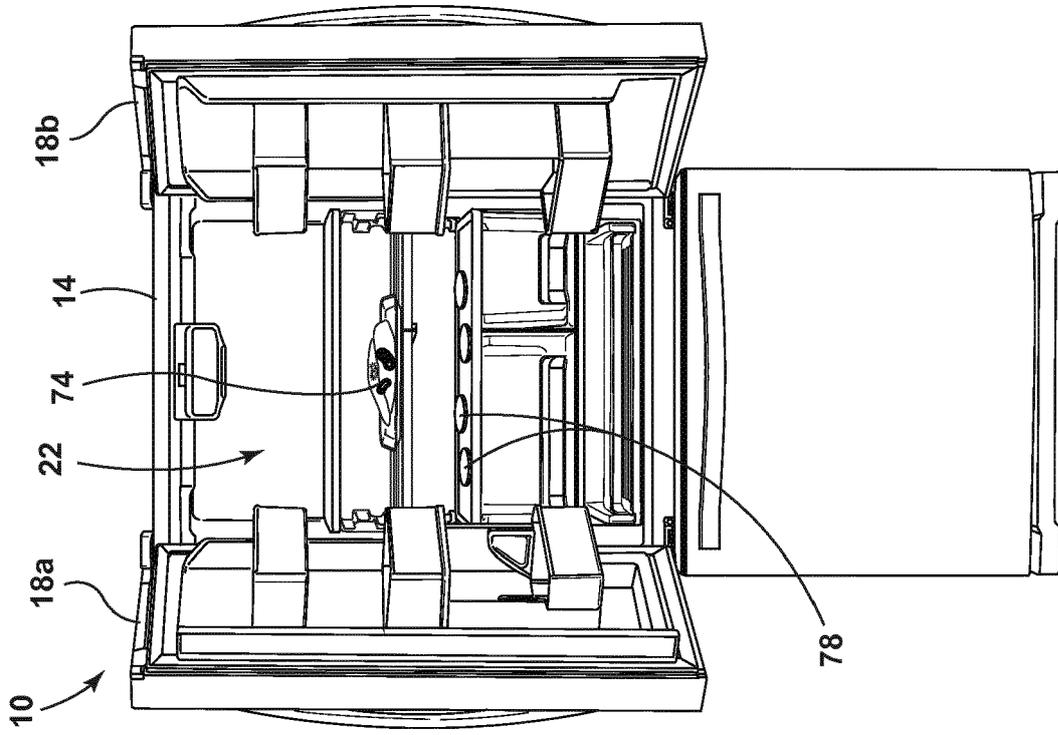


FIG. 1A

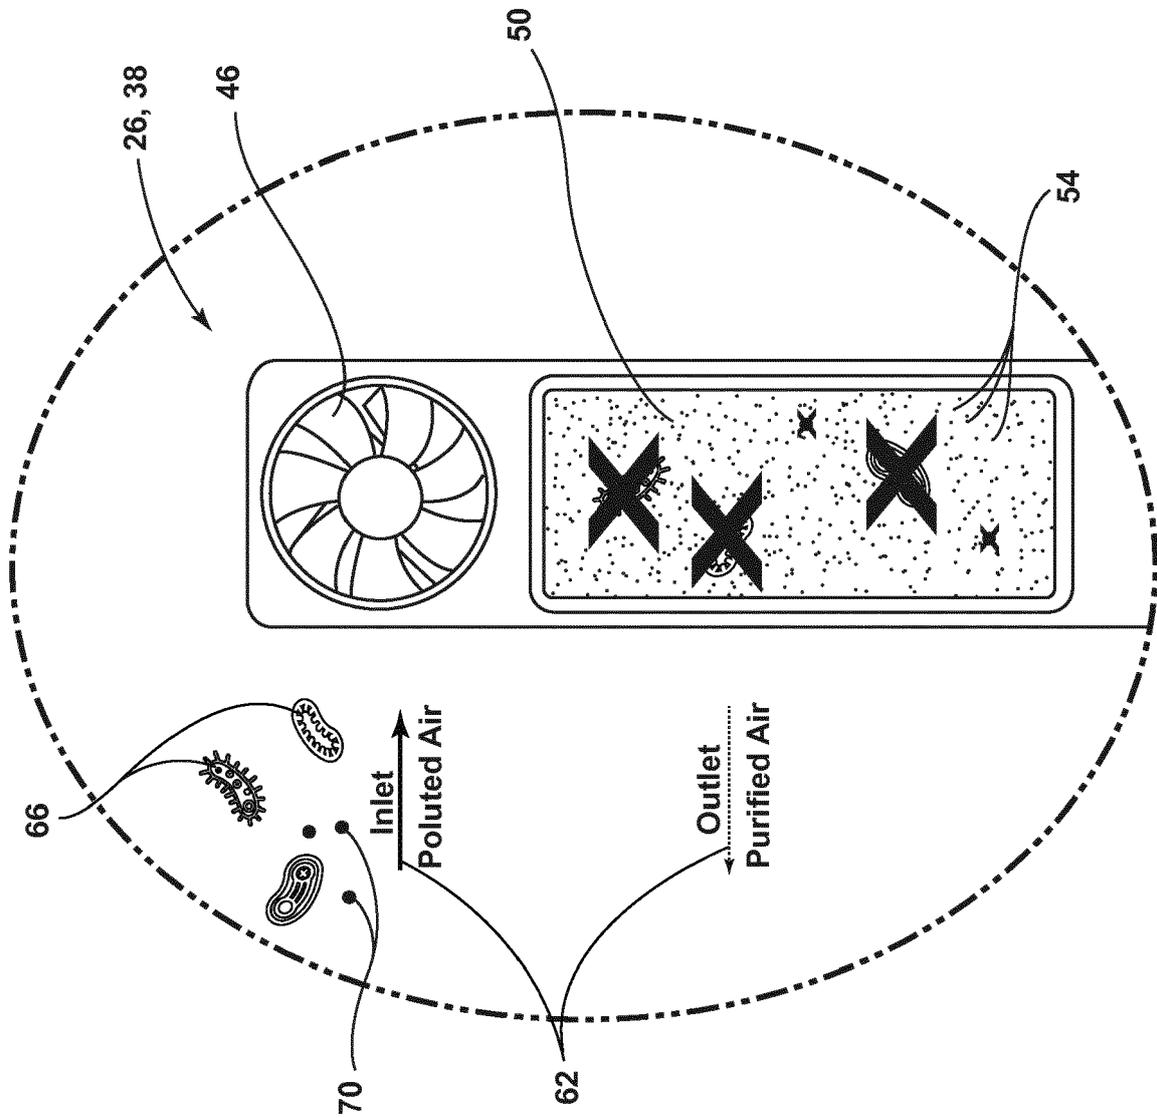
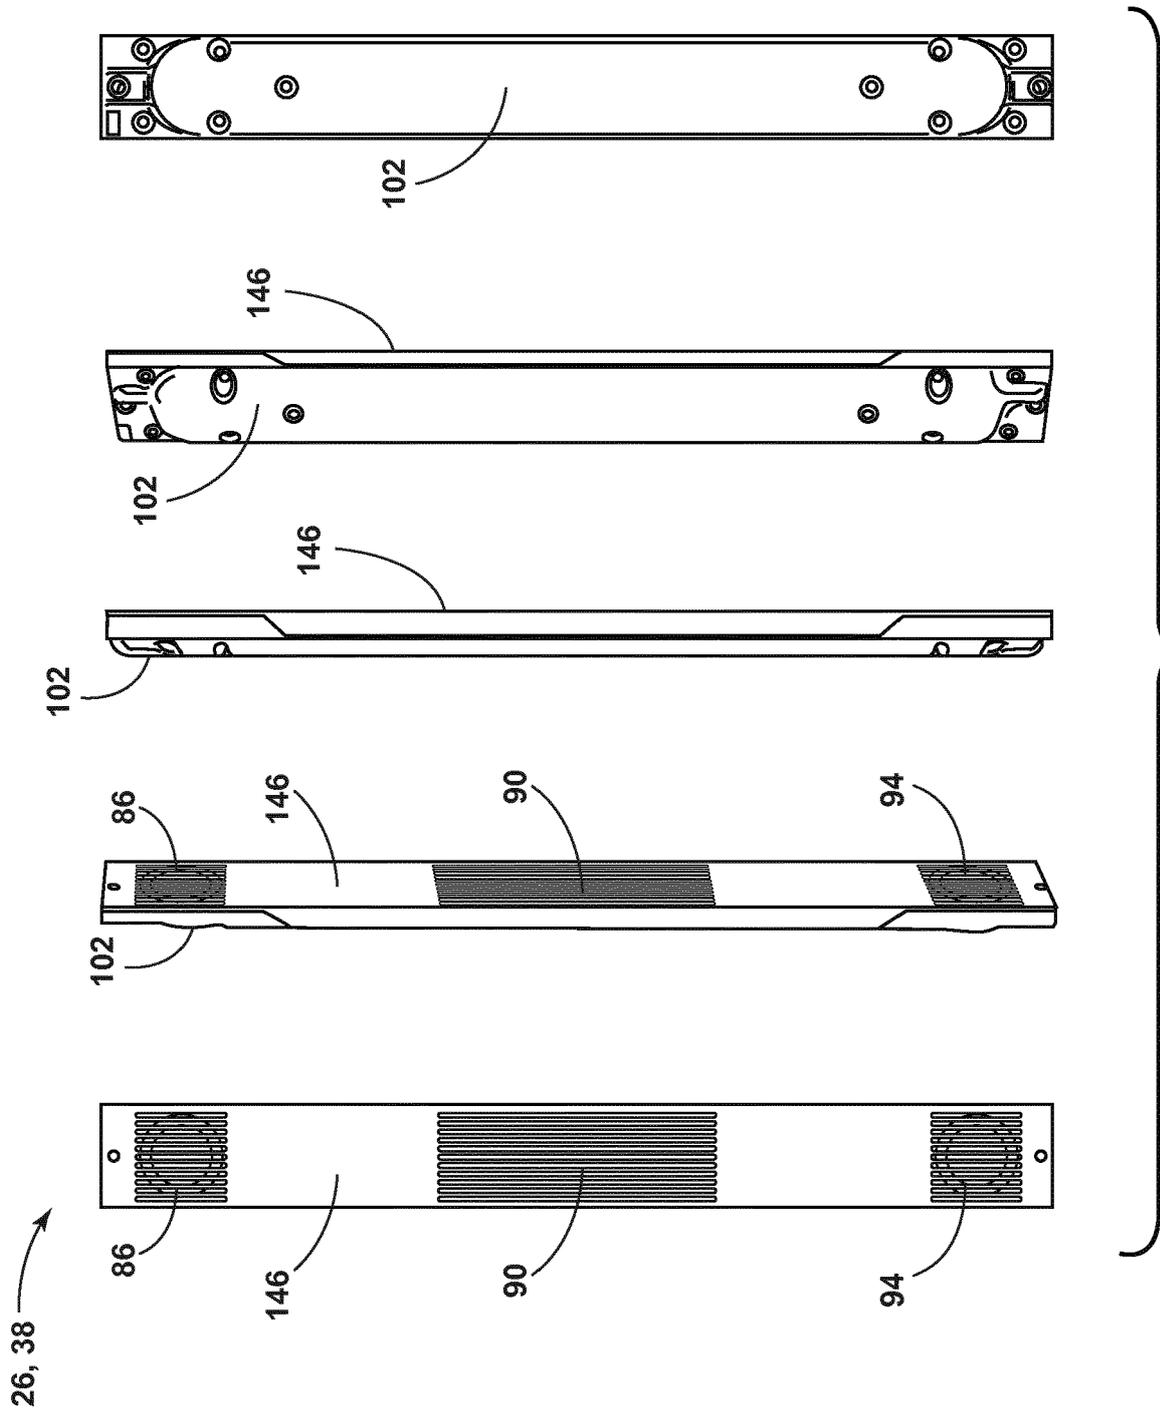


FIG. 2



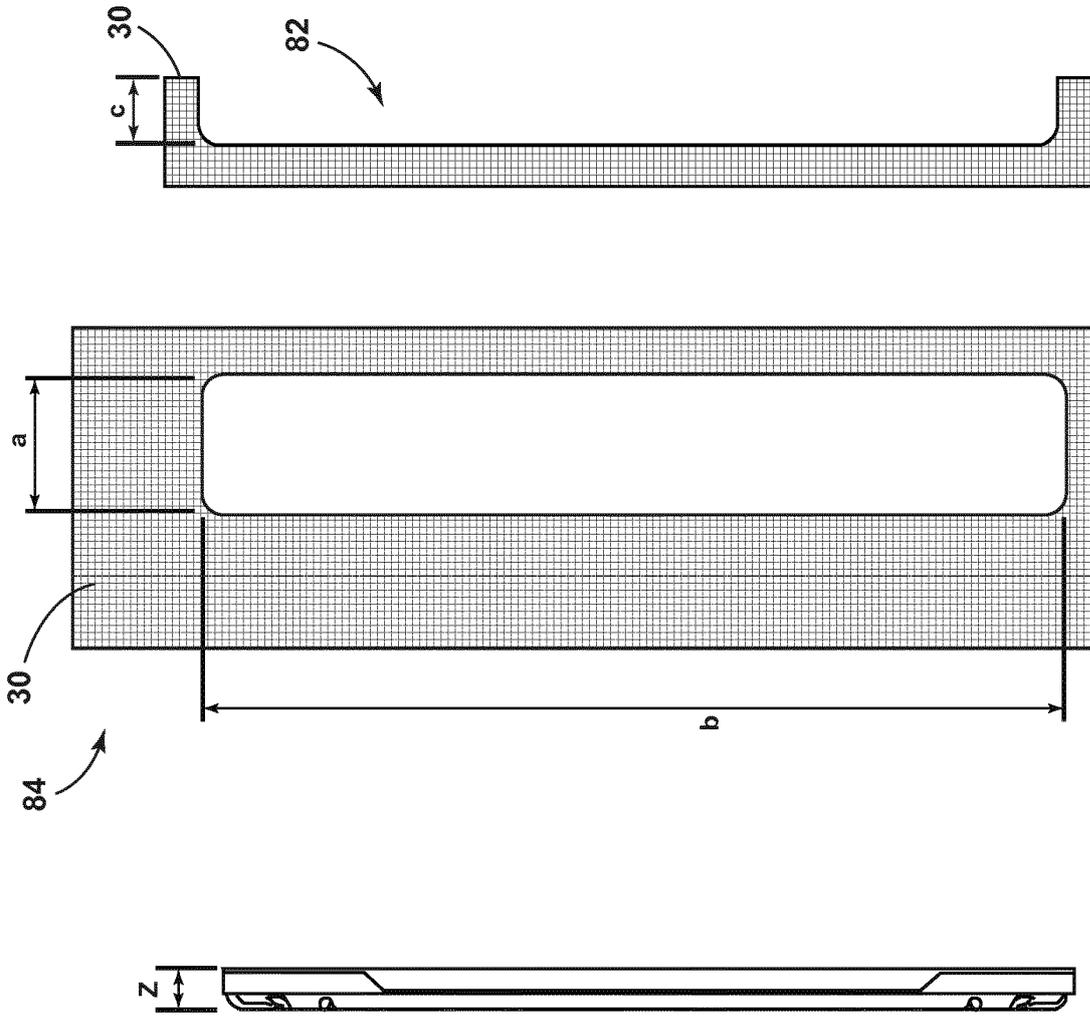


FIG. 4B

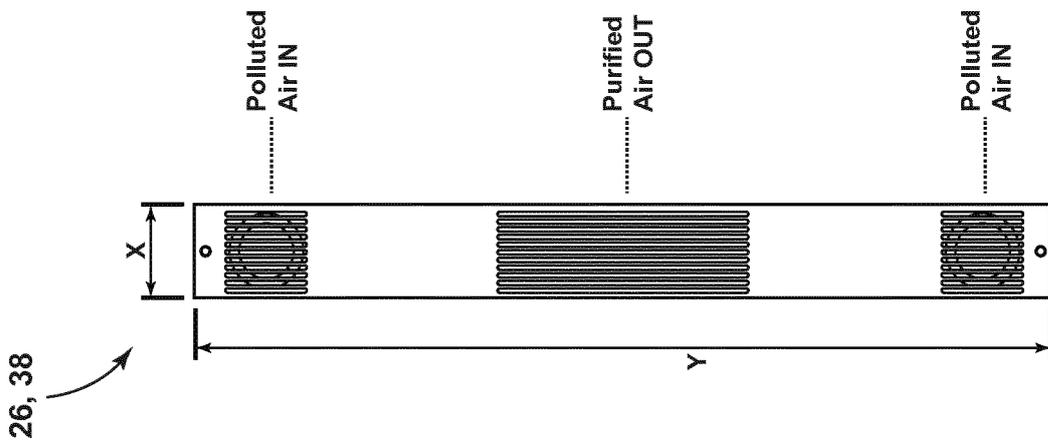


FIG. 4A

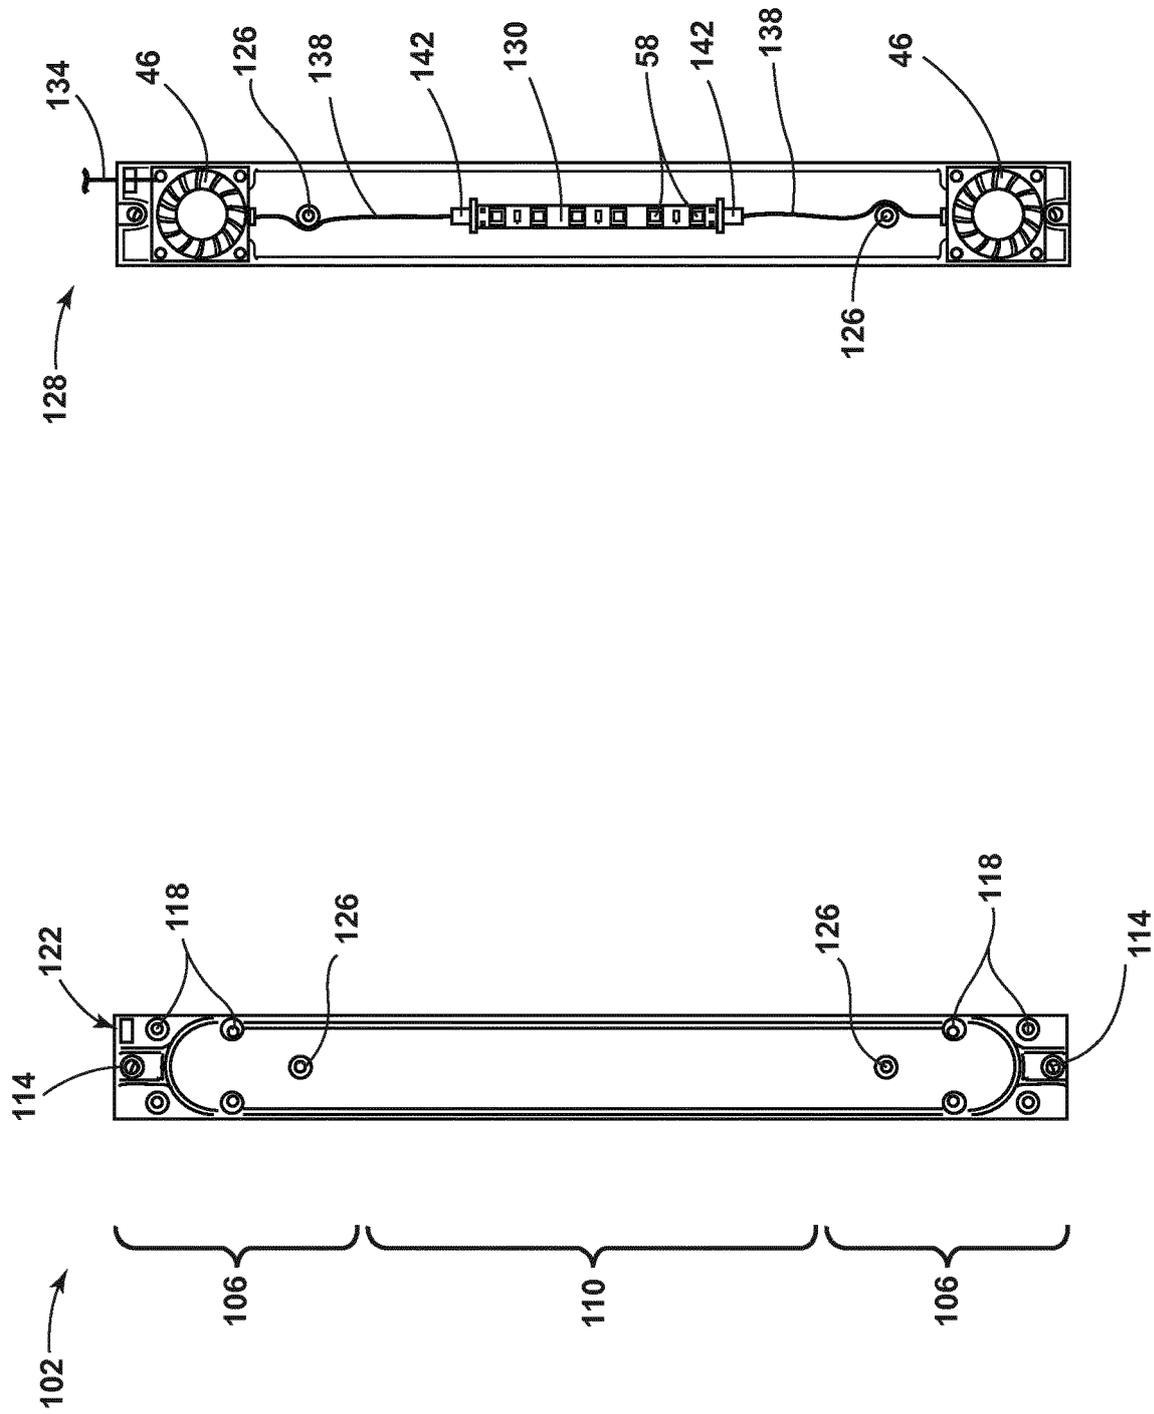


FIG. 5B

FIG. 5A

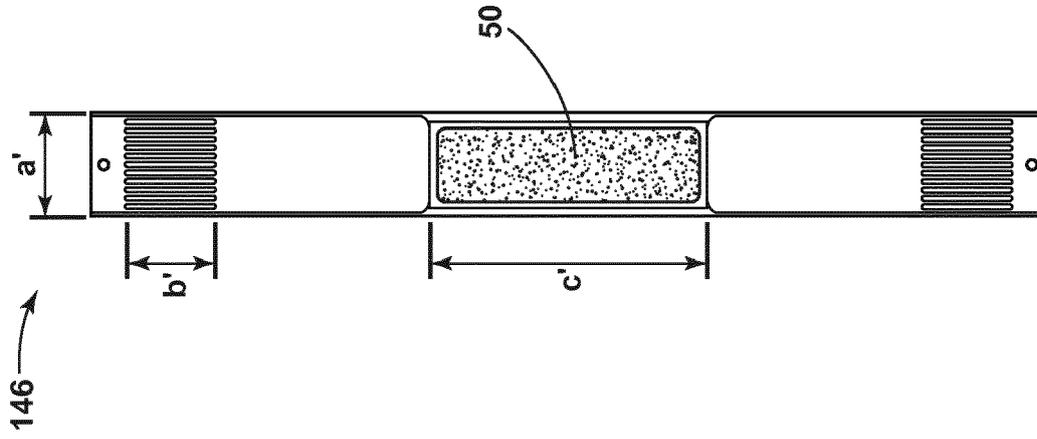


FIG. 6B

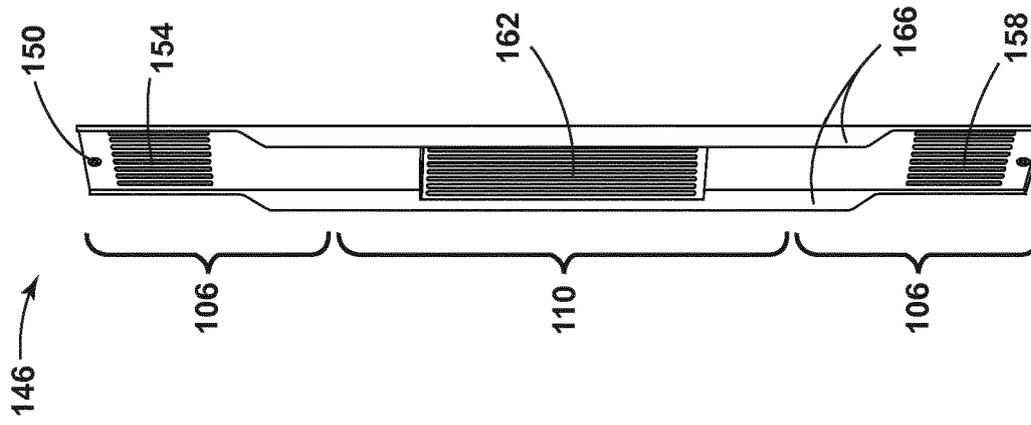


FIG. 6A

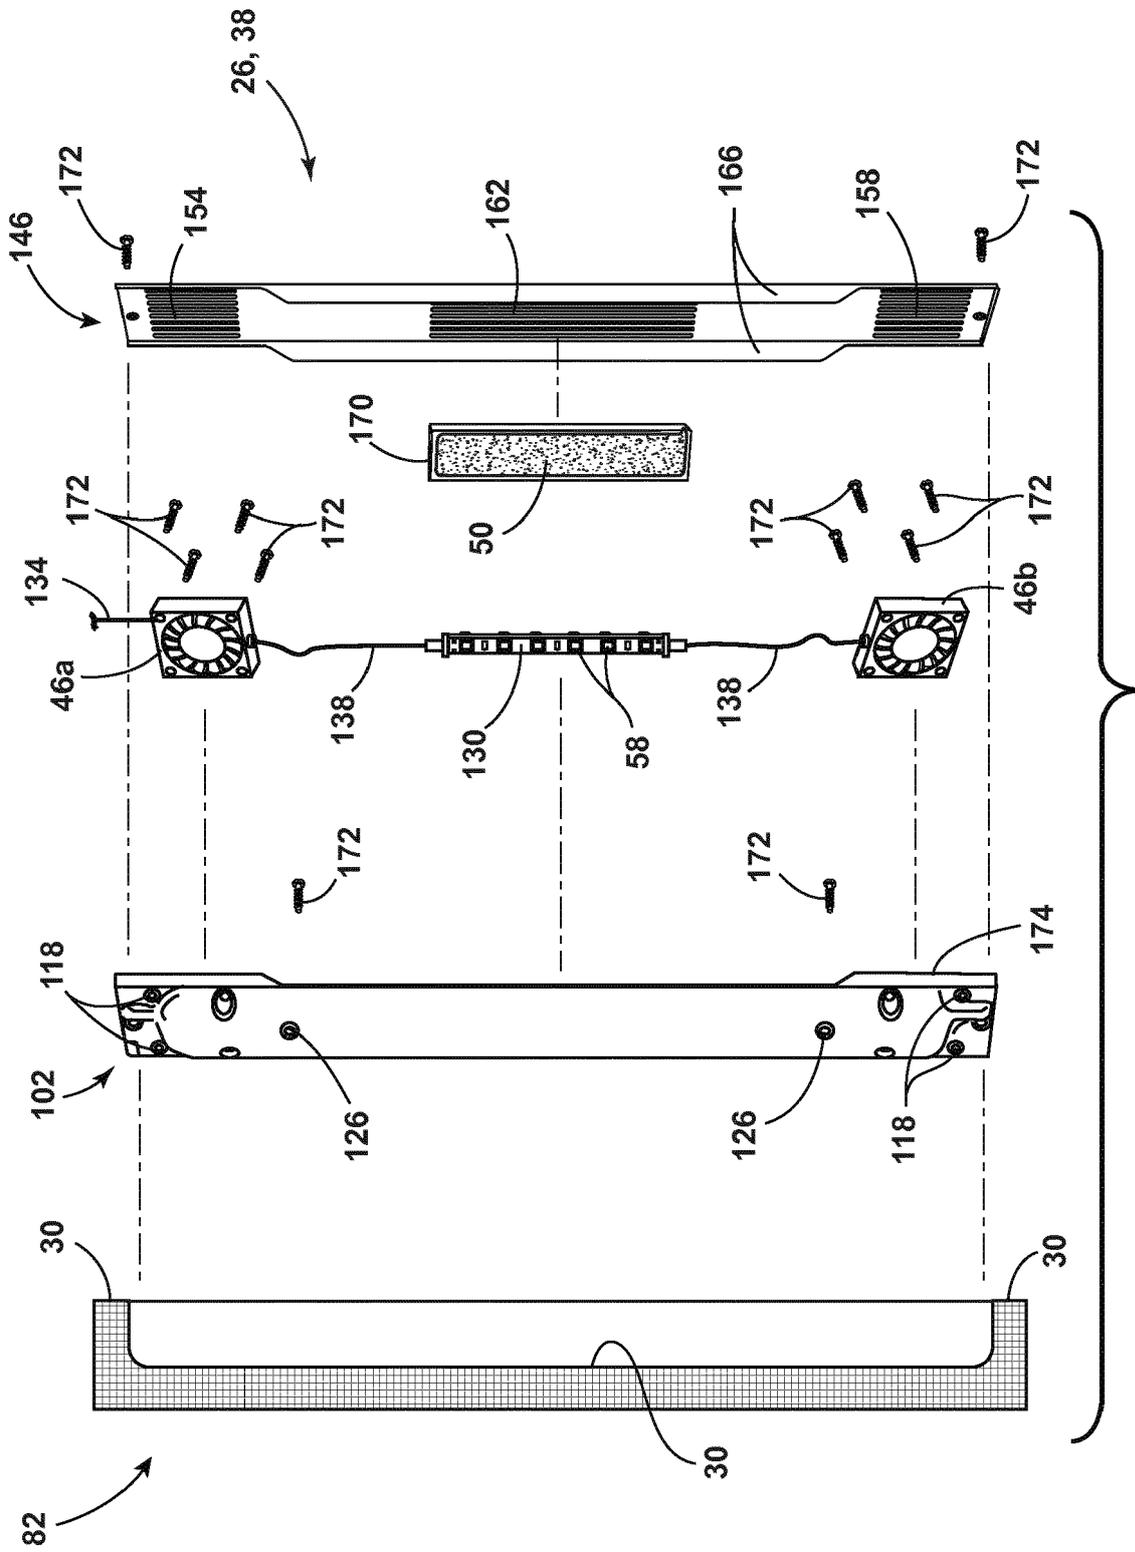


FIG. 7

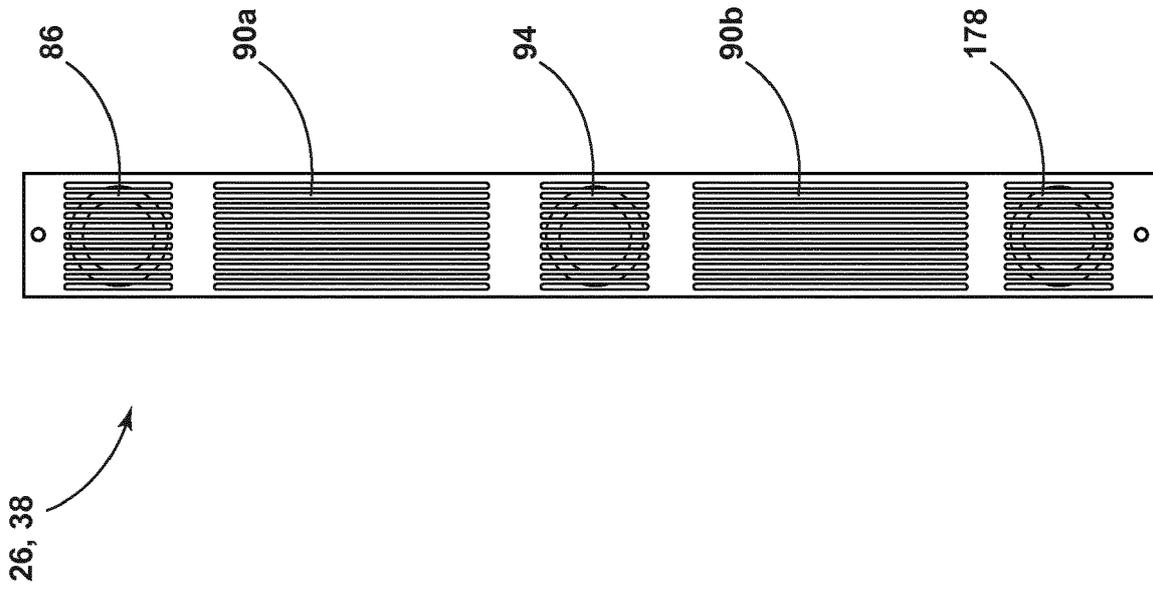


FIG. 8A

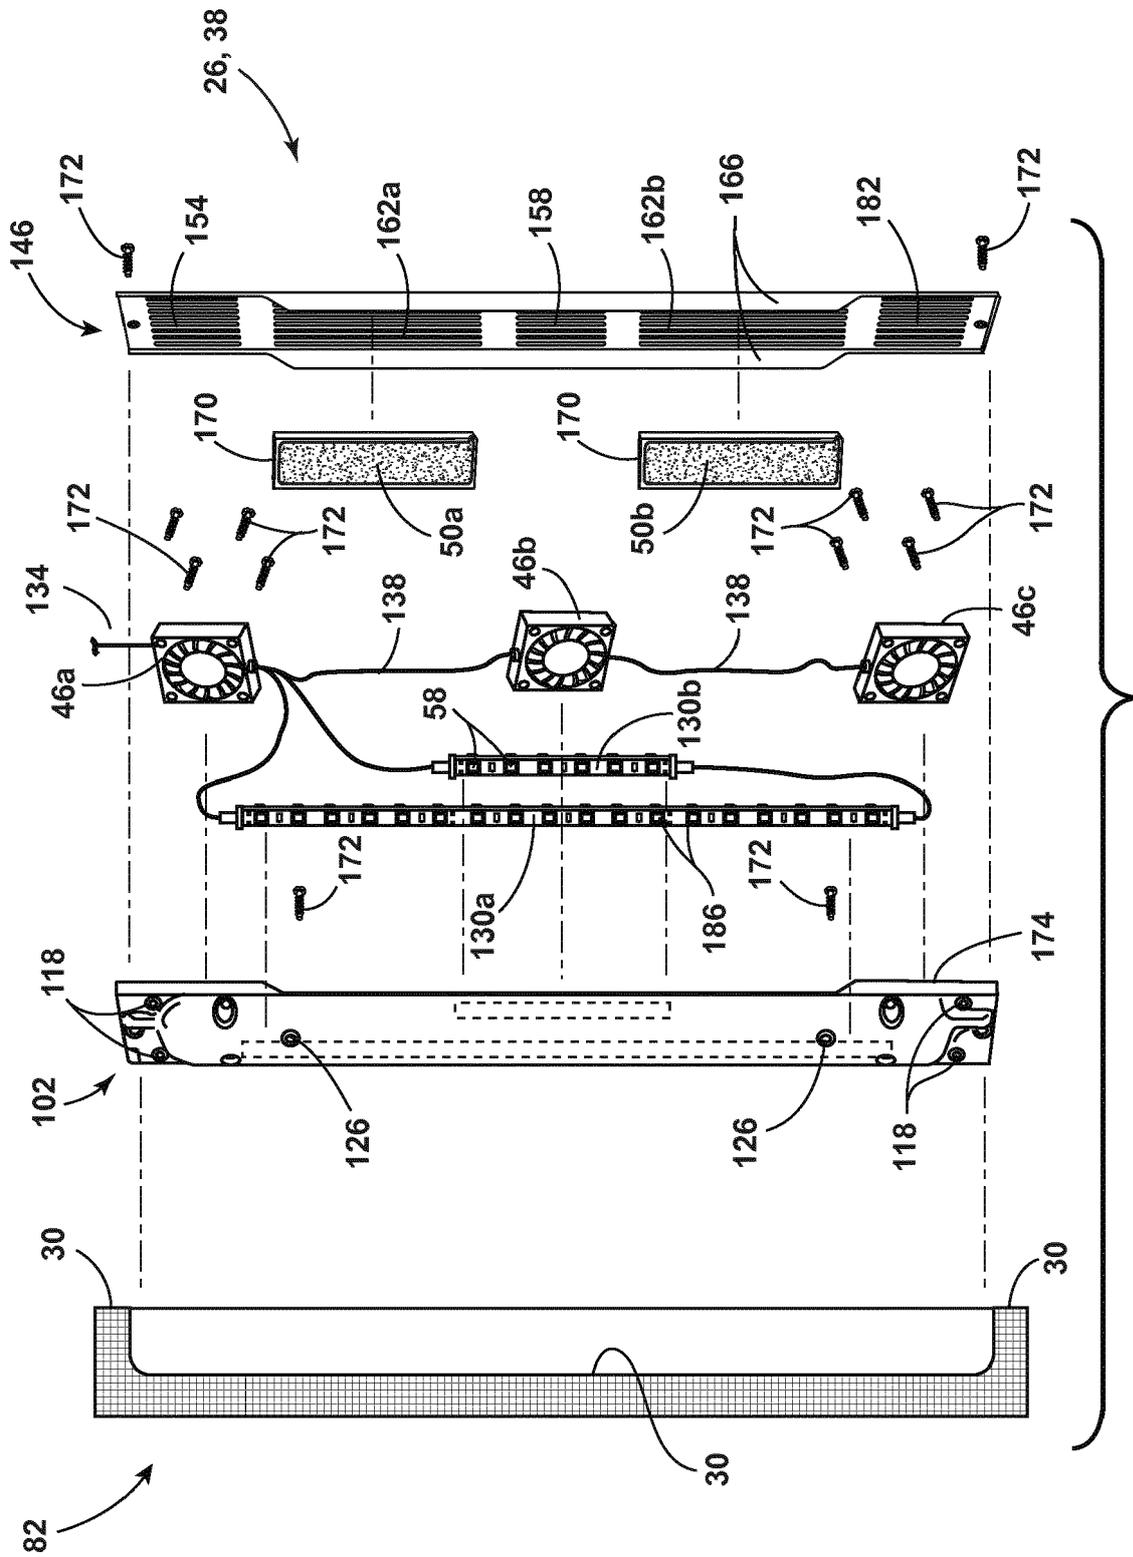


FIG. 8B

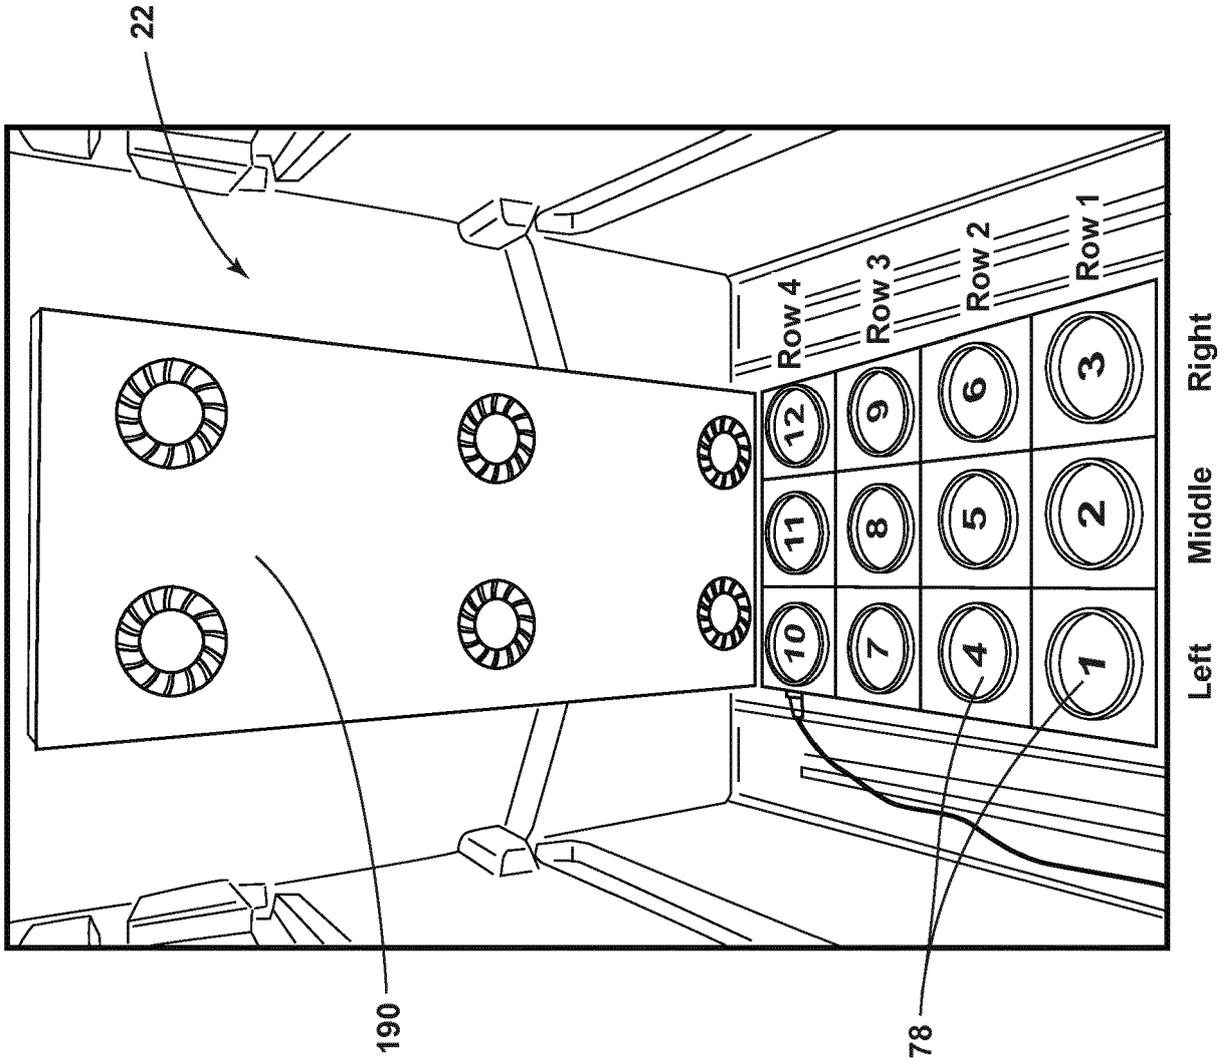


FIG. 9A

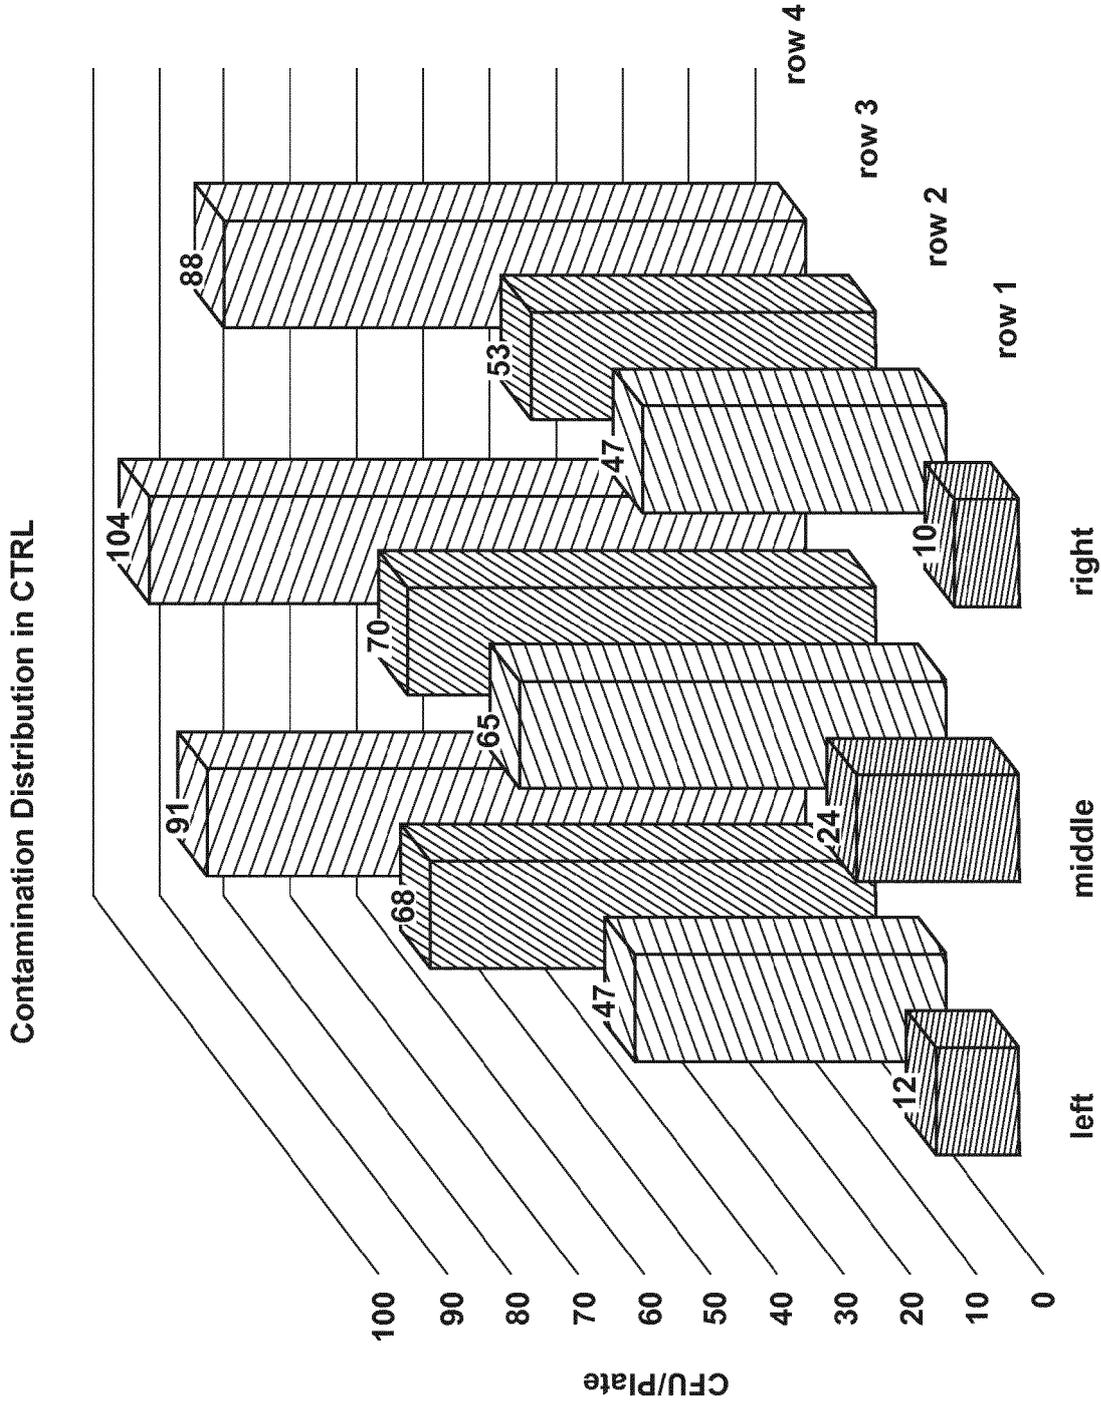


FIG. 9B

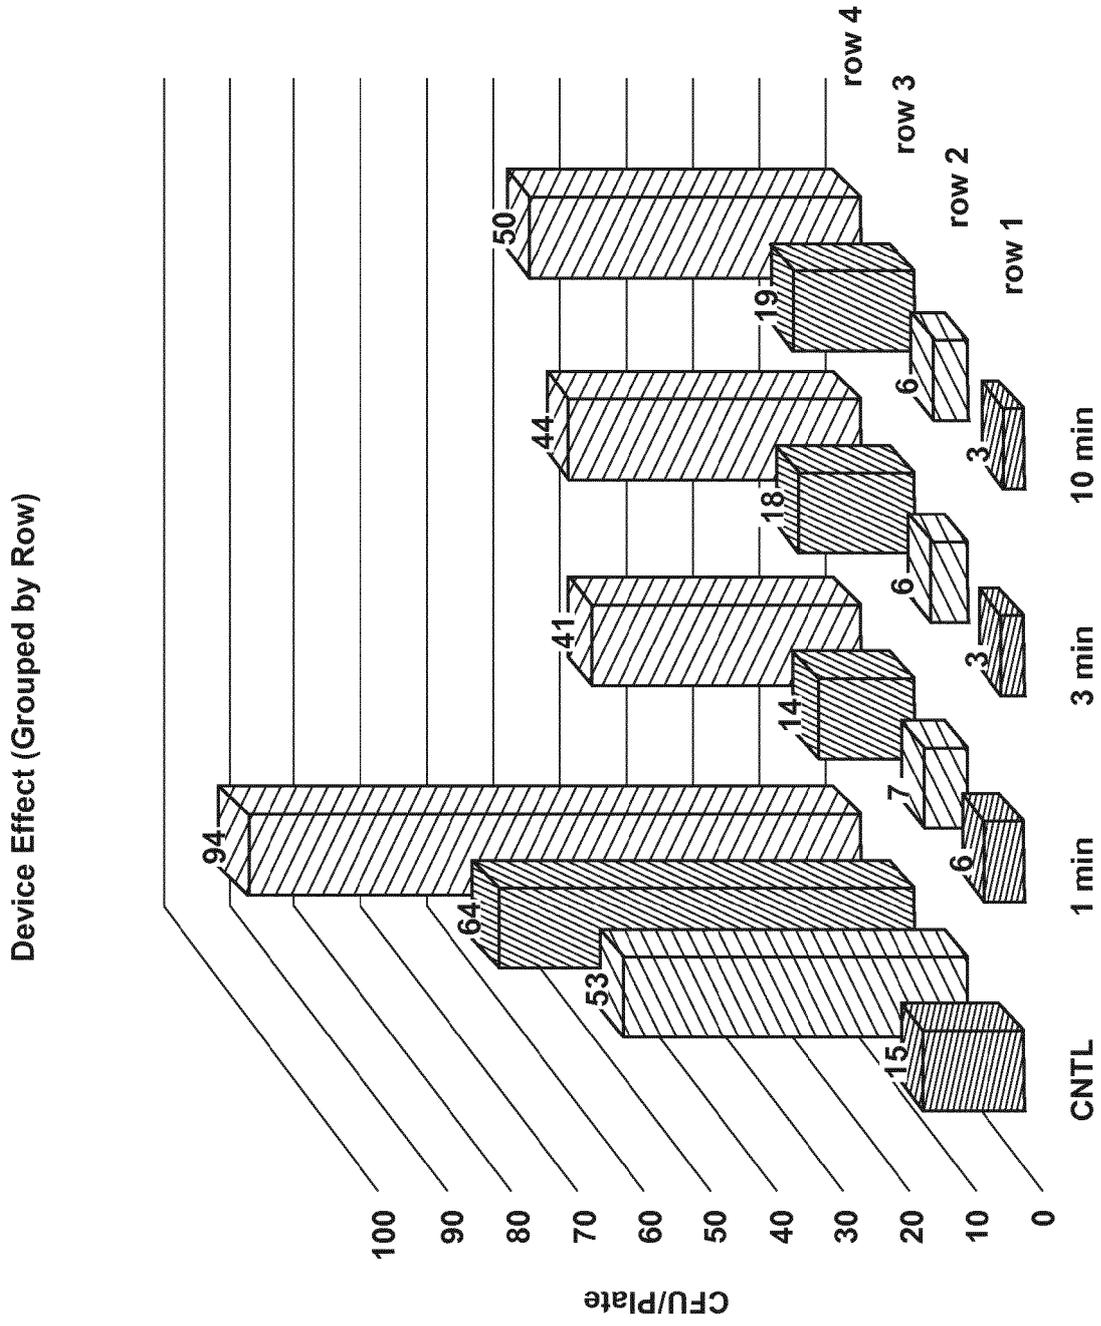


FIG. 9C

Filter Effect on Bacterial (E. coli) Survival at 4°C

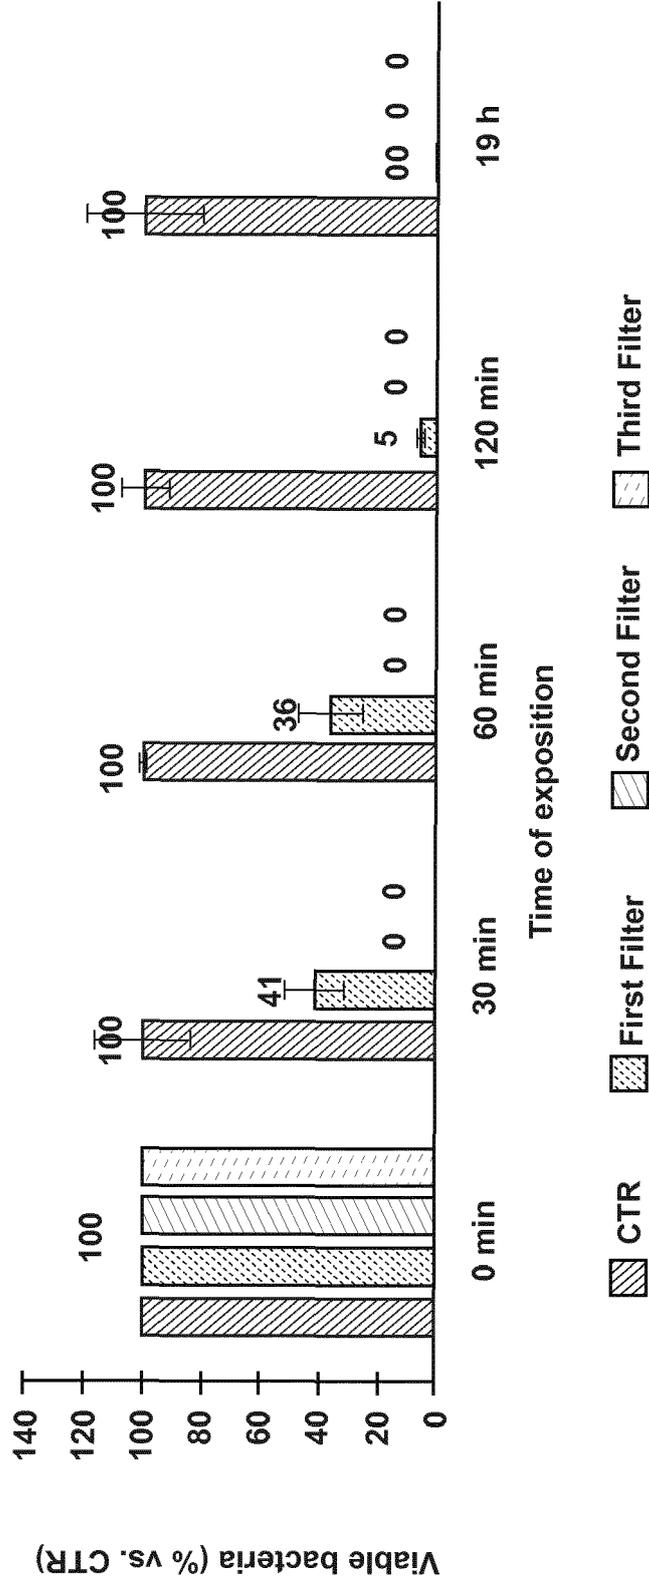


FIG. 10

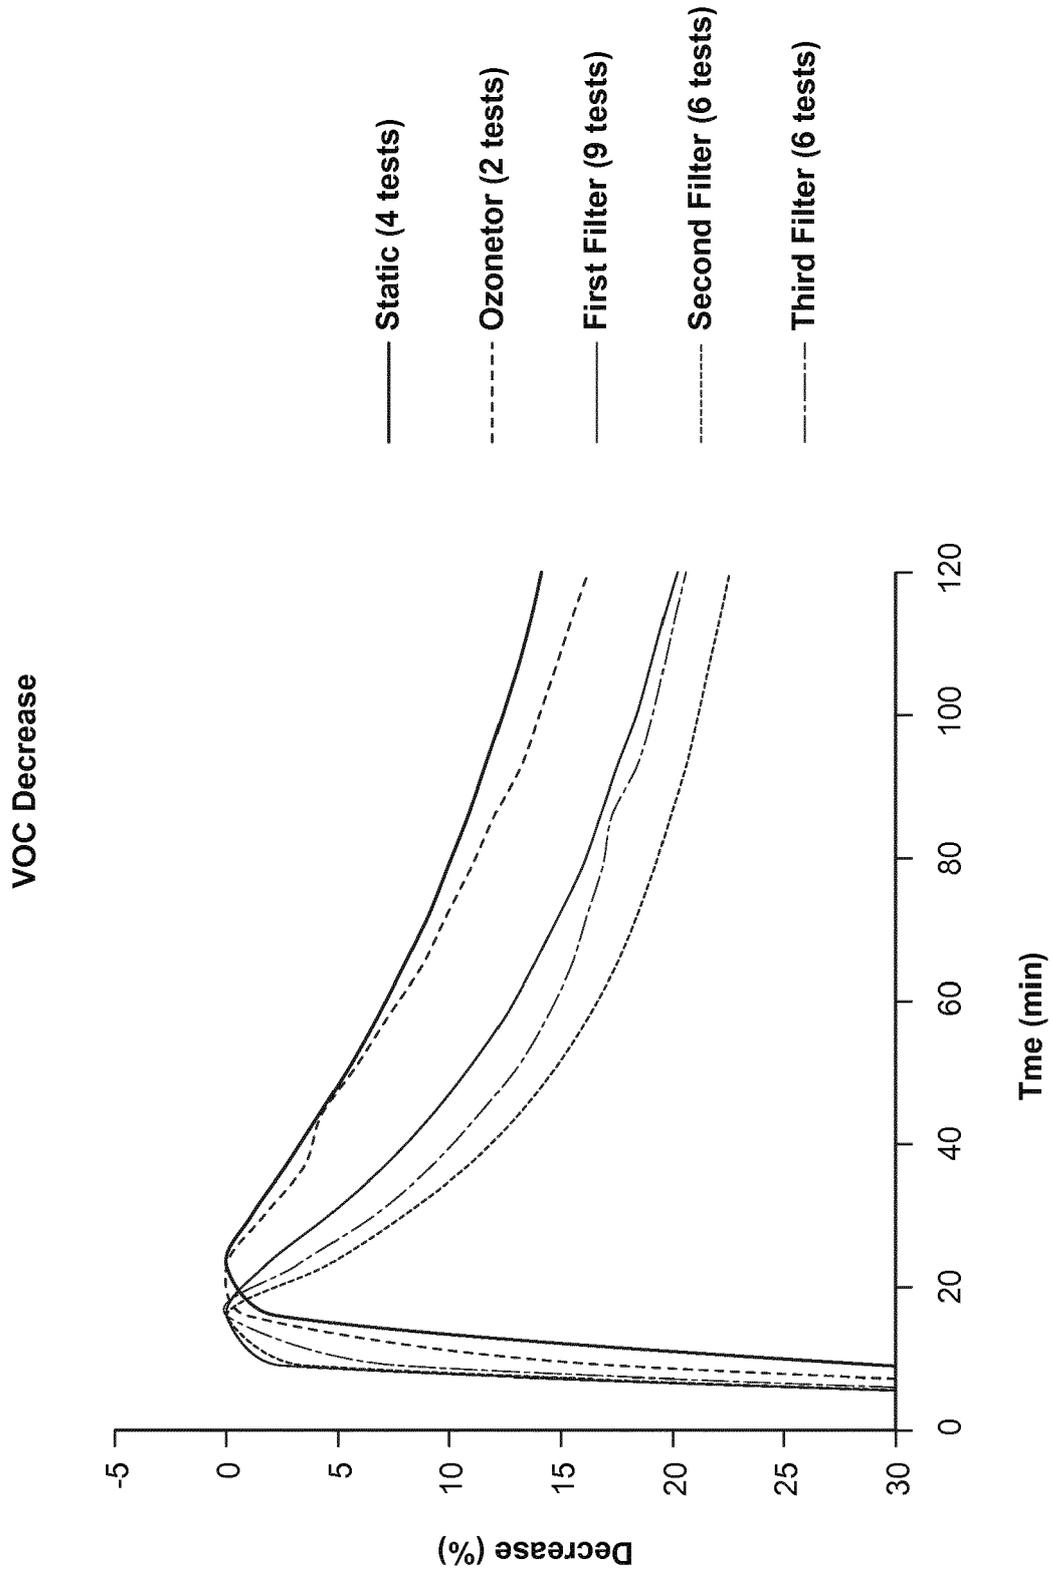


FIG. 11A

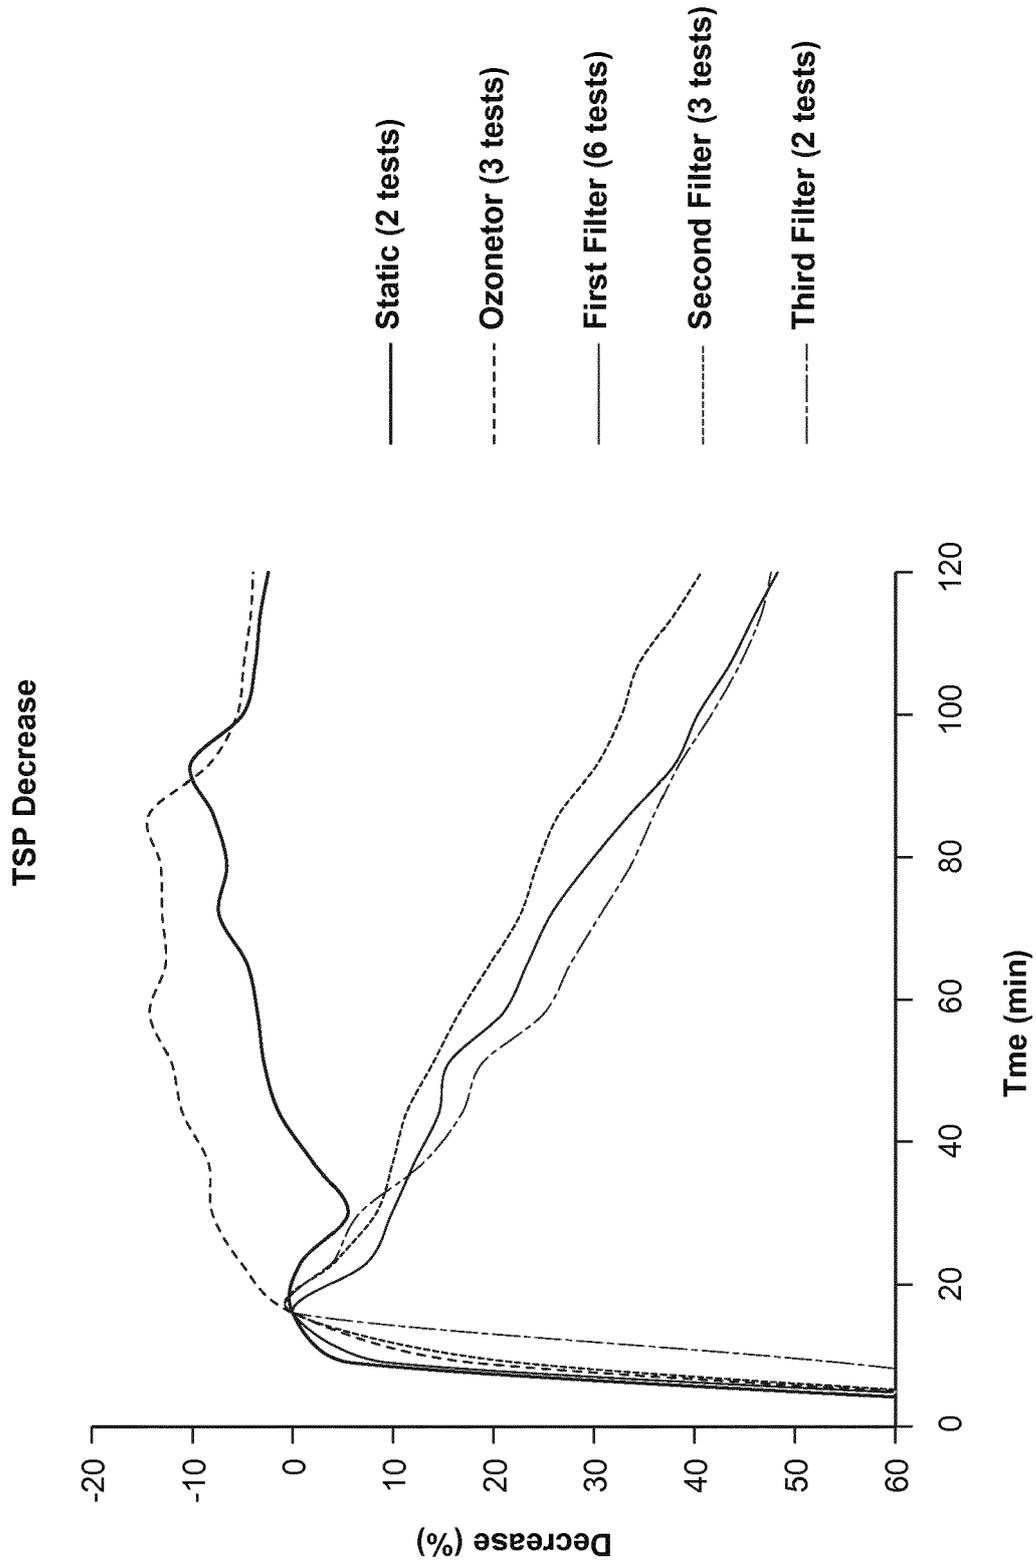


FIG. 11B



EUROPEAN SEARCH REPORT

Application Number
EP 19 18 0637

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	US 2003/047079 A1 (KAISER DOLORES [US]) 13 March 2003 (2003-03-13) * figures 5-7 *	1-13	INV. F25D17/04
Y	US 2014/245771 A1 (KIM EUNJEONG [KR] ET AL) 4 September 2014 (2014-09-04) * paragraphs [0030], [0034], [0035]; figure 2 *	1,2,4,5, 7-12	
Y	US 2014/360213 A1 (SON MINA [KR] ET AL) 11 December 2014 (2014-12-11) * paragraphs [0093], [0129] *	3	
Y	US 2015/033784 A1 (PARK JUNG YEOL [KR] ET AL) 5 February 2015 (2015-02-05) * paragraphs [0032], [0034]; figure 3 *	6	
Y	EP 2 527 769 A2 (PANASONIC CORP [JP]) 28 November 2012 (2012-11-28) * paragraphs [0101], [0316], [0331], [0334]; figures 19-21 *	13	
			TECHNICAL FIELDS SEARCHED (IPC)
			F25D A61L A23L
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		12 December 2019	Canköy, Necdet
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (P04/C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 19 18 0637

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-12-2019

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003047079 A1	13-03-2003	NONE	
US 2014245771 A1	04-09-2014	AU 2014200525 A1 CN 103983069 A EP 2765372 A2 KR 20140101629 A US 2014245771 A1	28-08-2014 13-08-2014 13-08-2014 20-08-2014 04-09-2014
US 2014360213 A1	11-12-2014	AU 2011350356 A1 CN 102741633 A EP 2526356 A1 KR 20120075825 A US 2013015753 A1 US 2014360213 A1 US 2014368103 A1 WO 2012091256 A1	09-08-2012 17-10-2012 28-11-2012 09-07-2012 17-01-2013 11-12-2014 18-12-2014 05-07-2012
US 2015033784 A1	05-02-2015	CN 204115373 U KR 20150014815 A US 2015033784 A1 US 2017216475 A1 US 2017348456 A1	21-01-2015 09-02-2015 05-02-2015 03-08-2017 07-12-2017
EP 2527769 A2	28-11-2012	EP 2141427 A1 EP 2527768 A2 EP 2527769 A2 EP 2527770 A2 TW 200912226 A WO 2008132817 A1	06-01-2010 28-11-2012 28-11-2012 28-11-2012 16-03-2009 06-11-2008