

**CULTURA  
E SCIENZA  
DEL COLORE**

**COLOR  
CULTURE  
AND SCIENCE**

Rivista dell'Associazione Italiana Colore

[www.gruppodelcolore.it](http://www.gruppodelcolore.it)

DOI: 10.23738/ccsj.i82017.00

rivista semestrale | half-yearly journal | DOI: 10.23738/CCSJ.00



**08**

**17**

# CULTURA E SCIENZA DEL COLORE COLOR CULTURE AND SCIENCE

Rivista semestrale dell'Associazione Italiana Colore  
<http://jcolore.gruppodelcolore.it/>  
ISSN 2384-9568  
DOI: 10.23738/CCSJ.00  
ANCE E227716

## DIRETTORE RESPONSABILE | EDITOR-IN-CHIEF

Maurizio Rossi (*Politecnico di Milano, IT*)

## REDAZIONE | ASSOCIATE EDITORS

Aldo Bottoli (*B&B Colordesign, IT*)  
Daria Casciani (*Politecnico di Milano, IT*)  
Davide Gadia | Deputy Editor (*Università degli Studi di Milano, IT*)  
Marco Gaiani (*Università di Bologna, IT*)  
Silvia Piardi (*Politecnico di Milano, IT*)  
Alessandro Rizzi (*Università degli Studi di Milano, IT*)  
Francesca Valan (*Studio Valan, IT*)

## EDITORIAL BOARD MEMBERS

John Barbur (*City University London, UK*)  
Giovanni Bartolozzi (*IFAC- CNR, IT*)  
Berit Bergstrom (*NCS Colour AB, SE*)  
Giulio Bertagna (*B&B Colordesign, IT*)  
Janet Best (*Natific, UK*)  
Aldo Bottoli (*B&B Colordesign, IT*)  
Patrick Callet (*École Centrale Paris, FR*)  
Jean-Luc Capron (*Université Catholique de Louvain, BE*)  
Daria Casciani (*Politecnico di Milano, IT*)  
Osvaldo Da Pos (*Università degli Studi di Padova, IT*)  
Bepi De Mario (*CRASMI, IT*)  
Hélène DeClermont-Gallerade (*Chanel Parfum beauté, FR*)  
Reiner Eschbach (*Xerox, USA*)  
Alessandro Farini (*INO-CNR, IT*)  
Christine Fernandez-Maloigne (*University of Poitiers, FR*)  
Renato Fignini (*Konica-Minolta, EU*)  
Raffaella Fontana (*INO-CNR, IT*)  
Davide Gadia (*Università degli Studi di Milano, IT*)  
Marco Gaiani (*Università di Bologna, IT*)  
Robert Hirschler (*Serviço Nacional de Aprendizagem Industrial, BR*) Sandra Krasovec (*Fashion Institute of Technology, USA*)  
Francisco Imai (*Canon, USA*)  
Matteo Lanaro (*Università degli Studi di Milano, IT*)  
Lia Luzzatto (*Color and colors, IT*)  
Kevin Mansfield (*UCL, UK*)  
Veronica Marchiafava (*Associazione Italiana Colore, IT*)

## PEER REVIEW PROCESS

Tutti gli articoli inviati alla rivista "Cultura e Scienza del Colore - Color Culture and Science" sono sottoposti ad un processo di revisione secondo la seguente procedura:

### PRIMA REVISIONE

Gli associate editors valutano ogni articolo per determinare se il tema e il contenuto sono di interesse per la rivista "Cultura e Scienza del Colore - Color Culture and Science". Una volta valutati gli articoli, gli associate editors selezionano una serie di revisori scegliendoli nell'editorial board in base all'esperienza degli stessi in un particolare settore disciplinare o tema.

### SECONDA REVISIONE

Ogni articolo è revisionato da due revisori in un processo in cui essi stessi e gli autori sono mantenuti anonimi. Ai revisori è chiesto di valutare l'articolo considerando la sua originalità, la metodologia applicata e l'impatto sulla ricerca o sulla pratica professionale. Dopo aver raccolto i commenti dei revisori, gli associate editors elaborano ed inviano al direttore responsabile un giudizio riassuntivo sull'accettazione o meno dell'articolo.

## COLLABORATORI | CONTRIBUTORS

Lynne Bartlett, Daria Casciani, Osvaldo da Pos, Agapito Di Tommaso, Ivano Forte, Vincenzo Garro, Anna Maria Gueli, Maria Pompeiana Iarossi, Agata Kwiatkowska-Lubanska, Michela Lecca, Sabina Martusciello, Maria Dolores Morelli, Giampiero Mele, Stefania Pasquale, Alessio Pietrini, Renata Pompas, Maurizio Rossi, Michela Rossi, Desirée Sabatini, Mauro Sabatini, Ilma Schiavitti, Anna Luana Tallarita

## EDITORE | PUBLISHER

Gruppo del Colore – Associazione Italiana Colore  
[www.gruppodelcolore.it](http://www.gruppodelcolore.it)  
Sede legale: Piazza Carlo Caneva, 4 - 20154 Milano (Italia)

# NUMERO 08 - DICEMBRE 2017 NUMBER 08 - DECEMBER 2017

DOI: 10.23738/ccsj.i82017.00



Gabriel Marcu (*Apple, USA*)  
Anna Marotta (*Politecnico di Torino, IT*)  
Manuel Melgosa (*Universidad de Granada, ES*)  
Anna Grazia Mignani (*IFAC-CNR, IT*)  
Annie Mollard-Desfour (*CNRS, FR*)  
Maria Luisa Musso (*Universidad de Buenos Aires, RA*)  
Claudio Oleari (*Università degli Studi di Parma, IT*)  
Galina Paramei (*Liverpool Hope University, UK*)  
Laurence Pauliac (*Historienne de l'Art et de l'Architecture, Paris, FR*)  
Silvia Piardi (*Politecnico di Milano, IT*)  
Marcello Picollo (*IFAC-CNR, IT*)  
Renata Pompas (*AFOL Milano-Moda, IT*)  
Boris Pretzel (*Victoria & Albert Museum, UK*)  
Noel Richard (*University of Poitiers, FR*)  
Katia Ripamonti (*Cambridge Research System, UK*)  
Alessandro Rizzi (*Università degli Studi di Milano, IT*)  
Maurizio Rossi (*Politecnico di Milano, IT*)  
Jodi L. Sandford (*Università di Perugia, IT*)  
Raimondo Schettini (*Università degli Studi di Milano Bicocca, IT*)  
Gabriele Simone (*ST Microelectronics, IT*)  
Andrea Siniscalco (*Politecnico di Milano, IT*)  
Ferenc Szabó (*University of Pannonia, HU*)  
Mari Uusküla (*Tallinn University, EE*)  
Francesca Valan (*Studio Valan, IT*)  
Ralf Weber (*Technische Universität Dresden, DE*)  
Alexander Wilkie (*Charles University in Prague, CZ*)

All articles submitted to "Cultura e Scienza del Colore - Color Culture and Science" journal are peer-reviewed according to the following procedure:

### FIRST REVIEW

The Associate Editors evaluates each article in order to define if the topic and content is suitable for consideration by the "Cultura e Scienza del Colore - Color Culture and Science" journal. Once the article passes the initial review, the Associate Editors select several referees in the Editorial Board based on their expertise in the particular field or topic

### SECOND REVIEW

Each article is reviewed by two or three referees under a double-blind peer review process where the authors and the reviewers are kept anonymous. Referees are asked to evaluate the manuscript based on its originality, methodology and impact to research and relevance to the professional practice. After collecting the referees' reports, the Associate Editors makes a recommendation on the acceptability of the article to the Editor in Chief.



GRUPPO DEL COLORE  
ASSOCIAZIONE ITALIANA COLORE

**CULTURA E SCIENZA DEL COLORE  
COLOR CULTURE AND SCIENCE**  
Rivista dell'Associazione Italiana Colore  
Registrazione presso il Tribunale di Milano  
al n. 233 del 24.06.2014

<b>ENGLISH   ITALIAN</b>	<b>Editorial</b> by Maurizio Rossi	<b>5</b>
	<b>Principles and applications. Consistency and experimentation in the work of Piero Bottoni, from the “Cromatismi” to Sesto San Giovanni</b> <i>Principi e applicazioni. Coerenza e sperimentazione nell’opera di Piero Bottoni, dai “Cromatismi” a Sesto San Giovanni</i> by Michela Rossi, Maria Pompeiana Iarossi, Giampiero Mele	<b>7</b>
	<b>Colour quantity contrast in Itten’s Theory: Spectrophotometry for verifying statements</b> <i>Il contrasto di quantità nella Teoria di Itten: la spettrofotometria per la verifica degli enunciati</i> by Agapito Di Tommaso, Vincenzo Garro, Anna Maria Gueli, Sabina Martusciello, Maria Dolores Morelli, Stefania Pasquale	<b>23</b>
	<b>The recovery of the original colour of the archive material: the digital colour correction of the ancient anti-Semitic discourse of the Duce in 1938</b> <i>Il recupero del colore originale dei materiali d’archivio: la correzione digitale del colore dello storico discorso antisemita del Duce, nel 1938</i> by Desirée Sabatini, Ivano Forte, Ilma Schiavitti, Mauro Sabatini, Alessio Pietrini	<b>35</b>
	<b>The meanings of the Red</b> <i>Le significazioni del Rosso</i> by Anna Luana Tallarita	<b>47</b>
<b>ENGLISH</b>	<b>An overview of the history of the use of colour in jewellery</b> by Lynne Bartlett	<b>53</b>
	<b>Colour as a mass product. Designing of the collection of interior paint colours for the Polish market</b> by Agata Kwiatkowska-Lubanska	<b>59</b>
	<b>Exploring the relationship between LEDs Lighting, Urban materials chromaticity and People: measurements, design and evaluation</b> by Daria Casciani, Maurizio Rossi	<b>65</b>
<b>REVIEW</b>	<b>Riccardo Falcinelli</b> <b>“Cromorama. How color changed our gaze”</b> by Renata Pompas	<b>75</b>
<b>COLOUMN</b>	<b>Communications and Comments</b> by Michela Lecca and Osvaldo da Pos	<b>79</b>

# Exploring the relationship between LEDs Lighting, Urban materials chromaticity and People: measurements, design and evaluation

---

**Daria Casciani**  
daria.casciani@polimi.it  
**Maurizio Rossi**  
maurizio.rossi@polimi.it

Department of Design,  
Politecnico di Milano

## ABSTRACT

The aim of the research was to define urban lighting design insights, by reflecting on the relationship between urban material properties (chromaticity and spectral reflectance) and specific LEDs based lighting spectral emissions to enhance the nightly image of cities and to achieve efficient solutions. A preliminary selection of urban material, representative of different “urban colourscape”, was then followed by the definition of several lighting receipts (illuminants) which were defined by three research hypotheses. An exploratory perceptive user assessment was set up and performed to derive some insights about the transformation of the user’s perception about the same material with different SPDs, to significantly enhance the attractiveness and appeal toward the architectural and urban surfaces.

## KEYWORDS

Lighting Design, Urban Material, SPD, textures, Spectral Reflectance, Chromatic Saturation, LEDs

**Received** 06 June 2017; **Revised** 7 July 2017; **Accepted** 1 September 2017

**CITATION:** Casciani D. and Rossi M. (2017) ‘Exploring the relationship between LEDs Lighting, Urban materials chromaticity and People: measurements, design and evaluation’, *Cultura e Scienza del Colore - Color Culture and Science Journal*, 08, pp. 65-74, DOI: 10.23738/ccsj.i82017.07

---

**Daria Casciani**, designer, research fellow and lighting specialists. She holds a PhD about the analysis, design and evaluation of the relationship between light, city and people. She currently collaborates in research activities about the new perspectives of the design of LED lighting systems at the Laboratorio Luce, Department of Design of the Politecnico di Milano. She also teaches at the Master in Lighting Design & LED Technology and is an Adjunct Professor at the School of Design of the Politecnico di Milano.

**Maurizio Rossi**, Associate professor of Design at Politecnico di Milano. PhD in Computer Science at Università degli Studi di Milano. He is the President of the Associazione Italiana Colore. At Politecnico di Milano he is scientific director of the Laboratorio Luce, director of the Master in Lighting Design & LED Technology, director of the Master in Color Design & Technology, and member of the faculty of the PhD program in Design.

## 1. INTRODUCTION

The literature review defines the “urban colourscape” (Lancaster, 1996) as the colour summation of the exposed elements perceivable in urban public spaces (Yin, 2003), both the natural objects (e.g. urban bare land, rocks, grass, rivers, trees etc.) and the artificial ones referring to urban buildings, structures, roads and furniture (Xiaomin and Yilin, 2009). It is defined both by urban single colours and by the whole visual effect made by the contrasts of different layers of the city and the general environmental luminosity (Valan, 2011). The urban colourscape influences the urban culture and style. The 75% of the main visual leading tonality is made from the combination of the hue of the walls, dependent by the inherent colour of building’s materials or by surfaces paints (Bagordo, 2012). Several studies show that, the great part of historical urban colour is mainly dependent by the inherent colour of building’s materials decided for their cheapness and easiness to be found, such as yellow or white paint (Bagordo, 2012). In more modern urban constructions, with new technologies and new materials, also new colours are used, following the fashionable trends in architecture with saturated coloured coats or luxurious façade surfaces and materials (Borsotti, 2012). The majority of available studies about this topic focused on the urban chromatography during the daytime, forgetting the importance of designing the chromatic image (Nasar, 1998; Lynch 1960) of the city by night (CIE 136 – 2000; Bellia, Agresta and Pedace, 2013) due to the use of artificial lighting design to shape the distinctive quality of the space. This is important to ensure the city beautification (Schanda, 2001), to increase the navigation in the urban nightscape (Van Santen, 2006) and to provide energy efficiency. This paper aims at investigating the urban colourscape by night, considering issues related to urban materials, lighting design practice and LEDs lighting technologies. The hypothesis is that, as LEDs based lighting fixtures are becoming more powerful, efficient and more sophisticated in terms of the provided different spectral power distribution (SPD), the urban lighting design could take into account users’ experiences of the urban chromatography during the night-time.

## 2. RESEARCH AIM

Considering the fact that there are few studies exploring the topic, this research was aimed at pioneering the exploration of the relationship between urban material properties (chromaticity and spectral reflectance) and specific lighting spectral emissions that could enhance the

visual appearance of facades, external walls and street surfaces. The study was performed through objective and subjective evaluations, by using both the quantitative and qualitative analytical method. The research hypothesis is that LEDs based lighting systems, applied in the urban space, can be customized for enhancing the perceived brightness, colour rendering and saturation of colours of materials of a specific urban space and, at the same time, achieving the scope of energy efficiency by wisely manipulating the SPD.

## 3. RESEARCH METHODOLOGY

A two steps investigation about urban materials and LED’s based lighting systems was performed:

- Phase one: collection and preparation of highly recurrent urban materials that were grouped into clusters and measured into a laboratory set up.
- Phase two: definition of lighting receipts specific for the different categorized chromatic samples followed by an exploratory subjective assessment with users.

## 4. URBAN MATERIAL SELECTION

The investigation was performed with a preliminary survey about the most representative urban materials used in Europe, both traditional and modern ones, by collecting samples to be tested into a laboratory set up. The selection was aimed at covering a wide range of chromaticity: stones, bricks along with natural, varnished and treated (oxidated) metals. A small range of materials (20 samples) was measured (Figure 1).

### 4.1 URBAN MATERIAL MEASUREMENTS

Measurements of the spectral reflectance of surfaces (Figure 1) were performed using the Minolta Photospectrometer CM-700d. Each material was measured several times in different points of the surface because colours changed significantly in the same sample. After the calibration test, each measure was repeated five times to derive a mean measurement (Casciani, Musante and Rossi, 2014).

### 4.2 URBAN MATERIAL CLUSTERING

Depending on spectral reflectance, materials were clustered in different categories:

- *yellowish and reddish toned ones*, such as Bricks, Cor-Ten Steel, Dark and Light Brass;
- *reddish materials*, such as Porphyry Stone and red (RAL 3020) varnished

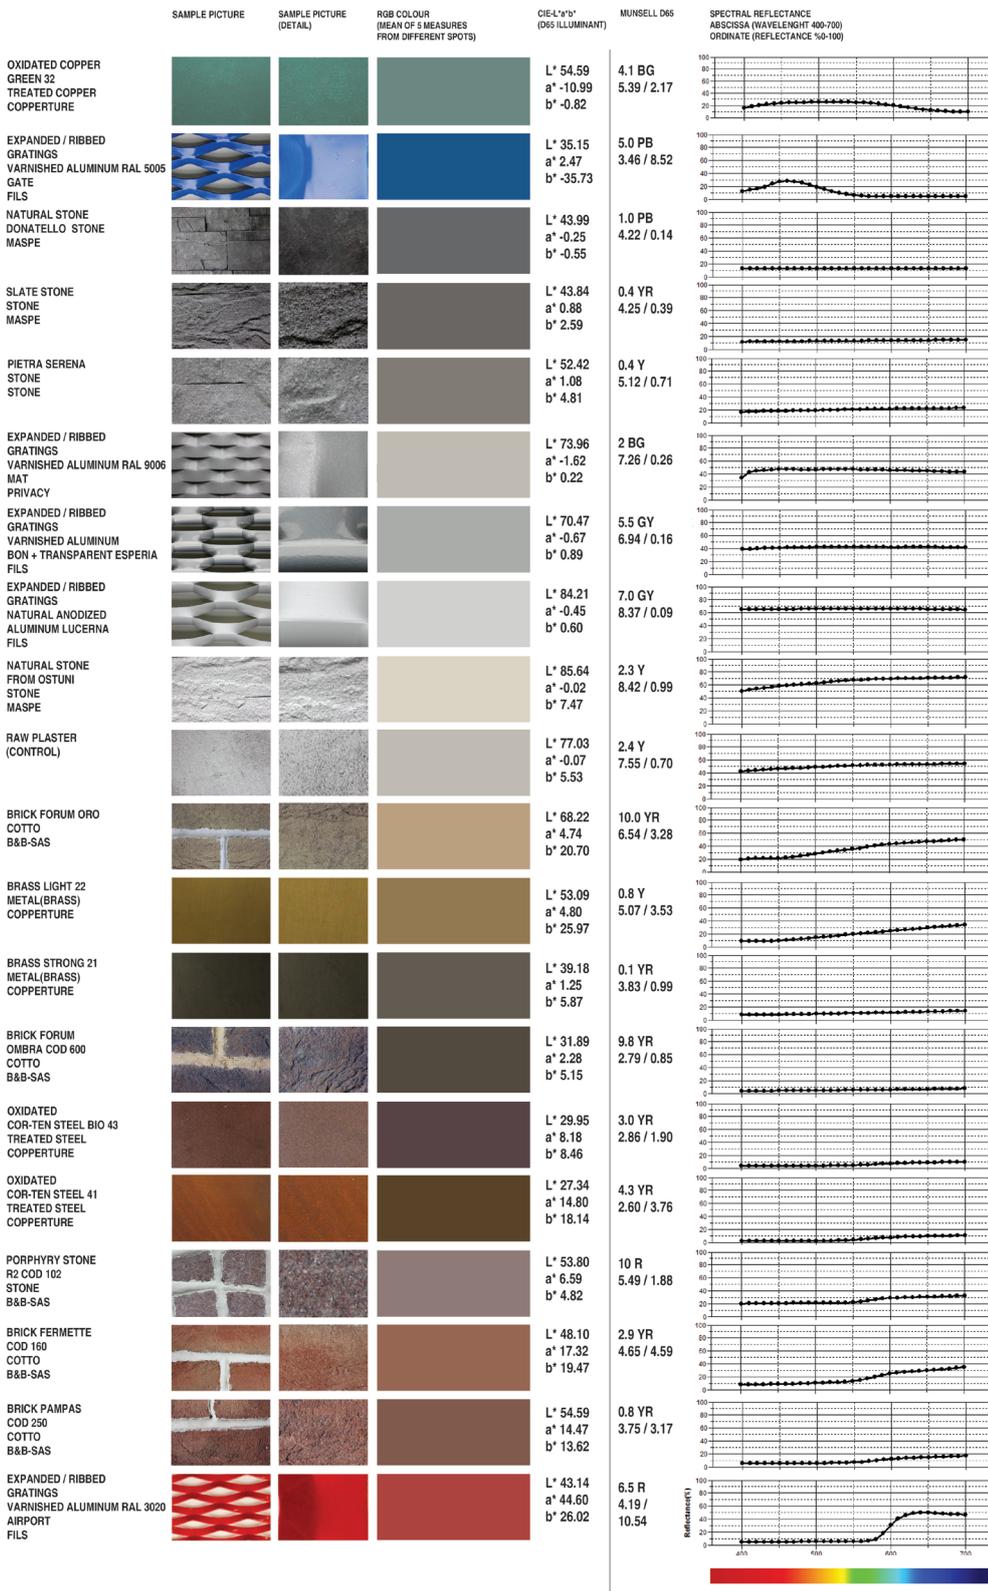


Figure 1 - Diagram of selected urban materials: two pictures of the sample under natural lighting, the correspondent measured colour given as a RGB uniform colour, the correspondent in the CIE L\*a\*b\*, the corresponding Munsell chip plate when samples were lit by D65 illuminant and the measured spectral reflectance.

Aluminium;

- *green-bluish materials*, such as Green Oxidated Copper and blue (RAL 5005) varnished Aluminium;
- *clear grey materials*, such as Plaster, natural Aluminium, anodized Aluminium, clear (RAL 9006) varnished Aluminium, Ostuni stone;
- *darker grey and black ones*, such as Pietra Serena Stone, Slate Stones.

### 5. CUSTOMIZING THE SPECTRAL POWER DISTRIBUTION

Recently, the necessity to have a better method for characterizing the colour rendering quality of LEDs has increased the debate about the effectiveness of the traditional colour rendering metric (CIE-CRI) (Schanda, 2002; Bodrogi et al., 2005; Davis and Ohno, 2005). The traditional CIE-CRI is a fidelity metric, used to measure the

ability of a light source to render a defined set of colour's samples in comparison to a reference illuminant (Commission Internationale de l'Éclairage, 1995). On the other hand, "fidelity" is not always the desirable property of a light source, because, in some situations, the colour saturation is preferred (Judd, 1967; Smet et al., 2011; Houser, Tiller and Hu 2004). In relation to this, some studies were recently performed in residential and retail contexts (Knight, 2013; Rea and Freyssinier, 2013), showing that a wide range of chromaticity can appear 'white' or 'minimal tint' and that such chromaticity do not belong to the Black Body Locus (BBL). With illuminants with chromaticity below the BBL, colours of the items appeared more striking and white objects appeared brighter. In this regard, LEDs can perform a sharp spectral variation, optimizing their SPDs in order to maintain high CRI while increasing the ratio between the lumen output and the optical power of the light source (Luminous Efficiency of Optical Radiation, LER).

### 5.1 SELECTING THE METRICS OF COLOUR RENDERING INDEX

In order to design a set up for a perceptual evaluation of the appearance of urban materials (and their colours) in relation to different SPDs, a set of illuminants for two different values of correlated colour temperatures (CCT), 3000K and 5000K, were designed to compare different CCTs and different SPD, in order to obtain better chromatic rendering or more vivid colours in relation to red/orange and green/blue materials or to render more luminous and texturized the appearance for the grey ones.

For the evaluation of colour rendering, three different indices have been considered:

- CRI ( $R_a$ ) for the evaluation of colour fidelity;
- CQS ( $Q_a$ ) (Davis and Ohno, 2010) which uses the saturated chromatic samples and does not penalize the increase in the score of saturation without tint distortion. Some illuminants were built to maximize several chromatic samples in relation to the previous clustered categories (e.g. red, red/yellow, green/blue). The CQS method defines the gamut area scale  $Q_g$  that is calculated as the relative gamut area formed by CIELAB  $a^*$ ,  $b^*$  coordinates of the 15 colour samples illuminated by the test illuminant. The  $Q_g$  value is normalized by the gamut area produced by the CIE D65 and multiplied by 100.
- TM-30-15 is a standard for quantifying colour rendering properties of light sources, published by the Illuminating Engineering Society in 2015. This

Technical Memorandum describes a method for evaluating light source colour rendition, quantifying the fidelity (closeness to a reference) through a Fidelity Index ( $R_f$ ) and gamut (increase or decrease in chroma) through a Gamut Index ( $R_g$ ) of a light source (TM-30-15, 2015). The method also generates a colour vector graphic that indicates average hue and chroma shifts, which helps in interpreting the values of  $R_f$  and  $R_g$ . This graphical representation is very useful to understand the difference between two SPDs with the same value of  $R_g$  index (i.e. 100) in rendering the appearance of different colour samples. In particular,  $R_g > 100$  means an average increase in saturation;  $R_g < 100$  means an average decrease in saturation.

## 6. EXPLORATORY SUBJECTIVE ASSESSMENT OF LIT MATERIALS

### 6.1 DESIGN OF THE EXPERIMENT: MATERIALS SELECTION AND LIGHT BOOTH

The second part of the research about the relationship of lighting and urban materials was focused on testing a smaller amount of material samples under different lighting conditions in a controlled experimental light booth equipped with LED lighting sources. In each different categorized chromatic and material cluster, the most representative samples were chosen in order to represent different hues (red/yellow/green-blue/clear grey) but also different application in the city (facade, pavement, basement, monuments, roofs) (Figure 2).

The light booth is a small chamber (80x76x58cm) with internal surfaces in achromatic medium grey ( $\rho = 0.36$ ) and LEDs lights sources placed at the top of the booth. It is equipped with 5, separately controllable channels: Phosphor converted cold white (5000K), Phosphor converted warm white (3000K), generic Red LED with a dominant wavelength of 624 nm and a typical Spectral Half-width (nm)  $\Delta\lambda_{1/2}=20$  nm, generic Green LED with dominant wavelength of 505 nm and a typical Spectral Half-width (nm)  $\Delta\lambda_{1/2}=30$  nm, generic Blue LED with dominant wavelength of 455 nm and a typical Spectral Half-width (nm)  $\Delta\lambda_{1/2}=20$  nm.

The intensity of each colour is set up by a PWM constant voltage LED driver controlled by the DMX protocol: the DMX controller is an electronic board connected to a laptop through a USB port. A dedicated software running on the laptop was used to select the required lighting mixture for the experiment (Figure 3). The average illuminance measured on the surface of the sample was about 70 lux which



Figure 2 - Selected urban materials for the experiment from left to right: Oxidated Copper Green, Ostuni Natural Stone, Brick Forum Oro, Brick Fermette Cod 160, Porphyry Stone

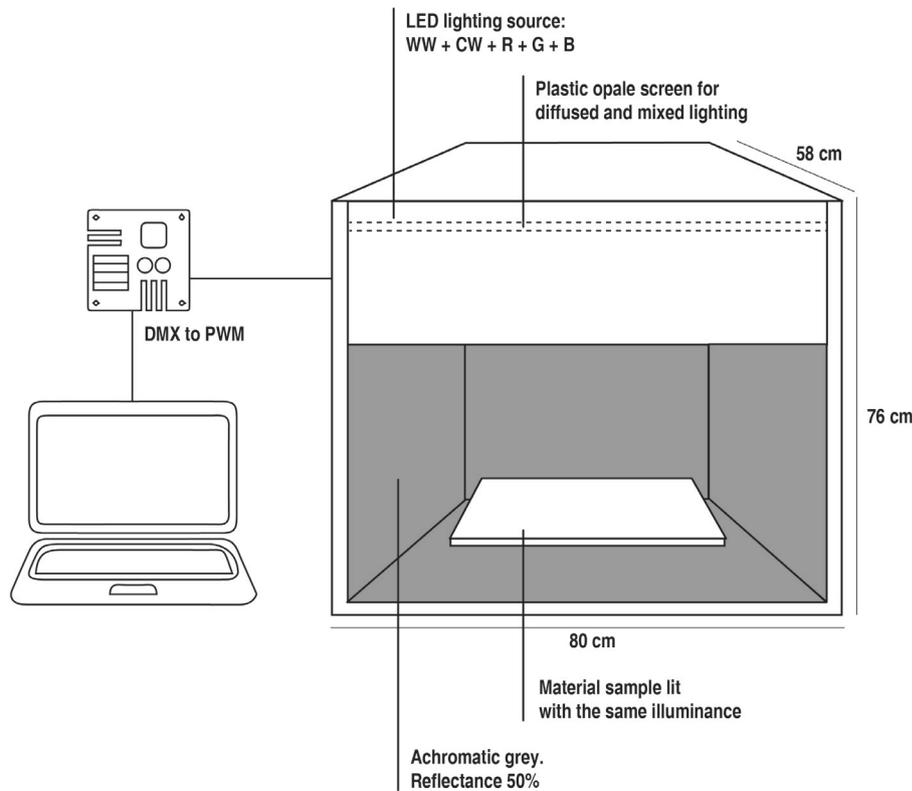


Figure 3 - Lighting booth set up: main features and dimensions

was considered a suitable average value for architectural lighting in urban spaces.

**6.2 DESIGNING THE ILLUMINANTS:  
EXPERIMENT HYPOTHESIS**

To properly evaluate the gamut area (tint distortion and increase/decrease of saturation), it is important to select colour samples whose reflection's spectra cover all real current and future pigment absorption's spectra to preclude gaming. Gaming means that the SPD of an illuminant could be tailored in order to improve the score of the index, but do not improve the fidelity of a specific colour plate: in fact it is possible to introduce a small perturbation in the visible spectrum to exploit specific details of the reflectance samples used for colour rendering index calculation (Smet et al., 2013). For this reason, TM-30 colour sample dataset has been chosen for evaluating the gamut area of each proposed illuminant.

**Hypothesis 01:**

**High colour rendering of the materials**

Two illuminants with a high value of CRI and CQS (at least 90) and with different colour temperatures were proposed (3000K-5000K). In particular for the high colour rendering 3000K illuminant (Figure 4):

- $Q_1 > 90$  and  $Q_2 > 90$  for materials clustered in Red group;
- $Q_7 > 90; Q_8 > 90$  for materials in Grey group;
- $Q_2 > 90; Q_3 > 85; Q_4 > 90$  for Yellow-Orange group;
- $Q_{10} > 95; Q_{11} > 95; Q_{12} > 95$  for Green/Blue group.

For the high colour rendering 5000K illuminant (Figure 5):

- $Q_1 > 90$  and  $Q_2 > 85$  for materials clustered in Red group;
- $Q_7 > 90; Q_8 > 90$  for materials in Grey group;
- $Q_2 > 85; Q_3 > 90; Q_4 > 95$  for Yellow-Orange group;
- $Q_{10} > 85; Q_{11} > 85; Q_{12} > 95$  for Green/Blue group.

For both the illuminants, the main colour rendering differences were located in the green sample ( $Q_6$ ), the orange sample ( $Q_2$ ) and light blue ( $Q_{11}$ ) sample, so it was expected a good colour rendering for red and yellow materials (bricks and porphyry stones) and for green/bluish ones (oxidized copper plate). All the illuminants developed according to the

Figure 4 - (left) TM-30 Gamut Area Plot: Test is a 3000K illuminant (high fidelity colour rendering index); Reference illuminant is a blackbody at 3000K


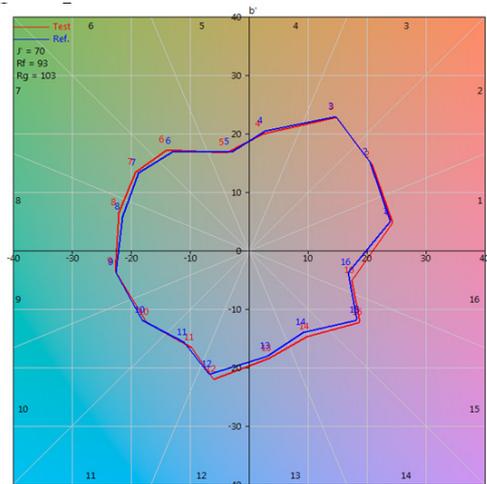


Figure 5 - (right) TM-30 Gamut Area Plot: Test is 5000K illuminant (high fidelity colour rendering index); Reference illuminant is daylight at 5000K

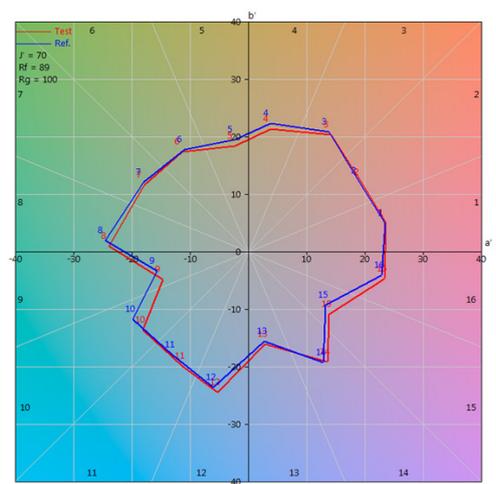

hypothesis 01 were constrained to be near the BBL ( $\Delta u'v' < 0.01$ ). This hypothesis was defined for permanent floodlighting of historical buildings and monuments whose image should be preserved and whose colours and textures of original material should be rendered in their original and true majesty (Schanda, 2001).

#### **Hypothesis 02:**

#### **Enhance colour saturation for more vivid and luminous appearance of the material**

The use of more saturated coloured lighting in the city was hypothesized useful for creating more interesting, pleasurable experiences, for accenting elements, enhancing volumes and in particular the architectural materials, for creating a more pleasant environment (Gardner, 2006; Van Santen, 2006; Schwendinger, 2009). Three different illuminants were designed: 3000K, 3149K and 5000K, for obtaining more vivid colours in red/orange and green/blue materials and more luminous and texturized appearance for the grey ones. To reach this scope, a set of SPD with enhanced gamut area and low colour distortion were designed ( $CQS > 80$ ): on the basis of the literature review, the chromaticity of this light source was placed below the BBL on CIE 1976 ( $u', v'$ ) colour space. In relation to this,

some works were recently published showing that a wide range of chromaticity can appear 'white' or 'minimal tint' and that such chromaticity do not belong to the BBL (Knight, 2013; Rea and Freyssinier, 2013).

The warm illuminant (3000K) with high saturation was designed to increase the saturation for colour samples in the orange-red, blue and green area. This illuminant was expected to increase the lightness and to enhance the perceived saturation of yellow/orange/red and green/bluish materials (Figure 6).

The warm illuminant (3150 K) with moderate saturation was designed with high values of CQS for the samples  $Q_1 > 95$  (deep red),  $Q_4 > 90$  (gold yellow) and  $Q_{12} > 90$  (deep blue). This illuminant was expected to increase the lightness and to enhance the texturization of clear/white/grey materials (Figure 7). The main difference between this illuminant and the previous one is the value of CIE colour rendering index, which is  $R_a = 67$  for the high saturation SPD and 95 for the other.

The cold illuminant (5000 K) with high saturation was designed with a low value of fidelity colour rendering index ( $R_a = 67$ ) and an increase of saturation for colour sample in the orange/red, azure, violet and in the green area (Figure 8).

Figure 6 - (left) TM-30 Gamut Area Plot: Test is 3000K illuminant (high saturation); Reference illuminant is a blackbody at 3000K



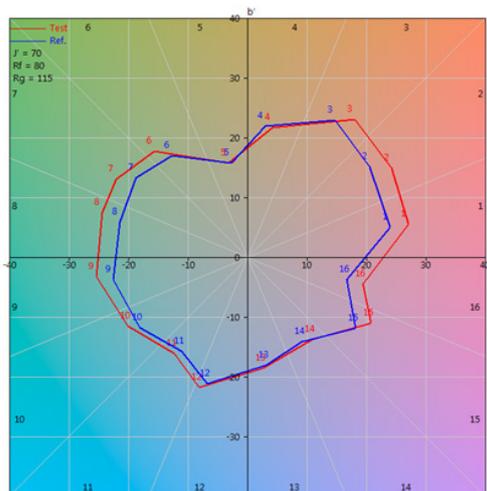


Figure 7 - (right) TM-30 Gamut Area Plot: Test is 3150K illuminant (moderate saturation); Reference illuminant is a blackbody at 3000K

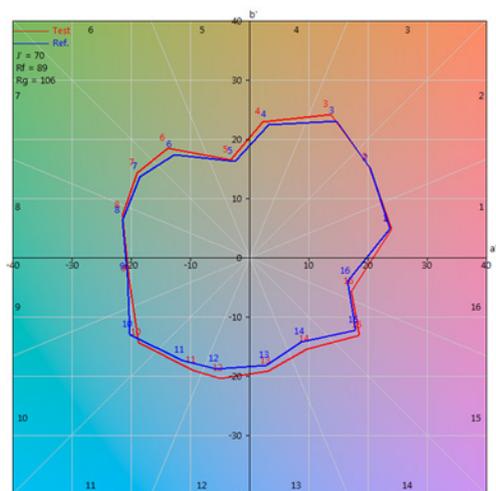

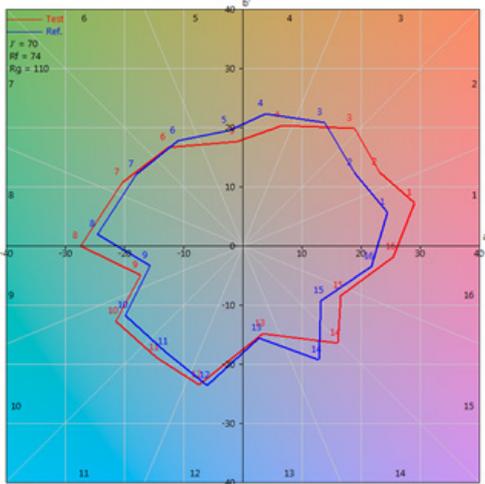

**Lighting receipts (illuminants)**

LEDs lighting receipts were both based on the previously described hypothesis and were conceived in order to perform the lighting perception assessment with the users. The

reference illuminants were designed in two CCT and with a standard CRI (A1 @ 3000K CRI 84 and B1 @ 5000K CRI 80) and were compared for each material in order to understand people inclination in choosing one CCT or another (the results of this part of the experiment are not discussed in this paper).

The illuminants with high CRI (93) were also designed in two different CCT (A2 @ 3000K and B2 @ 5000K) and compared with the reciprocal reference illuminants. The illuminants with a SPD with enhanced gamut area and low colour distortion were designed in the two CCT (A3 @ 3000 and B3 @ 5000K) and were used in comparison with the reciprocal reference illuminants for coloured materials. More than this, a moderate saturated warm illuminant (C3 @ 3150K) was designed to be compared with clear achromatic materials. The horizontal illuminance ( $E_h$ ) values were set up and measured to be equal throughout the experiment and between the different illuminants (Figure 9).

Figure 8 - TM-30 Gamut Area Plot: Test is 3150K illuminant (moderate saturation); Reference illuminant is daylight at 5000K

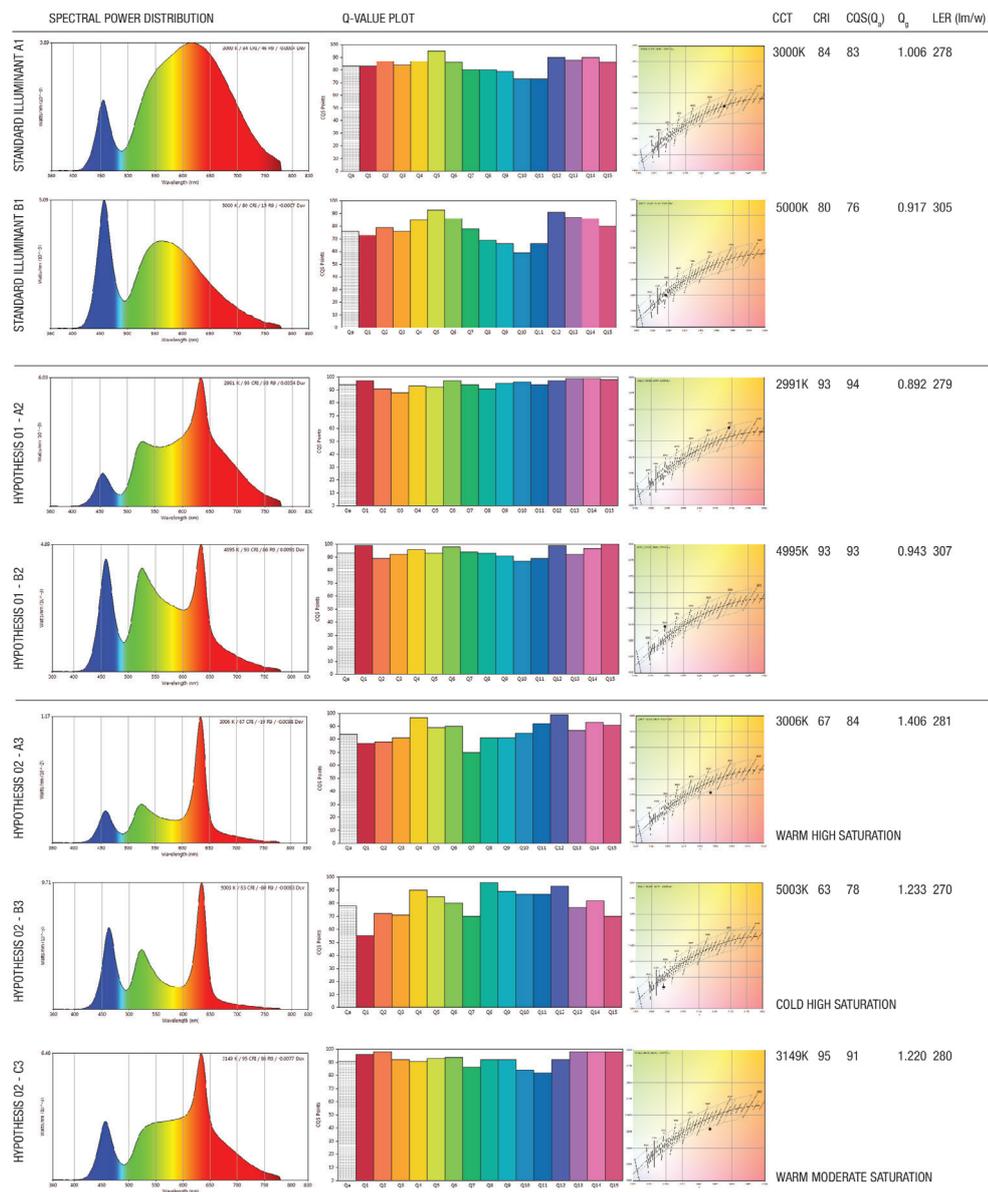


Figure 9 - Representation of selected SPDs for reference illuminants, hypothesis 01 and hypothesis 02

### 6.3 LIGHTING ASSESSMENT

In order to test the lighting influence in perceiving urban materials and to investigate the impact of the lighting design on the appearance of materials, a qualitative and quantitative cross-cultural investigation from users perspective was conducted. 26 volunteering normal colour vision students (53% Male – 47% Female; average age 28 years old; 40% Italy, 13.3% Brazil; 13.3% Lebanon; 33% Ecuador, Colombia, Philippines, Turkey, France) participated to the test. The test consisted in watching the selected 5 materials [Figure 2] under 7 different lighting conditions (illuminants) coupled in opponents for a pairwise comparison:

- Reference Illuminant (A1-B1) vs Hypothesis1 (A2-B2);
- Reference Illuminant (A1-B1) vs Hypothesis2 (A3-B3-C3).

Participants were adapted to each lighting condition and were asked a series of questions in order to assess the naturalness of the appearance (e.g. realism and colour fidelity), the enhancement of texturization (e.g. tri-dimensional appearance), the enhancement of colours vividness (e.g. saturation) and the augmented luminosity (e.g. brightness) of materials. An Ishihara test was performed preliminarily to check eventual colour blindness between participants. During the perceptive tests, the order of the questions and materials was randomized.

## 7. RESEARCH RESULTS

A preliminary elaboration of data was performed with a statistical analysis (Likelihood ratio) in order to identify the main perceived differences

between the lighting receipts. The quantitative statistical data were supported by qualitative reflections derived from the interviews performed during the experiment. This was aimed to depict a more complete and clear understanding of the relationship between lighting and urban material perception from the user perspective. Qualitative descriptions were re-written, analysed and mapped in relation to statistical elaborations (Table 1).

#### *The naturalness and realism of urban materials*

The coloured (red, yellow, green/bluish) and the achromatic urban materials, under the illuminants with high CRI (A1 @ 3000K and B1 @ 5000K), were not perceived as more natural and better rendered by the participants. The majority of them “could not notice a big, appreciable difference” and showed problems in remembering the colour rendering of the material in natural conditions (“under the sunlight”). Participants noticing the realism of materials enhanced by the illuminant with high CRI perceived it as “improved if compared with the previous (reference) one”, “looking more natural”, gaining in “three-dimensionality and depth of the grouts” in comparison to the reference one, which was perceived more “flat and uniform” (e.g. Porphyry Stone). On the other hand, other participants perceived the materials under the high CRI illuminants as deviating the real colours by oversaturating in the yellow bands and lacking naturalness (e.g. Ostuni Natural Stone).

#### *Saturated and vivid urban materials*

All the coloured urban materials (red, yellow, green/bluish) under the illuminants with high saturation (A3 @ 3000K and B3 @ 5000K) were perceived as more vivid, more saturated and generally more colourful. In comparison to the

Table 1 - Statistical elaboration of data with \*p≤0.05 \*\*p≤0.01 \*\*\*p≤0.001 level of significance

MATERIALS	LIGHTING RECEIPTS – ILLUMINANT COMPARISON WITH MATERIALS			PERCEIVED COLOUR FIDELITY AND REALISM	PERCEIVED COLOUR SATURATION AND BRILLANCE	
	REFERENCE ILLUMINANT	HYPOTHESES 1	HYPOTHESES 2	(%) RATING MORE NATURAL LOOKING MATERIALS IN HYPOTHESES 1	(%) RATING MORE VIVID MATERIALS IN HYPOTHESES 2	(%) RATING MORE LUMINOUS MATERIALS IN HYPOTHESES 2
Oxidated Copper Green	A1	A2	A3	30**	90***	100***
	B1	B2	B3	62.5	100***	100***
Ostuni Natural Stone	A1	A2	C3	19.23***	-	96.15***
Brick Forum Oro (yellow)	A1	A2	A3	30.77***	92.30***	96.15***
Brick Fermette Cod 160 (red)	A1	A2	A3	46.15	100***	100***
	B1	B2	B3	25**	75**	87.5***
Porphyry Stone	A1	A2	A3	20**	90**	90**
	B1	B2	B3	25**	75**	87.5***

reference illuminants, almost all the participants noted an “enhancement of hue”, an “enrichment of chromatic rendering”, an “evidently saturation of colours” that were “better perceived” as more “saturated, vibrant, vivid”: “it looks more vivid, is like photography, better to look at, pleasant for the eyes”. Urban materials appeared “flat, pale and lifeless” under the reference illuminants; meanwhile under the saturated illuminants they were perceived as “more appealing”, giving a “chromatic balance” and “doing justice” to the colours of the urban materials. In addition to this, “when compared with the whiter grouts”, many participants noticed different hues that were unperceivable before.

*Brighter, more luminous and textured materials*

All the coloured urban materials (red, yellow, green/bluish) and also the achromatic ones under the illuminants with high saturation (A3 @ 3000K, B3 @ 5000K and C3 @ 3149K) were perceived as more luminous and brighter, even if several participants explained that phenomena as a change in the CCT. The achromatic clear sample of material looked “evidently whiter” and details stood out in a more striking way. In fact, participants noted that the texturization was improved under the saturated illuminant: “You notice more the imperfection” and it was more evidenced the “texturing and grit”, meanwhile with the reference illuminants the material appears “smooth”. “Grain becomes easier and faster to be perceived” with the saturated spectrum that makes the materials “less flat and with more details” (e.g. in Porphyry Stone) by “standing out more the three dimensions”.

## 8. DISCUSSION, LIMITS AND FURTHER STEPS

This experimental study was conceived as a work about both measuring the properties of urban materials and hypothesising different lighting conditions to enhance their appearance properties. The study was also aimed at exploring the chromatic differences between urban and architectural materials in order to explore the urban colourscape at night, which is a particular topic of research in its infancy stage, from what stems from the literature review. More than this, the experiments highlighted the importance of the lighting conditions in which the urban materials are perceived: manipulating the SPD with specific characteristics can significantly change the user’s perception of the same material and enhance the attractiveness and appeal toward the architectural and urban surfaces. All the hypotheses about the illuminants were derived both from lighting

design practice and also from experimental studies conducted in different contexts (retail and domestic environments). In this regard, this experiment conducted on the urban material could be considered pivotal and the first on its genre for the applicative sector. The user assessment has been useful to confirm several hypothesis about the relationship between LEDs lighting, urban materials and people perception. Further steps of this study would provide a wider sample of participants to the experiment and the inclusion of experts’ point of view on the topic. As a preliminary statement, this study can conclude that there is a wide margin for sophisticating and customizing the lighting receipts for specific urban materials in order to create better, more expressive and appealing nocturnal cities.

## ACKNOWLEDGEMENTS

We would like to thank the companies (B&B Sas, Copperture Snc, Fils and Maspe) that supplied the materials used to develop the experiments. In addition, we are really grateful to Konica Minolta for having provided the instrument CM-700d to perform and elaborate the measurements on the material samples. Finally, we are expressing our gratitude to all the users that were involved in the perceptive assessment at the Laboratorio Luce of the Politecnico di Milano. A special thanks goes to the Eng. Danilo Paleari that was part of the team in providing the test lighting booth used in the experiment.

## FUNDING

This research did not receive any specific grant from funding agencies in the public, commercial, or not-for-profit sectors.

## CONFLICT OF INTEREST

The author declares that nothing has affected his objectivity or independence in the production of this work. Neither the author nor his immediate family member have any financial interest in the people, topics or companies involved by this article. Neither the author nor his immediate family member had a professional relationship with the people and companies cited in this article. Neither the author nor his immediate family member are involved in a legal dispute with the people and the companies cited in this article. No conflict of interest including financial, personal or other relationship with other people and organization within three years of beginning the submitted work that could inappropriately influence, or be perceived to influence, this work.

## BIBLIOGRAPHY

- Bagordo G.M. (2012), 'Materiale, colore, architettura', in *Colore e Colorimetria Vol. VIII/A*: pp 347-353
- Bellia L., Agresta N. and Pedace A. (2013) 'Proposta di una metodologia per illuminare i centri storici', *Luce 307 /2014 ISSN 1828-0560*: pp. 105-109
- Bodrogi P., Csuti P., Szabò F. and Schanda J. (2005) 'Why does the CIE Colour Rendering Index fail for white RGB LED light sources?', *AIC Colour '05, Granada, Spain*. 8-13
- Borsotti M. (2012) 'Architetture contemporanee e colore: amplificazioni di senso' in *Colore e Colorimetria Vol. VIII/A*: pp 315-322
- Casciani D., Musante F., Rossi M. (2014) 'A work in progress on lighting the colours of urban materials: the night-time identity of the city revealed', *X Conferenza del Colore , GdC Associazione Italiana del Colore, Università degli Studi di Genova, 11-12 September 2014*
- CIE 136 - 2000, *Guide to the lighting of urban areas*
- Commission Internationale de l'Eclairage. (1995). 'Method of measuring and specifying colour rendering properties of light sources'. Vienna (Austria): CIE. Technical Report CIE 013.3-1995.
- Davis W. and Ohno Y., (2005) 'Toward an improved color rendering metric, in *Fifth International Conference on Solid State Lighting*', *Proc. SPIE , 5941, 59411G*.
- Davis W., Ohno Y. (2010), 'Color Quality Scale', *Opt. Eng.* 49(3) 033602 doi: 10.1117/1.3360335
- Gardner C. (2006) 'The use and misuse of coloured light in the urban environment', *Optics & Laser Technology, Vol. 38, N° 4-6, pp. 366-376*
- Houser K., Tiller D. and Hu X. (2004) 'Turning the fluorescent spectrum for the trichromatic visual response: A pilot study'. *Leukos 2004*;1:7-24.
- Judd D.B., (1967) 'A flattery index for artificial illuminants', *Illum Eng.* 62:593-598.
- Knight C. (2013), 'Summary: Investigations on the use of LED modules for optimised colour appearance in retail applications', available at: [http://www.xicato.com/sites/default/files/documents/Summary\\_Investigations\\_on\\_the\\_use\\_of\\_LED\\_modules\\_for\\_optimized\\_color\\_appearance\\_in\\_retail\\_applications.pdf](http://www.xicato.com/sites/default/files/documents/Summary_Investigations_on_the_use_of_LED_modules_for_optimized_color_appearance_in_retail_applications.pdf)
- Lancaster M., (1996) 'Colourscape', London: Academy
- Lynch K. (1960) 'The image of the city'. The MIT Press, Cambridge
- Nasar J. L. (1998) 'The evaluative Image of the City'. Sage Thousand Oaks, CA
- Rea M.S., Freyssinier J.P., (2013) 'White lighting for residential applications', *Lighting Res. Technol.* 2013; 45: 331-344
- Schanda J., (2001) 'City beautification by coloured lights – an art or kitsch'. *Istanbul Lighting Conf.* 2001
- Schanda J., (2002) 'The concept of colour rendering revisited', *CGIV '2002 First European Conference on Color in Graphics Imaging and Vision, Univ. Poitiers, France, 04. 2-5.*
- Schwendinger L. (2009) 'City beautification: colour and light', presented at *CIHAC, Mexico City*
- Smet K., Ryckaert W.R., Pointer M.R., Deconinck G. and Hanselaer P. (2011) 'Colour appearance rating of familiar real objects'. *Color Res Appl.* 36:192-200.
- Smet K.A.G., Schanda J., Whitehead L. and Luo R.M., (2013) 'CRI 2012: A proposal for updating the CIE colour rendering index?', *Lighting Res. Technol.* 2013; 45: 689-709
- TM-30-15 (2015) *IES Method for Evaluating Light Source Color Rendition*
- Valan F. (2011) 'Linee guida per il Piano colore della città di Milano: proposta per un Piano Attuativo d'Ambito', in *Colore e Colorimetria Vol. VII/A*: pp 259-264
- Van Santen C. (2006) 'Light Zone City: Light Planning in the Urban Context'. Birkhäuser Publishers for Architecture
- Xiaomin D. and Yilin K. (2009) 'Urban Colourscape Planning. A Colour Study of the Architecture of Karlskrona', Thesys of Blekinge Tekniska Högskola for the Master's degree of European Spatial Planning and Regional Development
- Yin, E. (2003) *Urban 'Colourscape Planning and Design'*, World Architecture Press